

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
04	SCI	9	4.6	20	25

*Robert B. Schott*  
 LICENSED LANDSCAPE ARCHITECT  
 August 15, 2008  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.


To accompany plans dated 6-7-10

2006 NEW STANDARD PLAN NSP T62


**GRAVEL BAG BERM (TYPE 3A) SPACING TABLE**

SLOPE OF ROADWAY (PERCENT)	1 to 3.9	4 to 5.9	6 to 7.9	8 to 10	10+
INTERVAL BETWEEN BERM	100'	75'	50'	25'	12'

For slope of less than 1%, install barriers only if erosion/sediment is prevalent

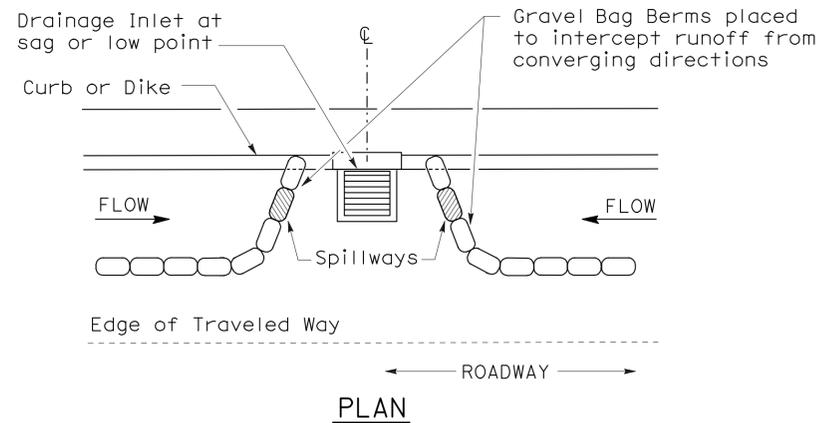


**PLAN**  
**CONFIGURATION FOR SAG POINT INLET (GRAVEL BAG BERM)**

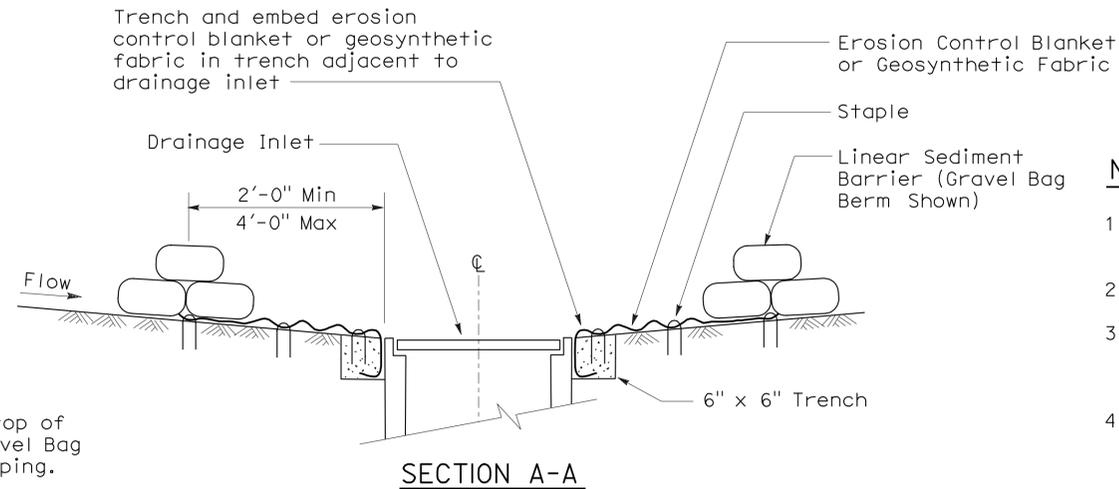

**SECTION A-A**


**NOTES:**

1. Place safety cones adjacent to drainage inlet protection.
2. Dimensions may vary to fit field conditions.
3. Install a minimum of 3 gravel bag berms upstream of each drainage inlet to be protected.
4. Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
5. Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated or paved.


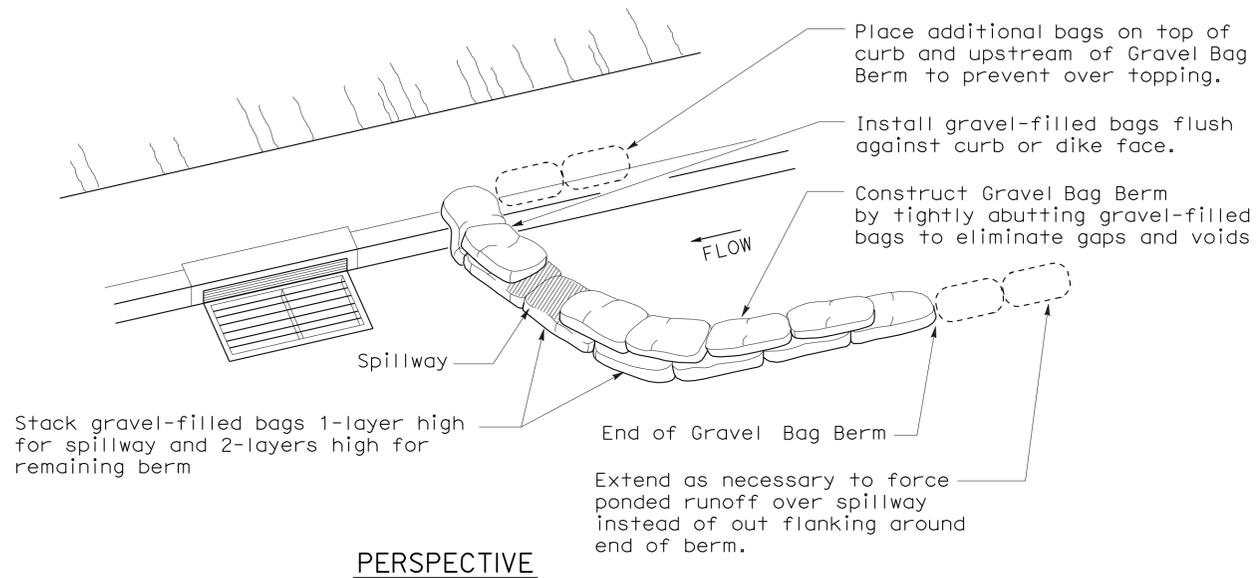


**PERSPECTIVE**

Stack gravel-filled bags 1-layer high for spillway and 2-layers high for remaining berm

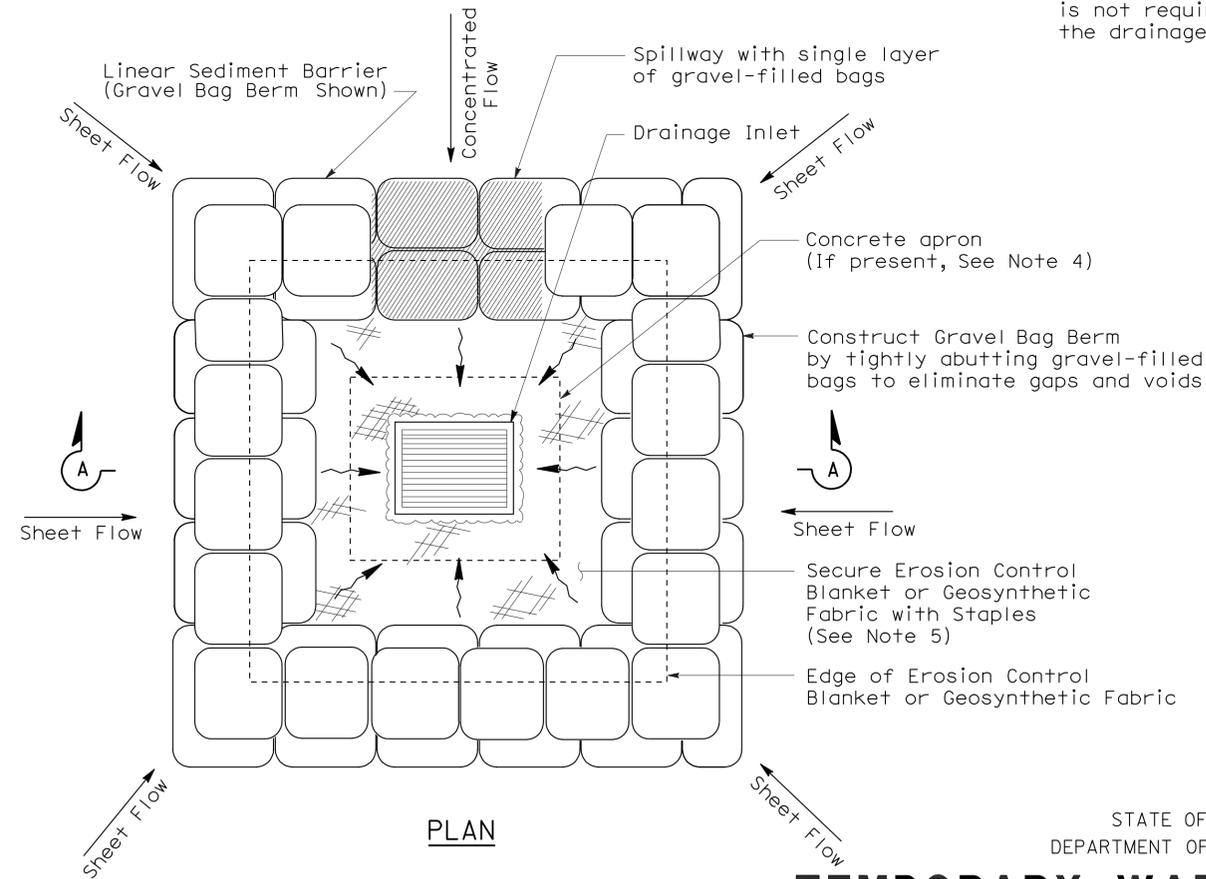

**PLAN**  
**TEMPORARY DRAINAGE INLET PROTECTION (TYPE 3B)**

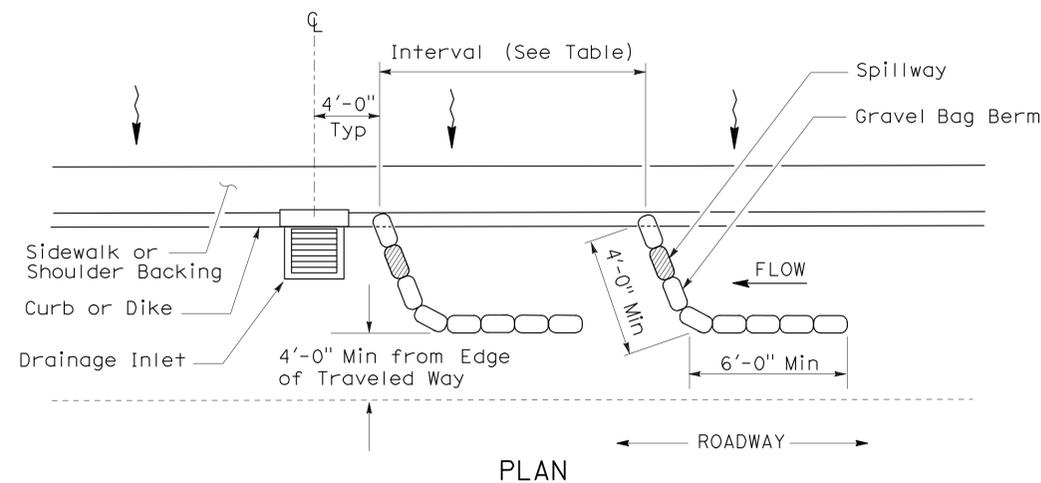

**PLAN**  
**TEMPORARY DRAINAGE INLET PROTECTION (TYPE 3A) (GRAVEL BAG BERM)**

**STATE OF CALIFORNIA**  
**DEPARTMENT OF TRANSPORTATION**  
**TEMPORARY WATER POLLUTION CONTROL DETAILS (TEMPORARY DRAINAGE INLET PROTECTION)**

NO SCALE  
NSP T62 DATED AUGUST 15, 2008 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.