

	<b>M</b>	
Maint	MAINTENANCE	
Max	MAXIMUM	
MB	METAL BEAM	
MBB	METAL BEAM BARRIER	
MBGR	METAL BEAM GUARD RAILING	
Med	MEDIAN	
MGS	MIDWEST GUARDRAIL SYSTEM	
MH	MANHOLE	
Min	MINIMUM	
Misc	MISCELLANEOUS	
Misc I & S	MISCELLANEOUS IRON AND STEEL	
Mkr	MARKER	
Mod	MODIFIED, MODIFY	
Mon	MONUMENT	
MP	METAL PLATE	
MPGR	METAL PLATE GUARD RAILING	
MR	MOVEMENT RATING	
MSE	MECHANICALLY STABILIZED EMBANKMENT	
Mt	MOUNTAIN, MOUNT	
MtI	MATERIAL	
MVP	MAINTENANCE VEHICLE PULLOUT	
	<b>N</b>	
N	NORTH	
NB	NORTHBOUND	
No.	NUMBER (MUST HAVE PERIOD)	
Nos.	NUMBERS (MUST HAVE PERIOD)	
NPS	NOMINAL PIPE SIZE	
NS	NEAR SIDE	
NSP	NEW STANDARD PLAN	
NTS	NOT TO SCALE	
	<b>O</b>	
Obir	OBLITERATE	
OC	OVERCROSSING	
OD	OUTSIDE DIAMETER	
OF	OUTSIDE FACE	
OG	ORIGINAL GROUND	
OGAC	OPEN GRADED ASPHALT CONCRETE	
OGFC	OPEN GRADED FRICTION COURSE	
OH	OVERHEAD	
OHWM	ORDINARY HIGH WATER MARK	
O-O	OUT TO OUT	
Opp	OPPOSITE	
OSD	OVERSIDE DRAIN	
	<b>P</b>	
p	PAGE	
PAP	PERFORATED ALUMINUM PIPE	
PB	PULL BOX	
PC	POINT OF CURVATURE, PRECAST	
PCC	POINT OF COMPOUND CURVE, PORTLAND CEMENT CONCRETE	
PCMS	PORTABLE CHANGEABLE MESSAGE SIGN	
PCP	PERFORATED CONCRETE PIPE, PRESTRESSED CONCRETE PIPE	
PCVC	POINT OF COMPOUND VERTICAL CURVE	
PEC	PERMIT TO ENTER AND CONSTRUCT	
Ped	PEDESTRIAN	
Ped OC	PEDESTRIAN OVERCROSSING	
Ped UC	PEDESTRIAN UNDERCROSSING	
Perm MtI	PERMEABLE MATERIAL	

	<b>P continued</b>	
PG	PROFILE GRADE	
PI	POINT OF INTERSECTION	
PJP	PARTIAL JOINT PENETRATION	
Pkwy	PARKWAY	
PL, PL	PLATE	
P/L	PROPERTY LINE	
PM	POST MILE, TIME FROM NOON TO MIDNIGHT	
PN	PAVING NOTCH	
POC	POINT OF HORIZONTAL CURVE	
POT	POINT OF TANGENT	
POVC	POINT OF VERTICAL CURVE	
PP	PIPE PILE, PLASTIC PIPE, POWER POLE	
PPL	PERFORMED PERMEABLE LINER	
PPP	PERFORATED PLASTIC PIPE	
PRC	POINT OF REVERSE CURVE	
PRF	PAVEMENT REINFORCING FABRIC	
PRVC	POINT OF REVERSE VERTICAL CURVE	
PS&E	PLANS, SPECIFICATIONS AND ESTIMATES	
PS, P/S	PRESTRESSED	
PSP	PERFORATED STEEL PIPE	
PT	POINT OF TANGENCY	
PVC	POLYVINYL CHLORIDE	
Pvmt	PAVEMENT	
	<b>Q</b>	
Qty	QUANTITY	
	<b>R</b>	
R	RADIUS	
R & D	REMOVE AND DISPOSE	
R & S	REMOVE AND SALVAGE	
R/C	RATE OF CHANGE	
RCA	REINFORCED CONCRETE ARCH	
RCB	REINFORCED CONCRETE BOX	
RCP	REINFORCED CONCRETE PIPE	
RCPA	REINFORCED CONCRETE PIPE ARCH	
Rd	ROAD	
Reinf	REINFORCED, REINFORCEMENT, REINFORCING	
Rel	RELOCATE	
Repl	REPLACEMENT	
Ret	RETAINING	
Rev	REVISED, REVISION	
Rdwy	ROADWAY	
RHMA	RUBBERIZED HOT MIX ASPHALT	
Riv	RIVER	
RM	ROAD-MIXED	
RP	RADIUS POINT, REFERENCE POINT	
RR	RAILROAD	
RSP	ROCK SLOPE PROTECTION, REVISED STANDARD PLAN	
Rt	RIGHT	
Rte	ROUTE	
RW	REDWOOD, RETAINING WALL	
R/W	RIGHT OF WAY	
Rwy	RAILWAY	

	<b>S</b>	
S	SOUTH, SUPPLEMENT	
SAE	STRUCTURE APPROACH EMBANKMENT	
Salv	SALVAGE	
SAPP	STRUCTURAL ALUMINUM PLATE PIPE	
SB	SOUTHBOUND	
SC	SAND CUSHION	
SCSP	SLOTTED CORRUGATED STEEL PIPE	
SD	STORM DRAIN	
Sec	SECOND, SECTION	
Sep	SEPARATION	
SG	SUBGRADE	
Shld	SHOULDER	
Sht	SHEET	
Sim	SIMILAR	
±	STATION LINE	
SM	SELECTED MATERIAL	
Spec	SPECIAL, SPECIFICATIONS	
SPP	SLOTTED PLASTIC PIPE	
SS	SLOPE STAKE	
SSBM	STRAP AND SADDLE BRACKET METHOD	
SSD	STRUCTURAL SECTION DRAIN	
SSPA	STRUCTURAL STEEL PLATE ARCH	
SSPP	STRUCTURAL STEEL PLATE PIPE	
SSPPA	STRUCTURAL STEEL PLATE PIPE ARCH	
SSRP	STEEL SPIRAL RIB PIPE	
St	STREET	
Sta	STATION	
STBB	SINGLE THRIE BEAM BARRIER	
Std	STANDARD	
Str	STRUCTURE	
Surf	SURFACING	
SW	SIDEWALK, SOUND WALL	
Swr	SEWER	
Sym	SYMMETRICAL	
S4S	SURFACE 4 SIDES	
	<b>T</b>	
T	SEMI-TANGENT	
Tan	TANGENT	
TBB	THRIE BEAM BARRIER	
Tbr	TIMBER	
TC	TOP OF CURB	
TCB	TRAFFIC CONTROL BOX	
TCE	TEMPORARY CONSTRUCTION EASEMENT	
Tel	TELEPHONE	
Temp	TEMPORARY	
TG	TOP OF GRADE	
Tot	TOTAL	
TP	TELEPHONE POLE	
TPB	TREATED PERMEABLE BASE	
TPM	TREATED PERMEABLE MATERIAL	
Trans	TRANSITION	

	<b>T continued</b>	
TS	TRANSVERSE, TRAFFIC SIGNAL, TUBULAR STEEL	
Typ	TYPICAL	<b>U</b>
UC	UNDERCROSSING	
UD	UNDERDRAIN	
UG	UNDERGROUND	
UON	UNLESS OTHERWISE NOTED	
UP	UNDERPASS	<b>V</b>
V	VALVE, DESIGN SPEED	
Var	VARIABLE, VARIES	
VC	VERTICAL CURVE	
VCP	VITRIFIED CLAY PIPE	
Vert	VERTICAL	
Via	VIADUCT	
Vol	VOLUME	<b>W</b>
W	WEST, WIDTH	
WB	WESTBOUND	
WH	WEEP HOLE	
WM	WIRE MESH	
WS	WATER SURFACE	
WSP	WELDED STEEL PIPE	
Wt	WEIGHT	
WV	WATER VALVE	
WW	WINGWALL	
WWLOL	WINGWALL LAYOUT LINE	<b>X</b>
X Sec	CROSS SECTION	
Xing	CROSSING	<b>Y</b>
Yr	YEAR	
Yrs	YEARS	

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, LO.0/15.3	207	265

*Grace M. Tsushima*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
 Grace M. Tsushima  
 No. C49814  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

**UNIT OF MEASUREMENT SYMBOLS:**

Some of the symbols used in the project plan quantity tables and in the Bid Item List are:

**TABLE A**

SYMBOL USED	DEFINITIONS
ACRE	ACRE
CF	CUBIC FOOT
CY	CUBIC YARD
EA	EACH
GAL	GALLON
LB	POUND
LF	LINEAR FOOT
SQFT	SQUARE FOOT
SQYD	SQUARE YARD
STA	100 FEET
TAB	TABLET
TON	2,000 POUNDS

Some of the symbols used in the plans other than in the project plan quantity tables are:

**TABLE B**

SYMBOL USED	DEFINITIONS
ksi	KIPS PER SQUARE INCH
ksf	KIPS PER SQUARE FOOT
psi	POUNDS PER SQUARE INCH
psf	POUNDS PER SQUARE FOOT
lb/ft <sup>3</sup> , pcf	POUNDS PER CUBIC FOOT
tsf	TONS PER SQUARE FOOT
mph, MPH *	MILES PER HOUR
∅	NOMINAL DIAMETER
oz	OUNCE
lb	POUND
kíp	1,000 POUNDS
cal	CALORIE
ft	FOOT OR FEET
gal	GALLON

\* For use on a sign panel only

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


**ABBREVIATIONS  
(SHEET 2 OF 2)**

NO SCALE


RSP A10B DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A10B  
DATED MAY 20, 2011 - PAGE 2 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP A10B


### EXIT RAMP NEUTRAL AREA (GORE) TREATMENT

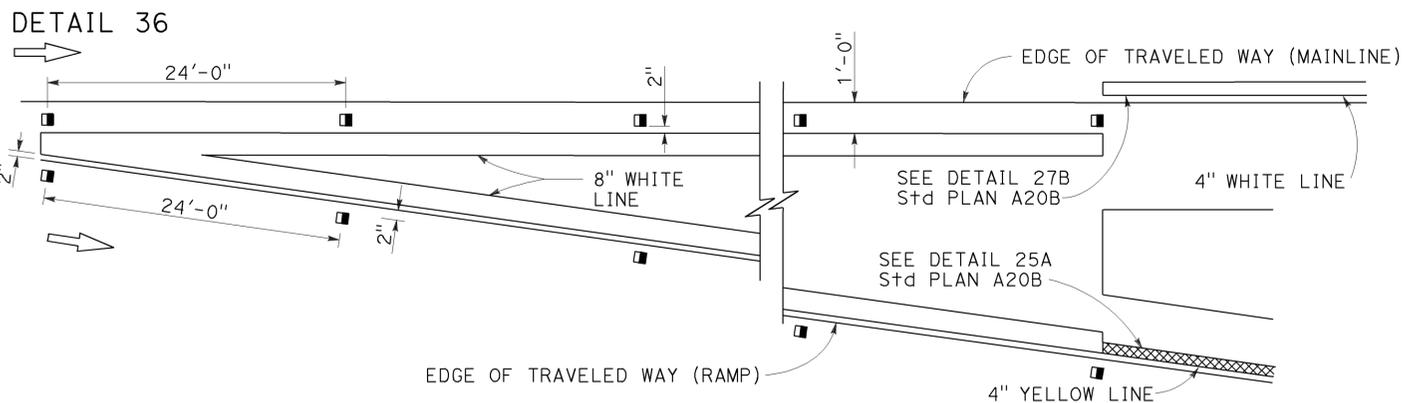

### ENTRANCE RAMP NEUTRAL AREA (MERGE) TREATMENT

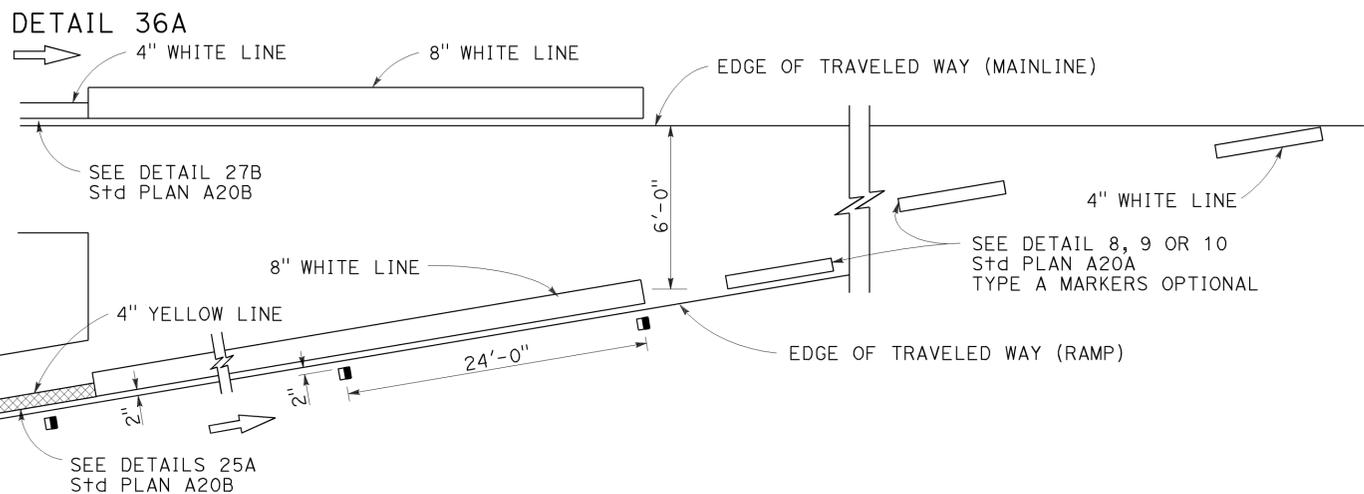


### ENTRANCE RAMP NEUTRAL AREA (ACCELERATION LANE) TREATMENT

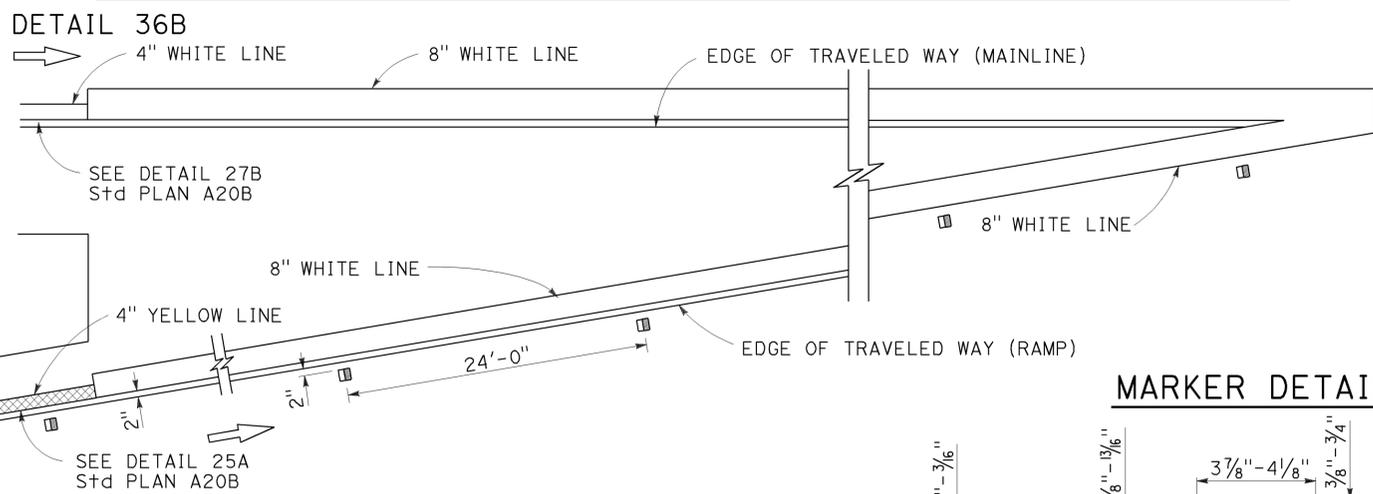

### MARKER DETAILS

#### LEGEND:

- MARKERS
- TYPE A WHITE NON-REFLECTIVE
  - ◻ TYPE C RED-CLEAR RETROREFLECTIVE
  - TYPE G ONE-WAY CLEAR RETROREFLECTIVE

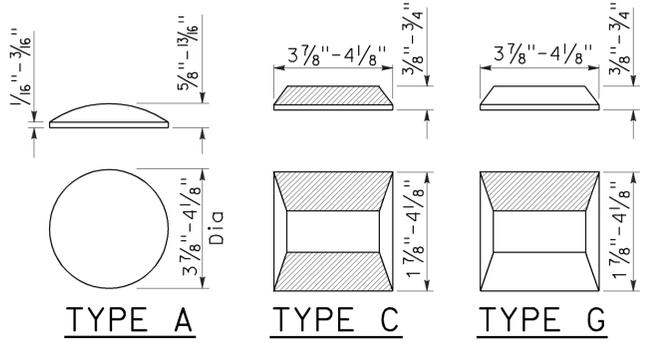

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	208	265



*Roberta L. McLaughlin*  
 REGISTERED CIVIL ENGINEER  
 No. C40375  
 Exp. 3-31-15  
 CIVIL  
 STATE OF CALIFORNIA

July 19, 2013  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 6-1-15

### LANE DROP AT EXIT RAMPS

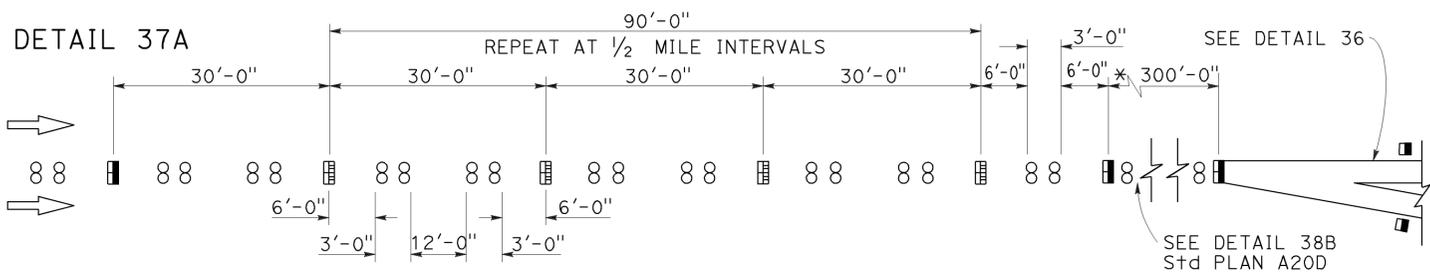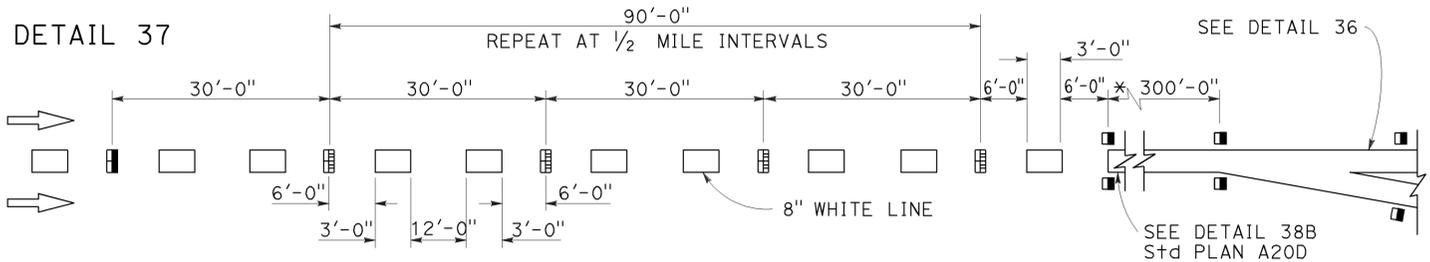

\* The solid channelizing line shown may be omitted on short auxiliary lanes where weaving length is critical.

### LANE DROP AT INTERSECTIONS

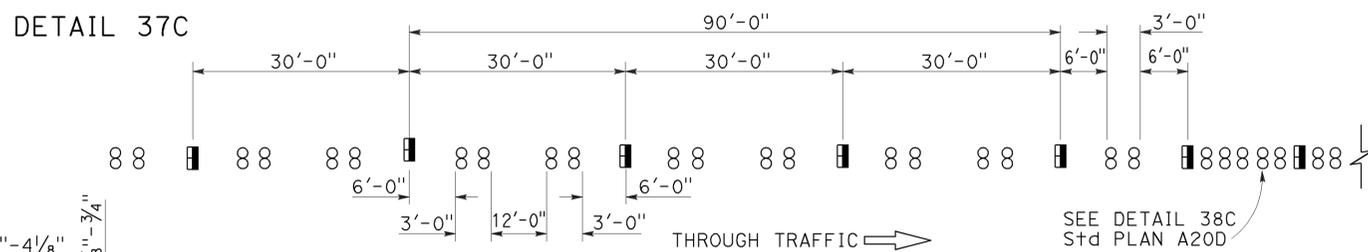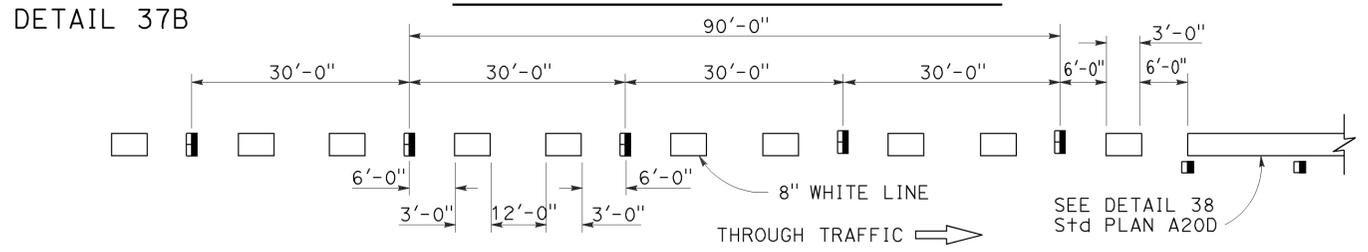

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKERS AND TRAFFIC LINE TYPICAL DETAILS**  
 NO SCALE


RSP A20C DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A20C DATED MAY 20, 2011 - PAGE 11 OF THE STANDARD PLANS BOOK DATED 2010.

### REVISED STANDARD PLAN RSP A20C


2010 REVISED STANDARD PLAN RSP A20C

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	209	265
<i>Roberta L. McLaughlin</i> REGISTERED CIVIL ENGINEER April 20, 2012 PLANS APPROVAL DATE <small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>					


TO ACCOMPANY PLANS DATED 6-1-15

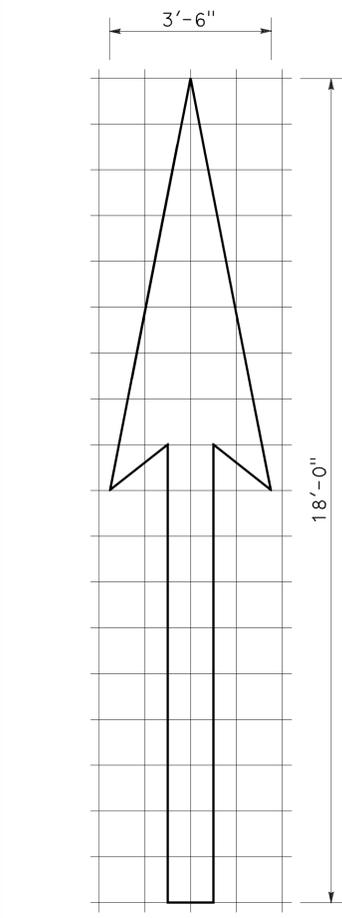


A=25 ft<sup>2</sup>  
**TYPE I 18'-0" ARROW**

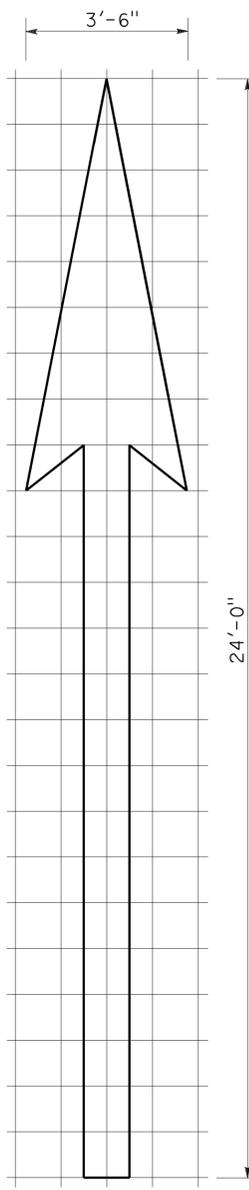


A=31 ft<sup>2</sup>  
**TYPE I 24'-0" ARROW**

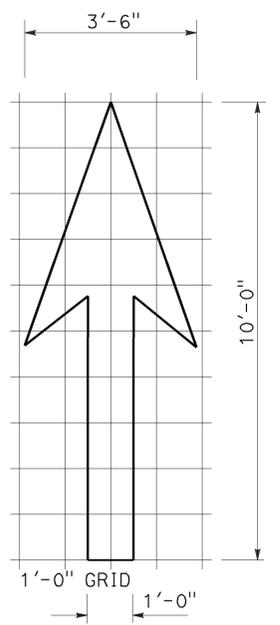


A=14 ft<sup>2</sup>  
**TYPE I 10'-0" ARROW**

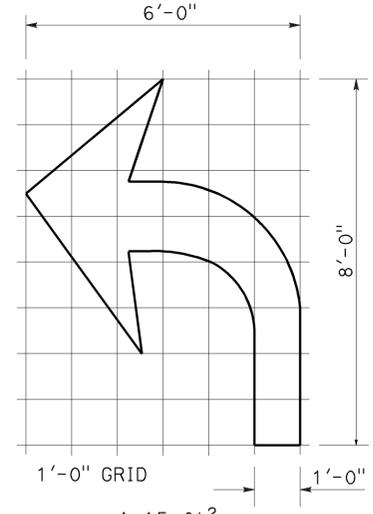


A=15 ft<sup>2</sup>  
**TYPE IV (L) ARROW**  
 (For Type IV (R) arrow, use mirror image)

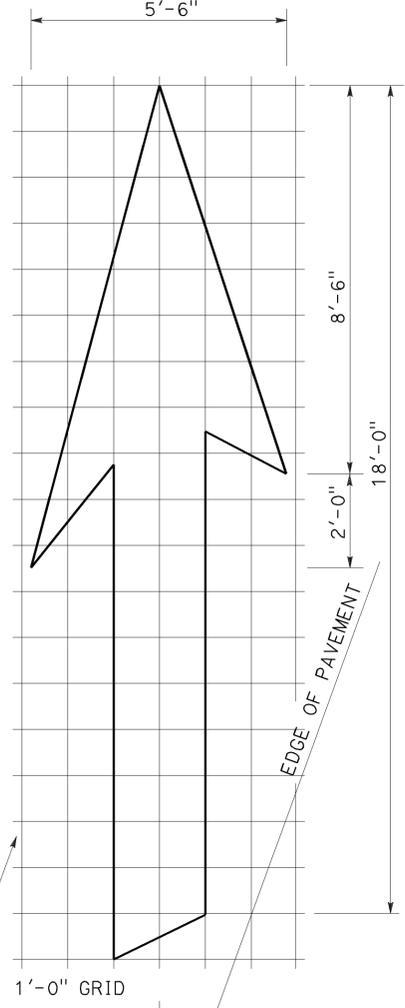


A=42 ft<sup>2</sup>  
**TYPE VI ARROW**  
 Right lane drop arrow  
 (For left lane, use mirror image)

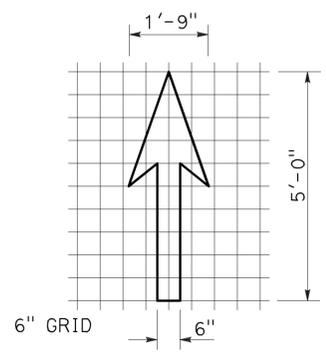


A=3.5 ft<sup>2</sup>  
**BIKE LANE ARROW**

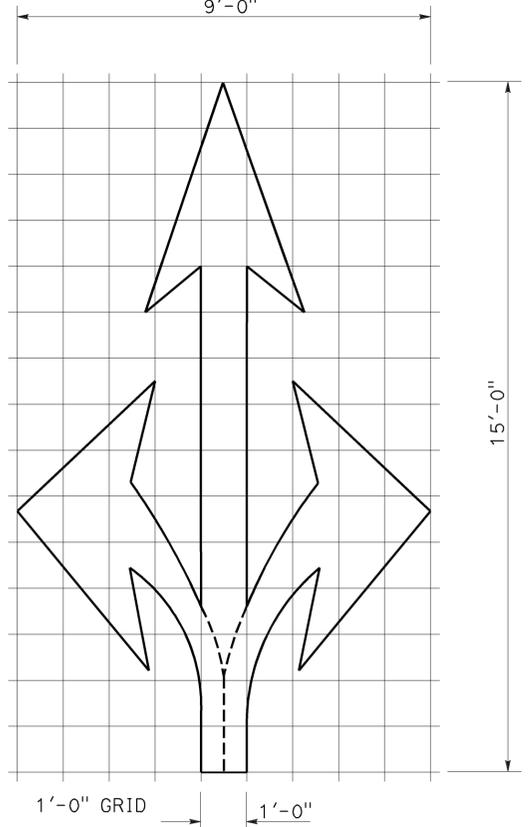

A=36 ft<sup>2</sup>  
**TYPE VIII ARROW**

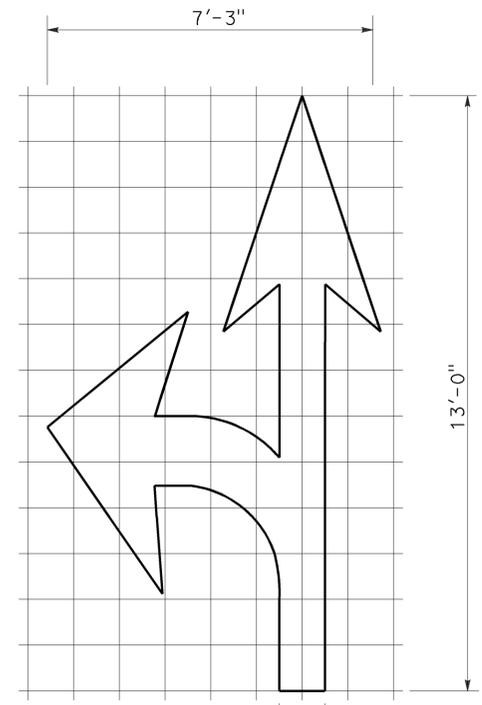

A=27 ft<sup>2</sup>  
**TYPE VII (L) ARROW**  
 (For Type VII (R) arrow, use mirror image)

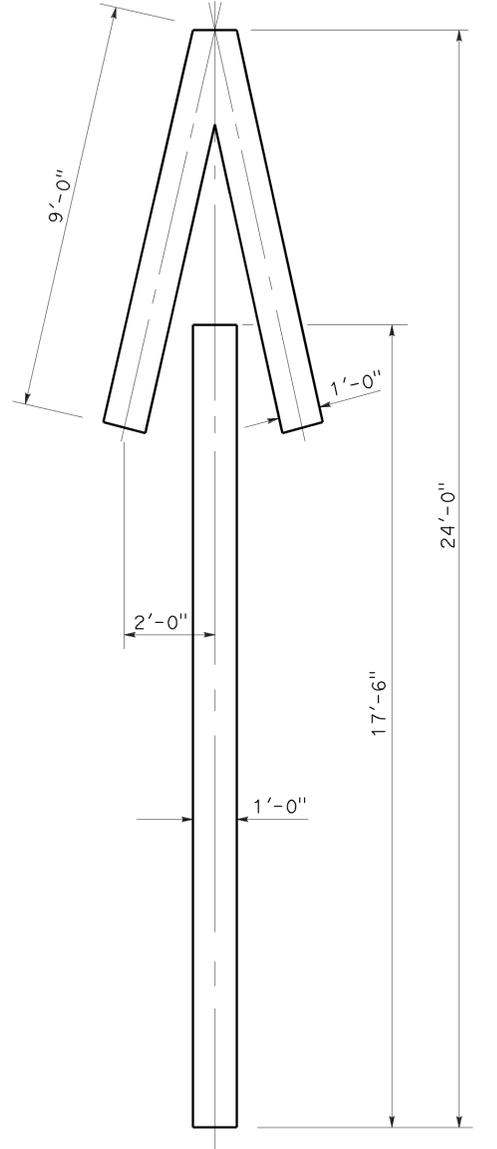

A=33 ft<sup>2</sup>  
**TYPE V ARROW**

**NOTE:**  
 Minor variations in dimensions may be accepted by the Engineer.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKINGS  
 ARROWS**  
 NO SCALE

RSP A24A DATED APRIL 20, 2012 SUPERSEDES STANDARD PLAN A24A DATED MAY 20, 2011 - PAGE 13 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A24A**

2010 REVISED STANDARD PLAN RSP A24A


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	210	265

Registered Professional Engineer  
 Roberta L. McLaughlin  
 No. C40375  
 Exp. 3-31-13  
 CIVIL  
 STATE OF CALIFORNIA


July 20, 2012  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 6-1-15

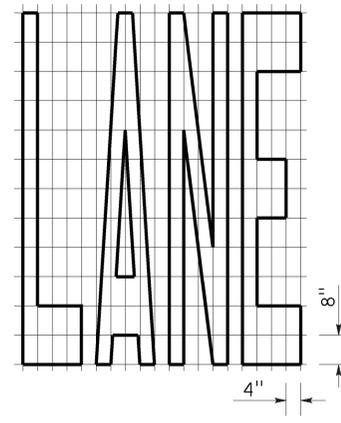


A=24 ft<sup>2</sup>

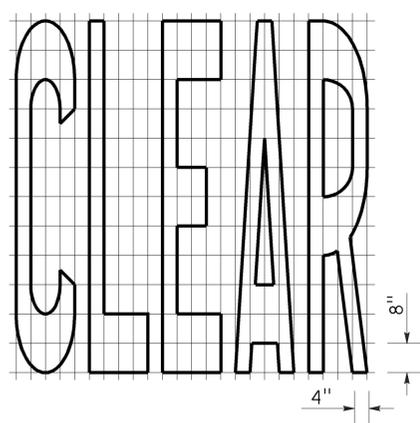


A=27 ft<sup>2</sup>

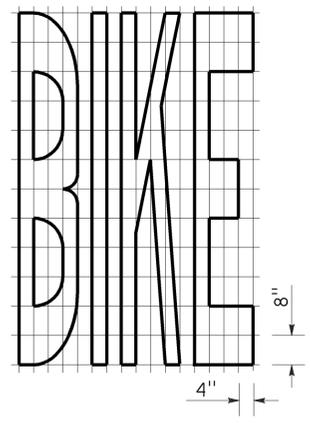


A=21 ft<sup>2</sup>

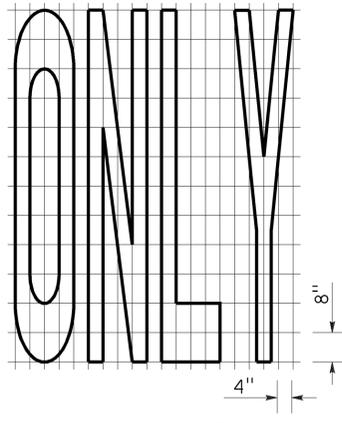


A=22 ft<sup>2</sup>

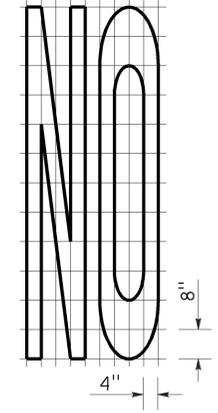


A=14 ft<sup>2</sup>

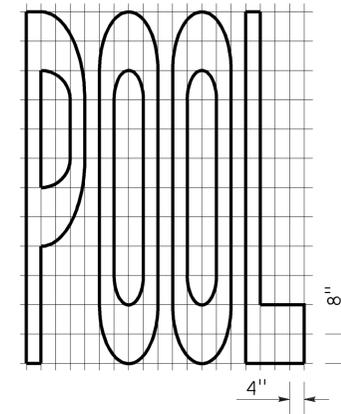


A=23 ft<sup>2</sup>

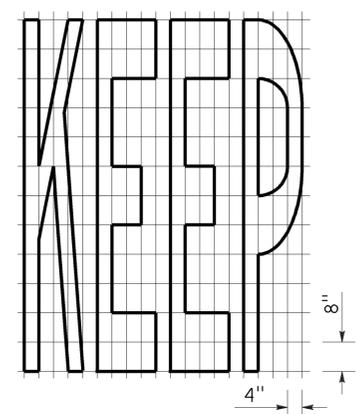


A=24 ft<sup>2</sup>

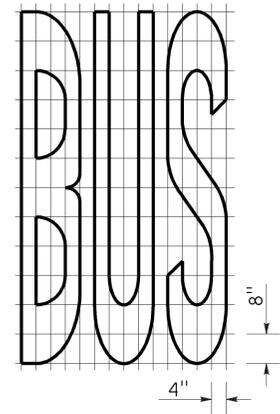

A=20 ft<sup>2</sup>


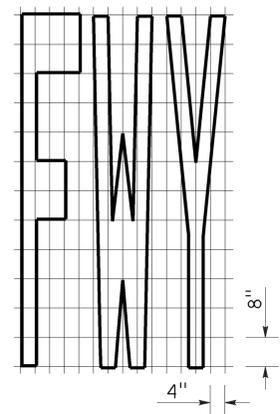


A=16 ft<sup>2</sup>

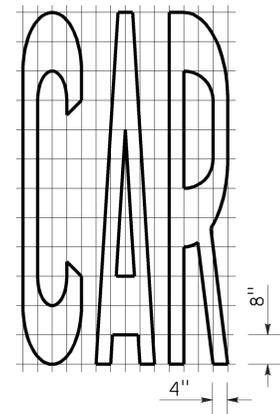


A=17 ft<sup>2</sup>

WORD MARKINGS			
ITEM	ft <sup>2</sup>	ITEM	ft <sup>2</sup>
LANE	24	NO	14
POOL	23	BIKE	21
CAR	17	BUS	20
CLEAR	27	ONLY	22
KEEP	24	FWY	16

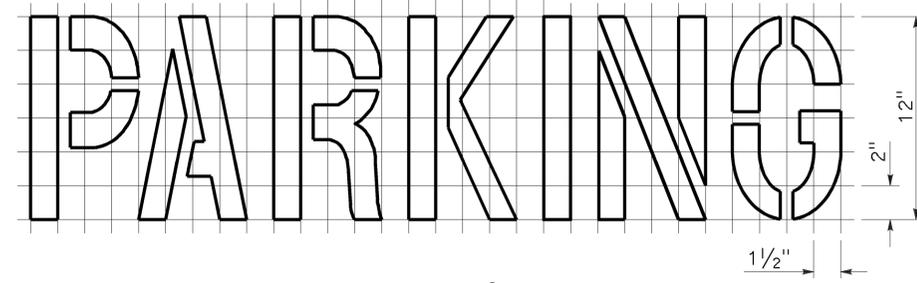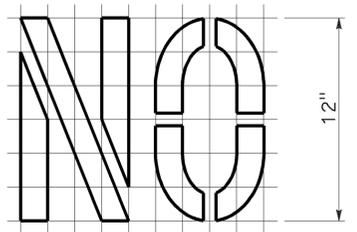

A=2 ft<sup>2</sup>  
See Notes 6 and 7

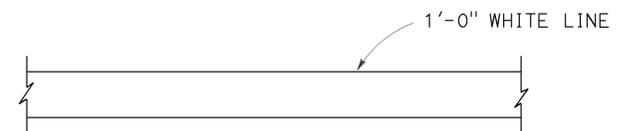

LIMIT LINE (STOP LINE)



↑  
DIRECTION OF TRAVEL  
YIELD LINE

**NOTES:**

1. If a message consists of more than one word, it should read "UP", i.e., the first word should be nearest the driver.
2. The space between words should be at least four times the height of the characters for low speed roads, but not more than ten times the height of the characters. The space may be reduced appropriately where there is limited space because of local conditions.
3. Minor variations in dimensions may be accepted by the Engineer.
4. Portions of a letter, number or symbol may be separated by connecting segments not to exceed 2" in width.
5. The words "NO PARKING" pavement marking is to be used for parking facilities. For typical locations of markings, see Standard Plans A90A and A90B.
6. The words "NO PARKING", shall be painted in white letters no less than 1'-0" high on a contrasting background and located so that it is visible to traffic enforcement officials.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKINGS**  
**WORDS, LIMIT AND YIELD LINES**  
 NO SCALE

RSP A24E DATED JULY 20, 2012 SUPERSEDES STANDARD PLAN A24E DATED MAY 20, 2011 - PAGE 17 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A24E**

2010 REVISED STANDARD PLAN RSP A24E

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, LO.0/15.3	211	265



Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA



TO ACCOMPANY PLANS DATED 6-1-15

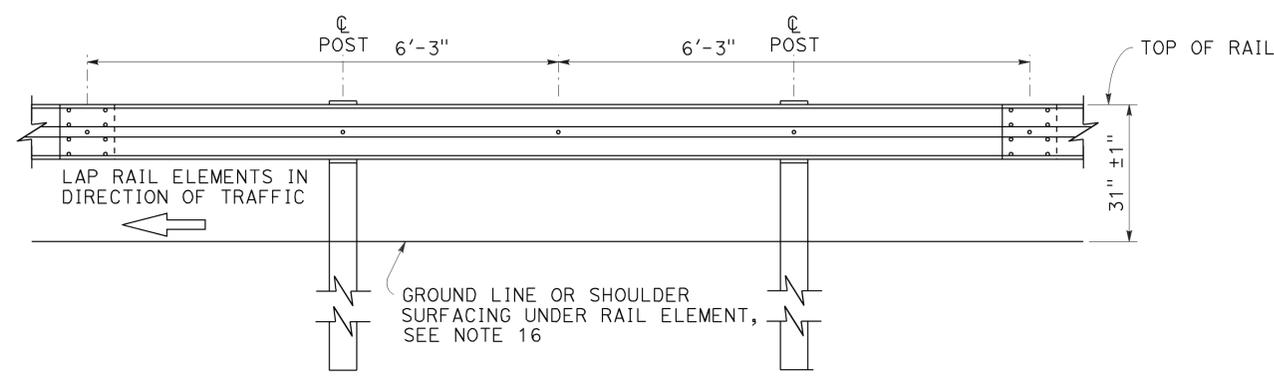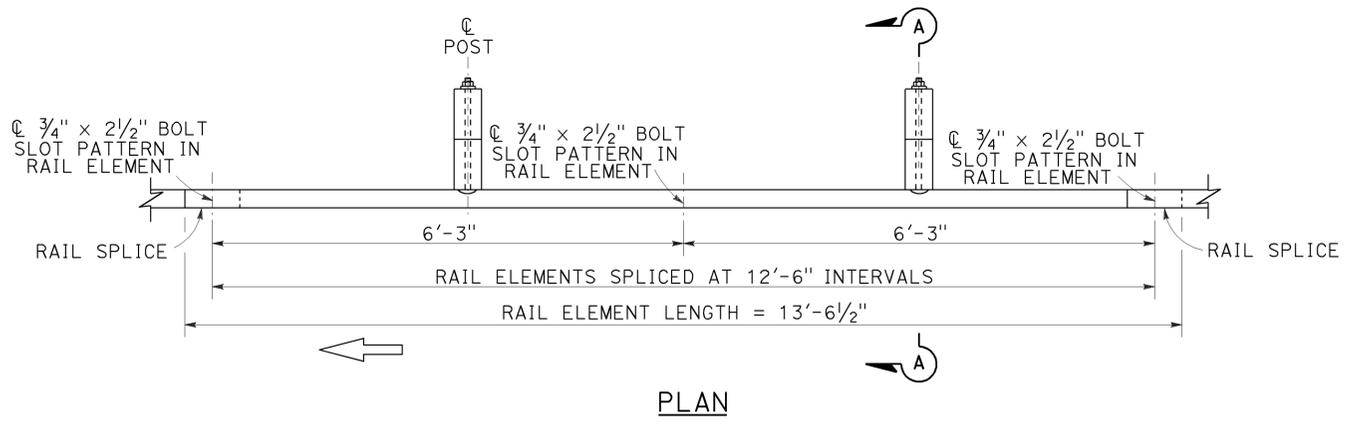

MIDWEST GUARDRAIL SYSTEM WITH WOOD POST AND BLOCKS

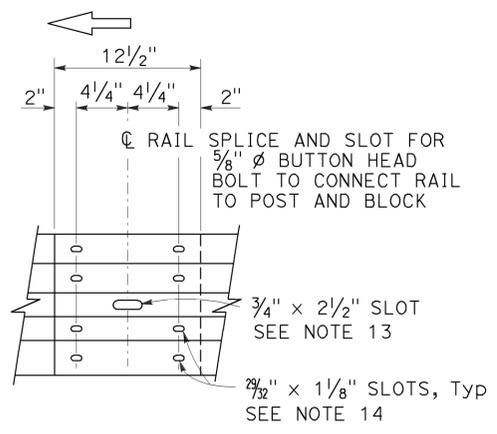

- Connect the over lapped end of the rail elements with  $\frac{5}{8}$ "  $\phi$  x  $1\frac{3}{8}$ " button head oval shoulder splice bolts inserted into the  $\frac{7}{32}$ " x  $1\frac{1}{8}$ " slots and bolted together with  $\frac{5}{8}$ "  $\phi$  recessed hex nuts. Recess of hex nut points toward rail element. A total of 8 bolts and nuts are to be used at each rail splice connection.
- The ends of the rail elements are to be overlapped in the direction of traffic (see details).
- Where end cap is to be attached to the end of a rail element, a total of 4 of the above described splice bolts and nuts are to be used.

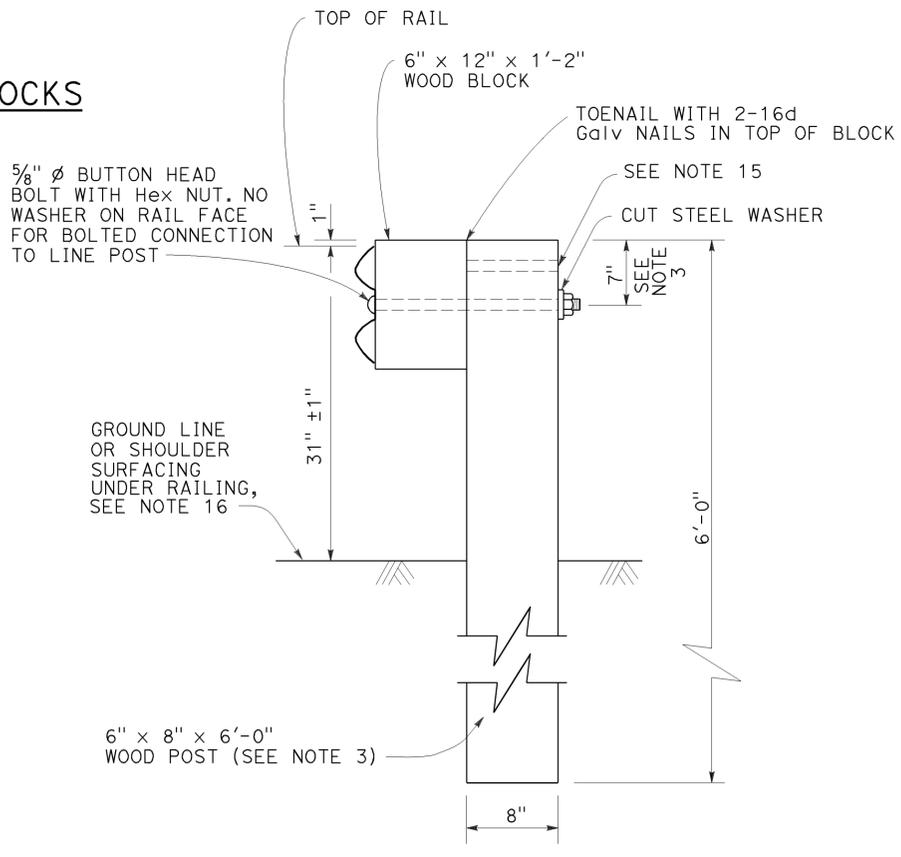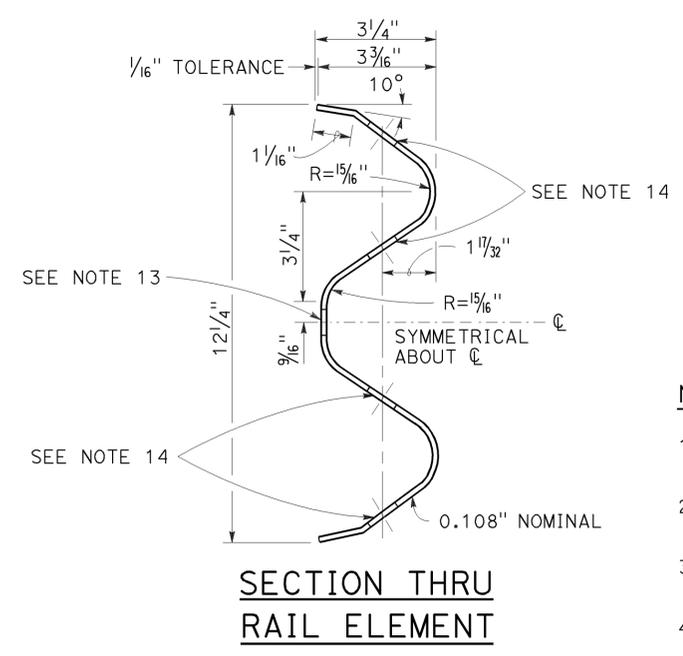

SECTION A-A  
TYPICAL WOOD LINE POST INSTALLATION  
See Note 4

NOTES:

- For details of steel post installations, see Revised Standard Plan RSP A77L2.
- For details of standard hardware used to construct MGS, see Revised Standard Plan RSP A77M1.
- For details of wood posts and wood blocks used to construct MGS, see Revised Standard Plan RSP A77N1.
- For additional installation details, see Revised Standard Plan RSP A77N3.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- For MGS typical layouts, see the A77P, A77Q and A77R Series of Standard Plans.
- If railing is connected to terminal system end treatment, use 31" height terminal system end treatment.
- For MGS end anchor details, see Revised Standard Plans RSP A77S1 and RSP A77T2.
- For details of MGS transition to bridge railing, see Revised Standard Plan RSP A77U4.
- For additional details of MGS connection to bridge railing, see Revised Standard Plans RSP A77U1, RSP A77U2 and RSP A77V1.
- For MGS connection details to abutments and walls, see Revised Standard Plan RSP A77U3.
- For typical MGS delineation and dike positioning details, see Revised Standard Plan RSP A77N4.
- Slotted hole for bolted connection of rail element to block and post. See "Section Thru Rail Element".
- Slotted holes for splice bolts to overlap ends of rail element. See "Section Thru Rail Element".
- Additional hole in uppermost portion of line post is for potential future adjustments of railing height. See Revised Standard Plan RSP A77N1.
- Install posts in soil.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

MIDWEST GUARDRAIL SYSTEM  
STANDARD RAILING SECTION  
(WOOD POST WITH WOOD BLOCK)


NO SCALE

RSP A77L1 DATED JULY 19, 2013 SUPPLEMENTS STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP A77L1

2010 REVISED STANDARD PLAN RSP A77L1



TO ACCOMPANY PLANS DATED 6-1-15

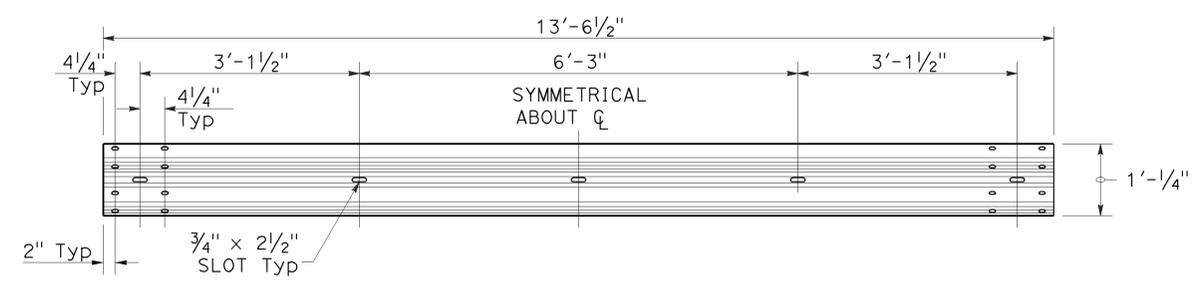

**TYPICAL RAIL ELEMENT**

**NOTE:**


1. Slotted holes for splice bolts to overlap ends of rail element.

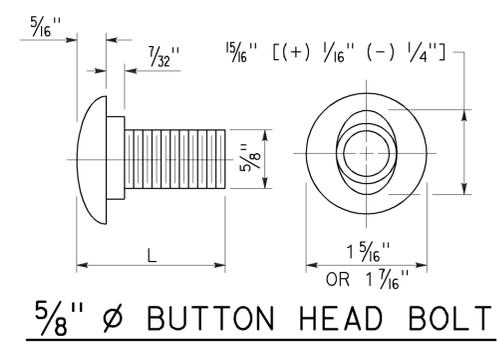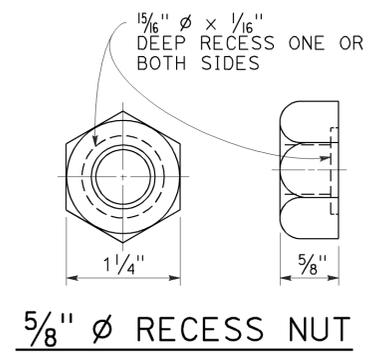


**BUTTON HEAD BOLT**

L	THREAD LENGTH
1 3/8"	FULL THREAD LENGTH
2"	FULL THREAD LENGTH
10"	4" Min THREAD LENGTH
18"	4" Min THREAD LENGTH
20"	4" Min THREAD LENGTH
22"	4" Min THREAD LENGTH
26"	4" Min THREAD LENGTH
36"	4" Min THREAD LENGTH
** 2 3/4"	2" Min THREAD LENGTH
** 19"	4" Min THREAD LENGTH

\*\* For nested rail applications.



**PLAN**

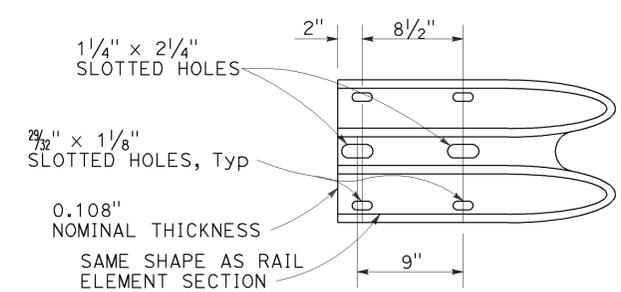

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM  
 STANDARD HARDWARE**

NO SCALE

RSP A77M1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77M1**

2010 REVISED STANDARD PLAN RSP A77M1

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, LO.0/15.3	213	265




Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.





REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

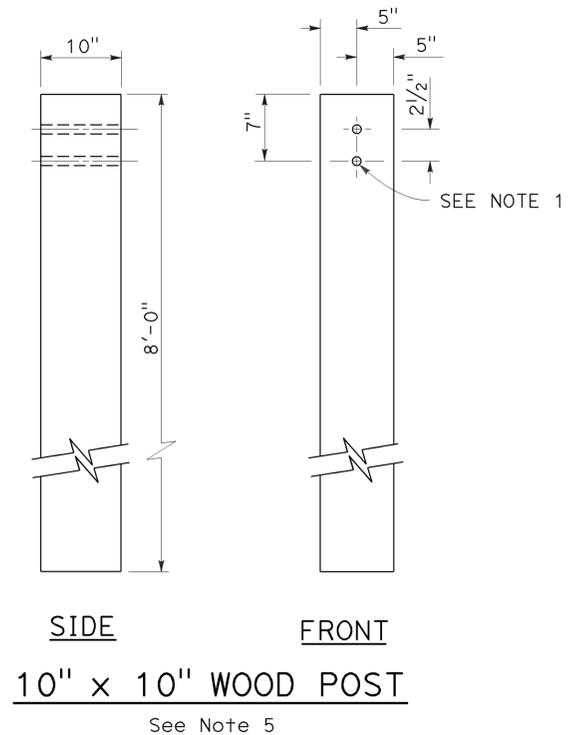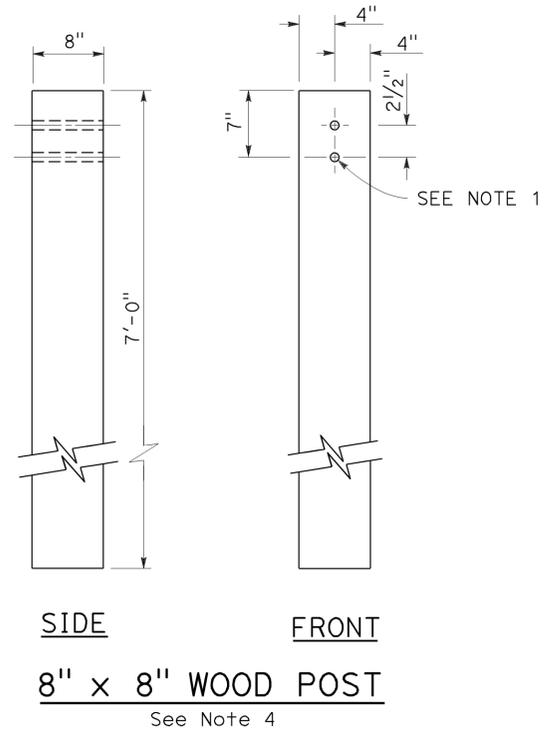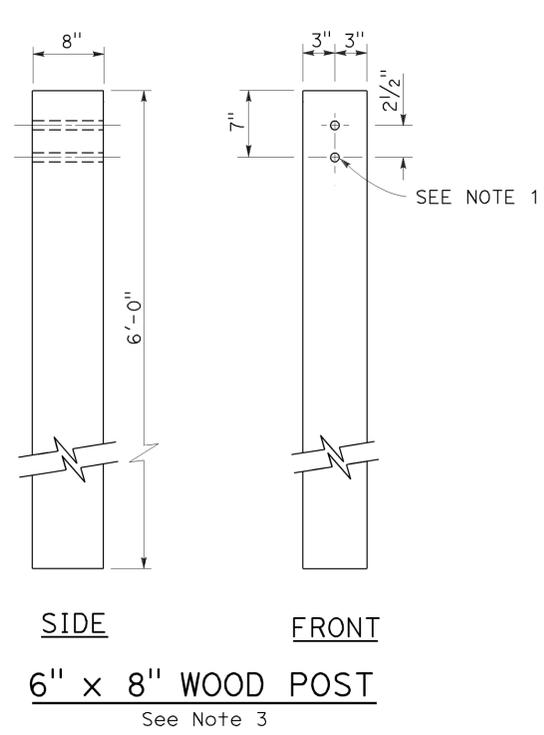

**NOTES:**

1. All holes in wood posts and blocks shall be  $\frac{3}{4}$ " Dia  $\pm$   $\frac{1}{16}$ ".
2. Dimensions shown for wood post are nominal.
3. This post and block combination used for standard line post sections of MGS.
4. This post and 8" x 12" block combination used for line post sections of MGS on narrow roadways.
5. This post and 8" x 12" block combination is typically used where strengthened line post sections of MGS are warranted to shield fixed objects.
6. See Revised Standard Plan RSP A77L3 for use of 6" x 8" and 8" x 8" wood blocks.

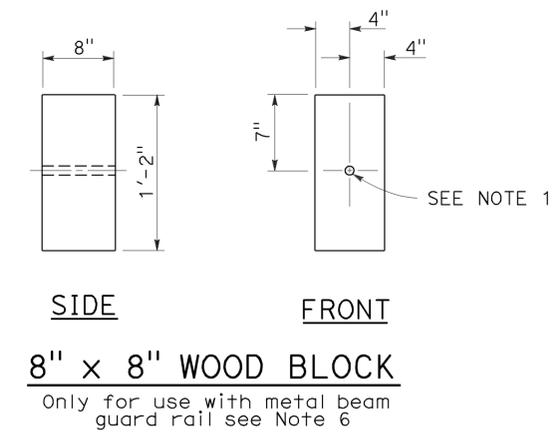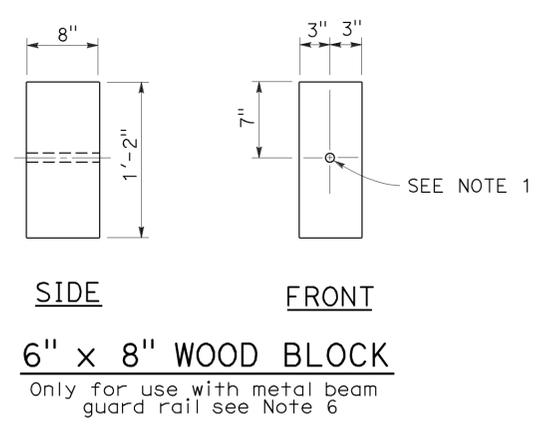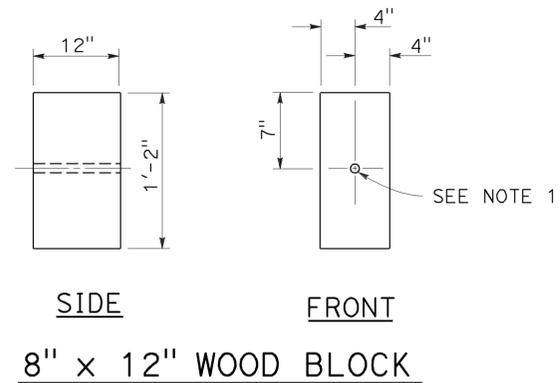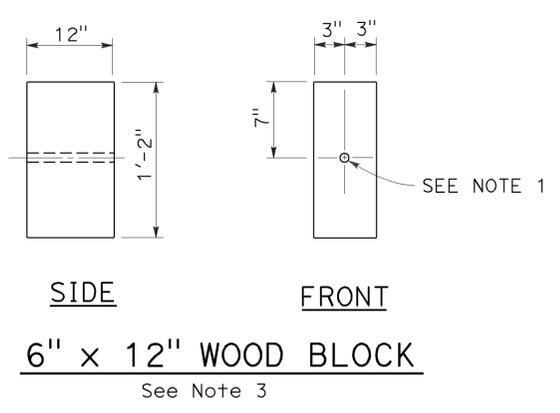

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
WOOD POST AND  
WOOD BLOCK DETAILS**

NO SCALE

RSP A77N1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N1**

2010 REVISED STANDARD PLAN RSP A77N1

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	214	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

November 15, 2013  
PLANS APPROVAL DATE



THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.




TO ACCOMPANY PLANS DATED 6-1-15

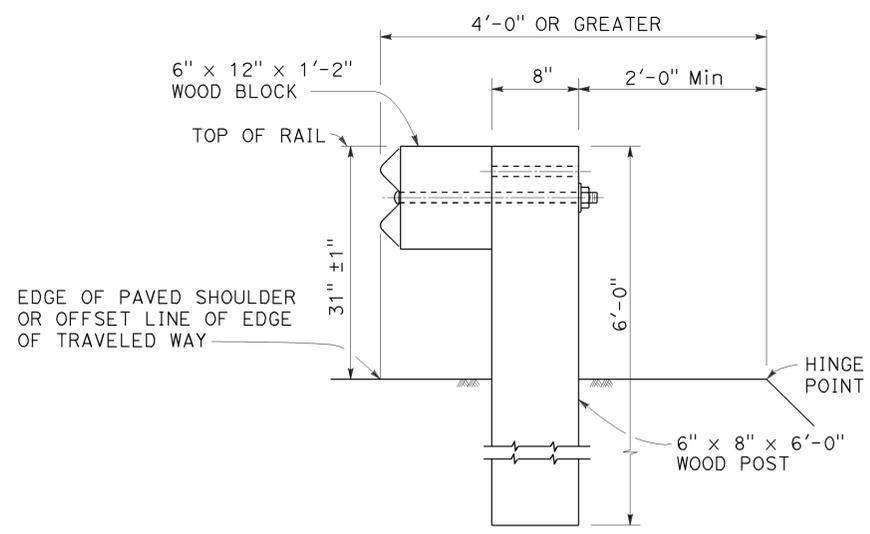

**DETAIL A**  
**TYPICAL ROADWAY**  
**INSTALLATION**  
See Note 1

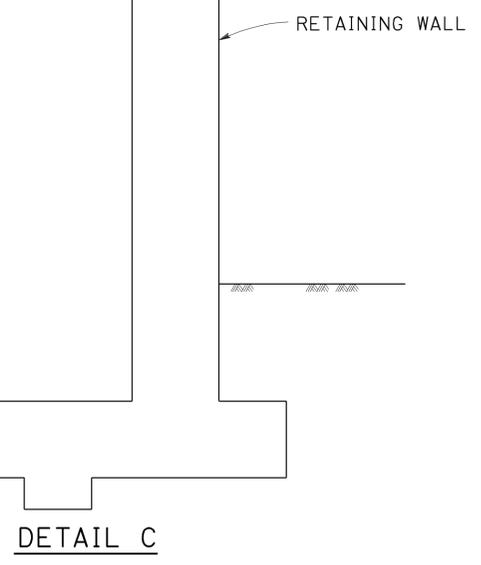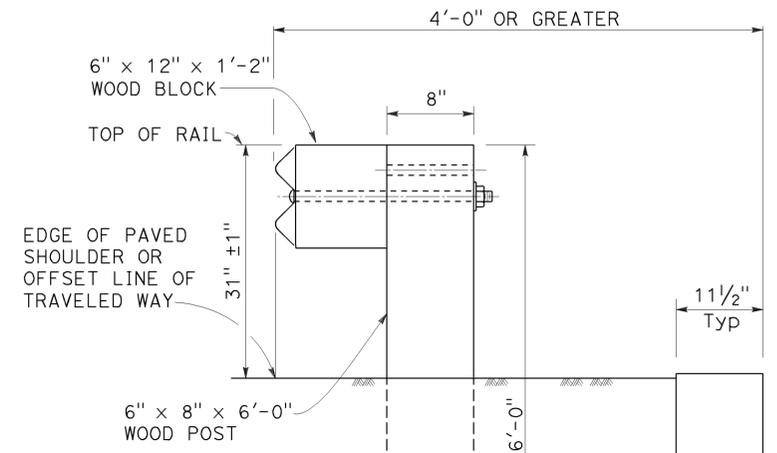

**DETAIL B**  
**NARROW ROADWAY**  
**INSTALLATION**  
See Note 1

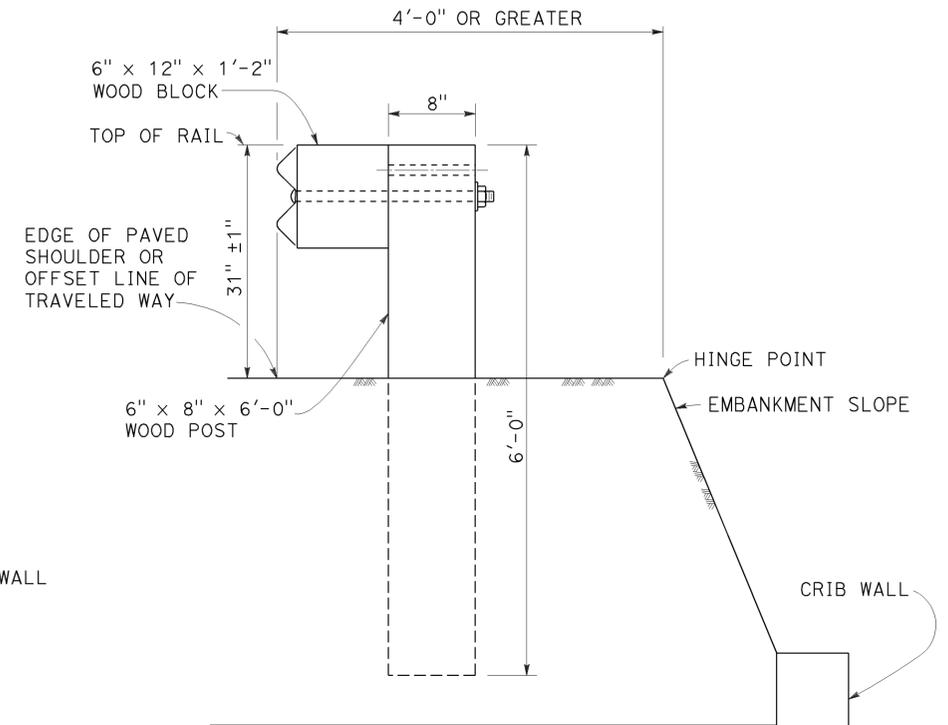

**DETAIL D**

**POST EMBEDMENT**

**INSTALLATION AT EARTH RETAINING WALLS**

**NOTES:**

1. These installation details also applicable to steel line post installations. For Detail A, C, and D, where steel line post installations are constructed, W6 x 8.5 or W6 x 9 steel post, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks are to be used in place of the size of wood post and wood block shown. For Detail B, where steel line post installations are constructed, W6 x 15 steel post, 8'-0" in length, with 8" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks are to be used in place of the size of wood post and wood block shown. For additional installation details, see Revised Standard Plan RSP A77L1 and RSP A77L2.
2. Where the distance between the face of the rail and the hinge point is less than 2'-6", see the Project Plans for special details.
3. For dike positioning with MGS installations, see Revised Standard Plan RSP A77N4.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM**  
**TYPICAL LINE POST**  
**EMBEDMENT AND**  
**HINGE POINT OFFSET DETAILS**

NO SCALE

RSP A77N3 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77N3  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N3**

2010 REVISED STANDARD PLAN RSP A77N3

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	215	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 6-1-15

**NOTES:**

- When necessary to place dike more than 7" in front of face of MGS, only Type C dike may be used. For dike details, see Revised Standard Plan RSP A87B.
- For standard railing post embedment, see Revised Standard Plan RSP A77N3.
- MGS delineation to be used where shown on the Project Plans.
- When dike or curb is placed under MGS, the maximum height of the dike or curb shall be 6". Mountable dike should not be used. For dike and curb details, see Revised Standard Plans RSP A87A and RSP A87B.
- For details of typical distance between the face of rail and hinge point, see Revised Standard Plan RSP A77N3.
- For steel line posts, use 1/4" - 20 self-tapping screws in 0.22" diameter holes or 1/4" bolts in 3/32" diameter holes.

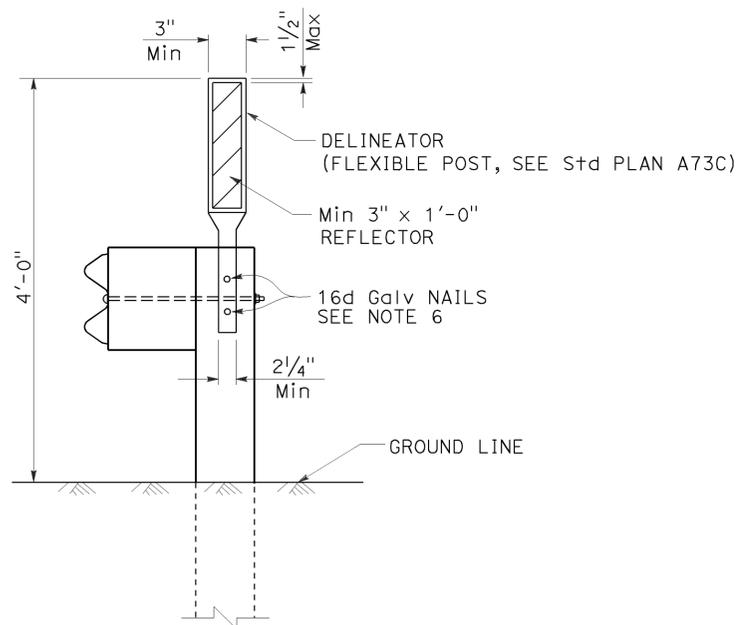

**MGS DELINEATION**  
See Note 3

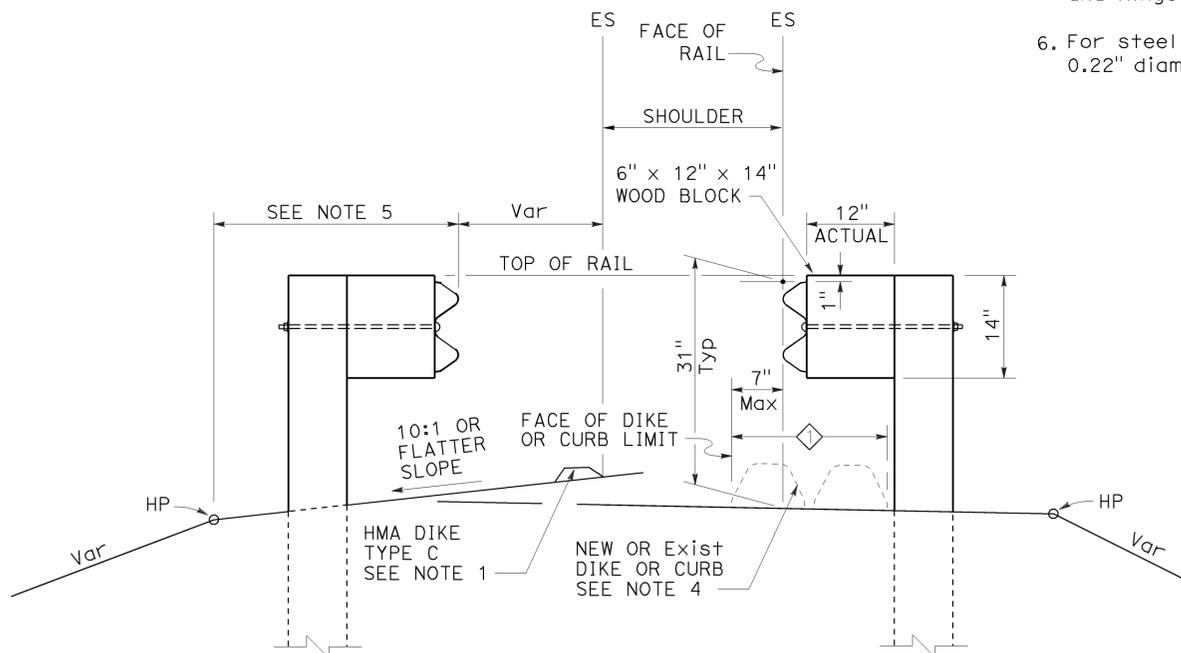

**DIKE POSITIONING**  
See Note 1

◇ PERMISSIBLE DIKE OR CURB PLACEMENT AREA

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL RAILING DELINEATION  
AND DIKE POSITIONING DETAILS**

NO SCALE

RSP A77N4 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N4**

2010 REVISED STANDARD PLAN RSP A77N4

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	216	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 6-1-15

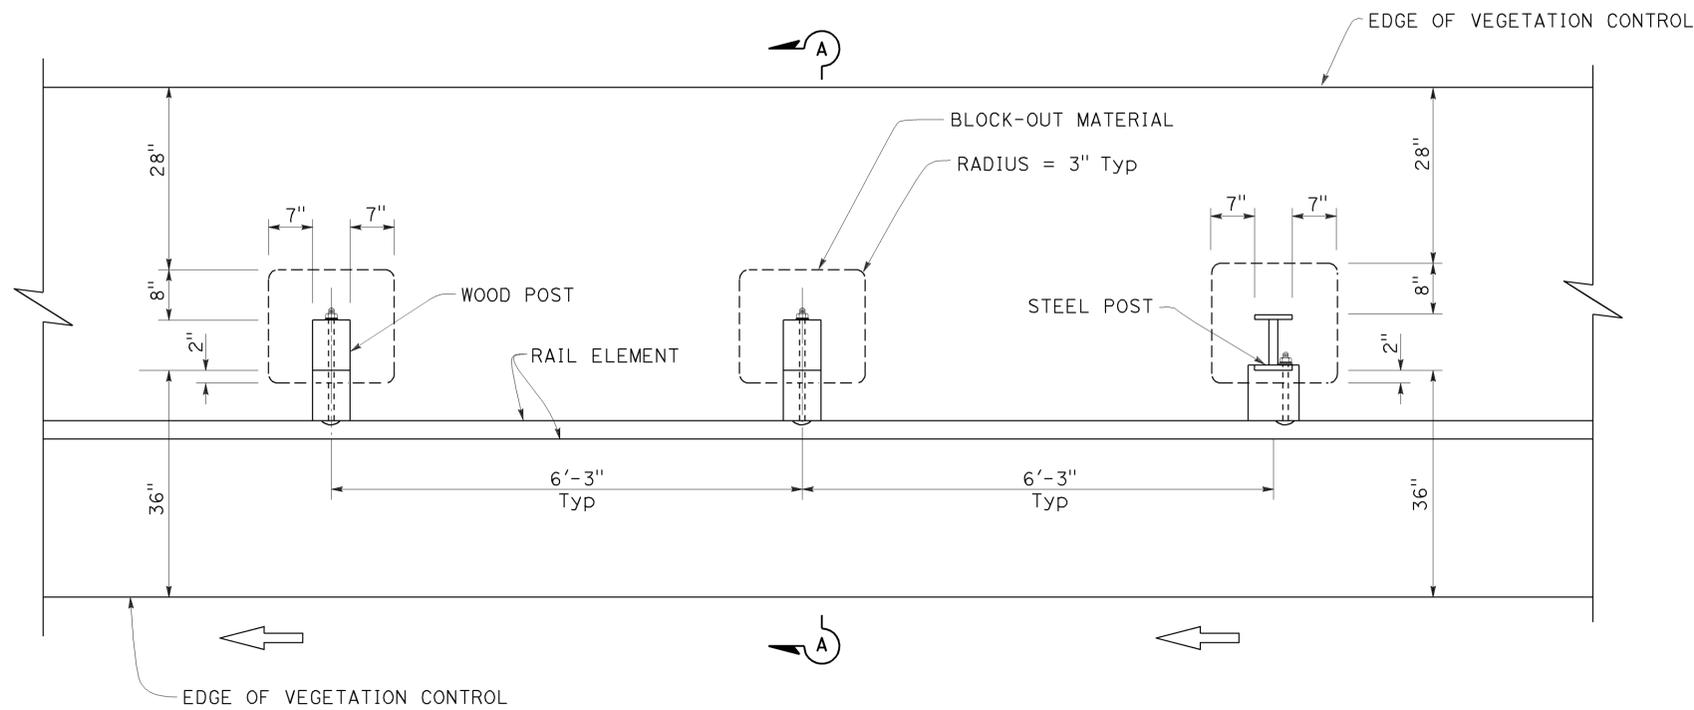

PLAN

NOTES:

1. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
3. For wood post sizes, see Revised Standard Plan RSP A77N1.
4. For steel post sizes, see Revised Standard Plan RSP A77N2.
5. For details not shown, see Revised Standard Plans RSP A77L1 and RSP A77L2.

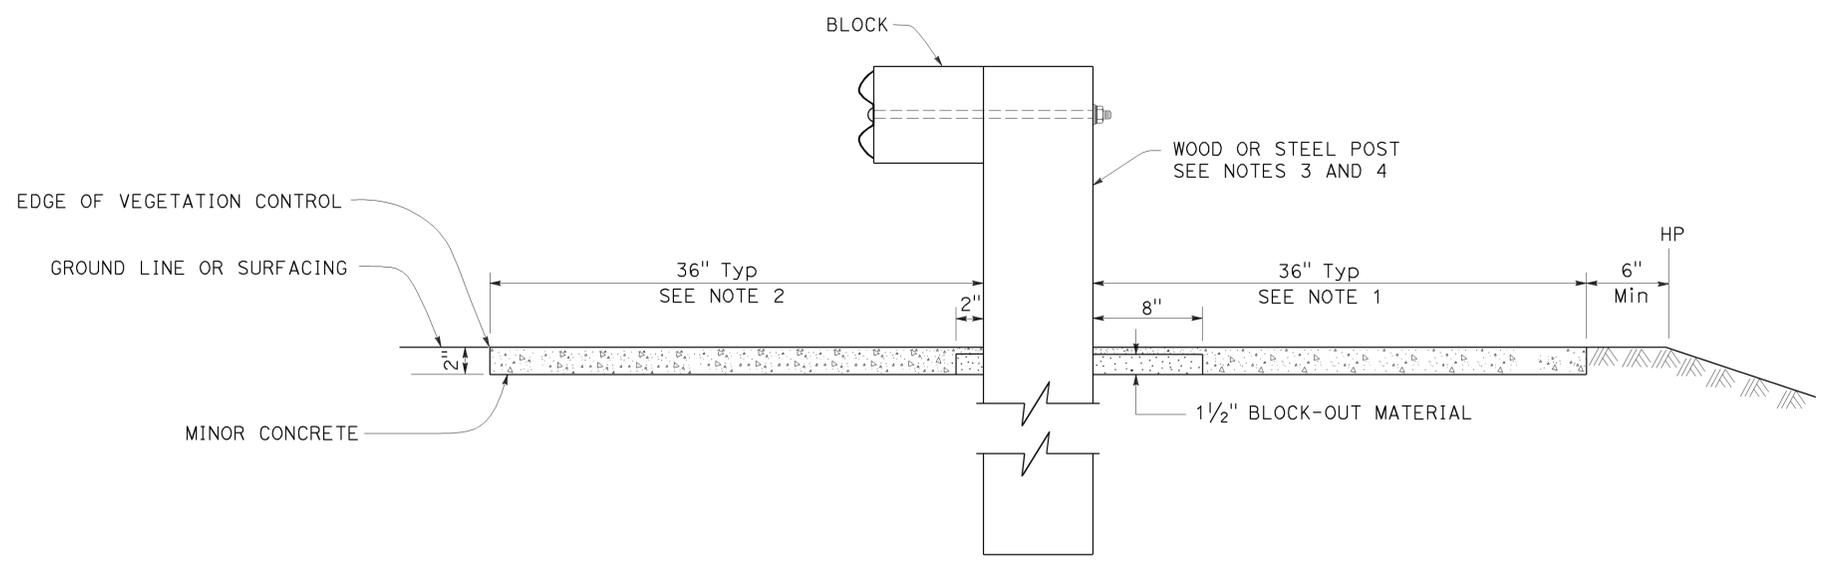

SECTION A-A

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
STANDARD RAILING SECTION**

NO SCALE

RSP A77N5 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N5**

2010 REVISED STANDARD PLAN RSP A77N5

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	217	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 6-1-15

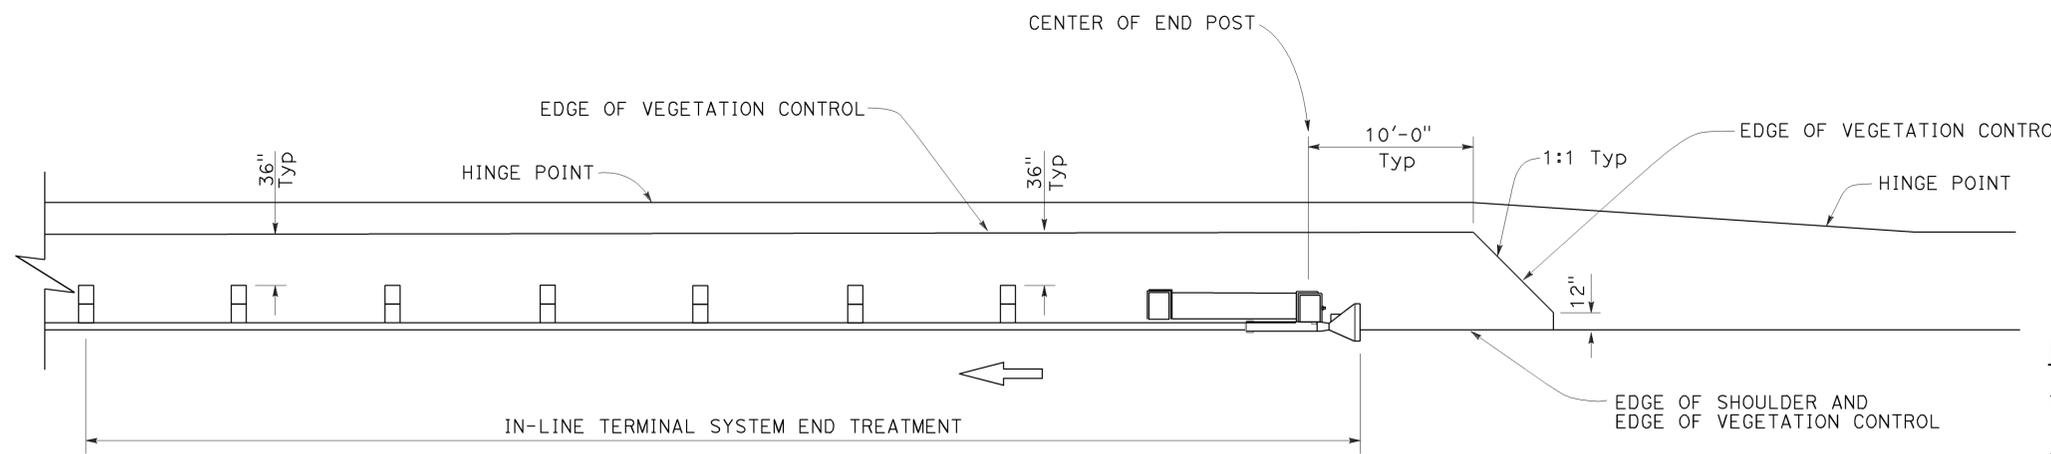


PLAN

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

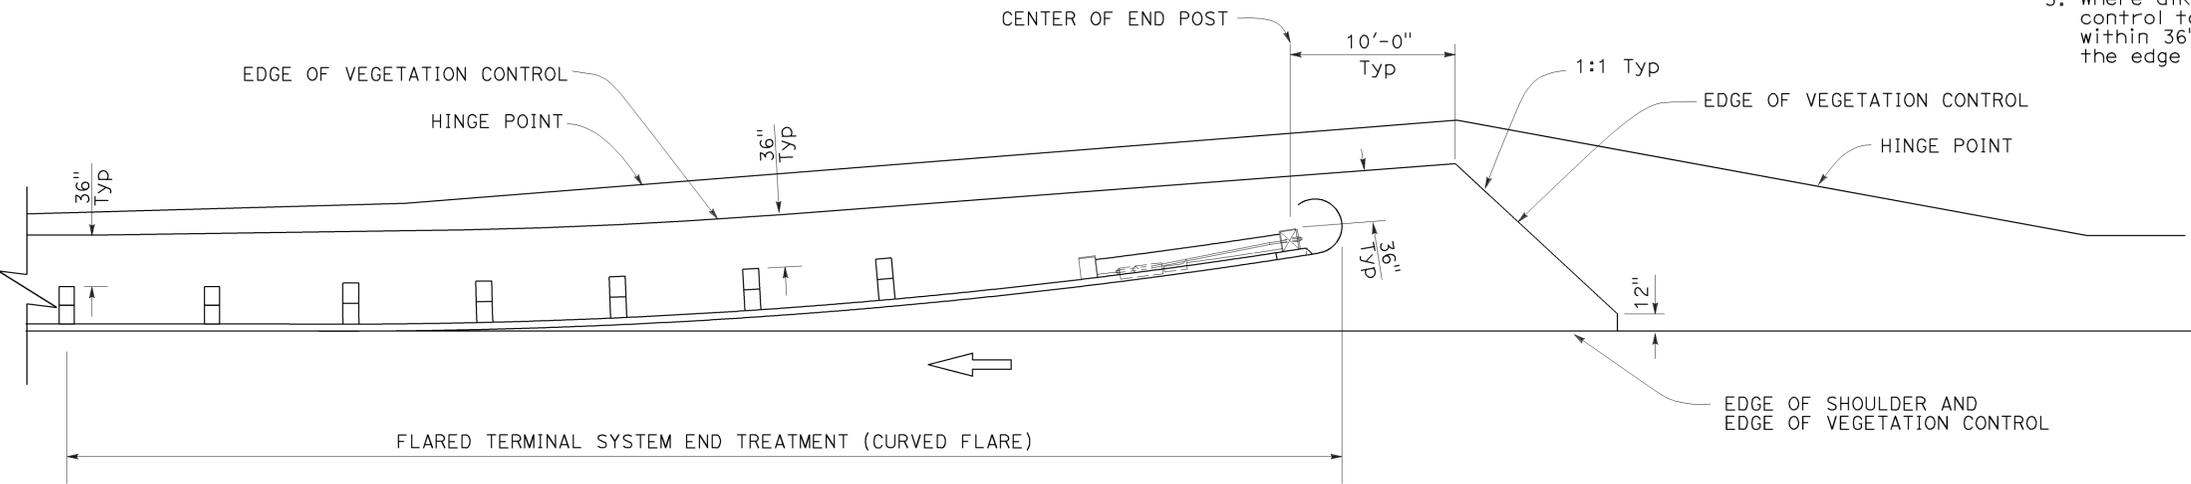

PLAN

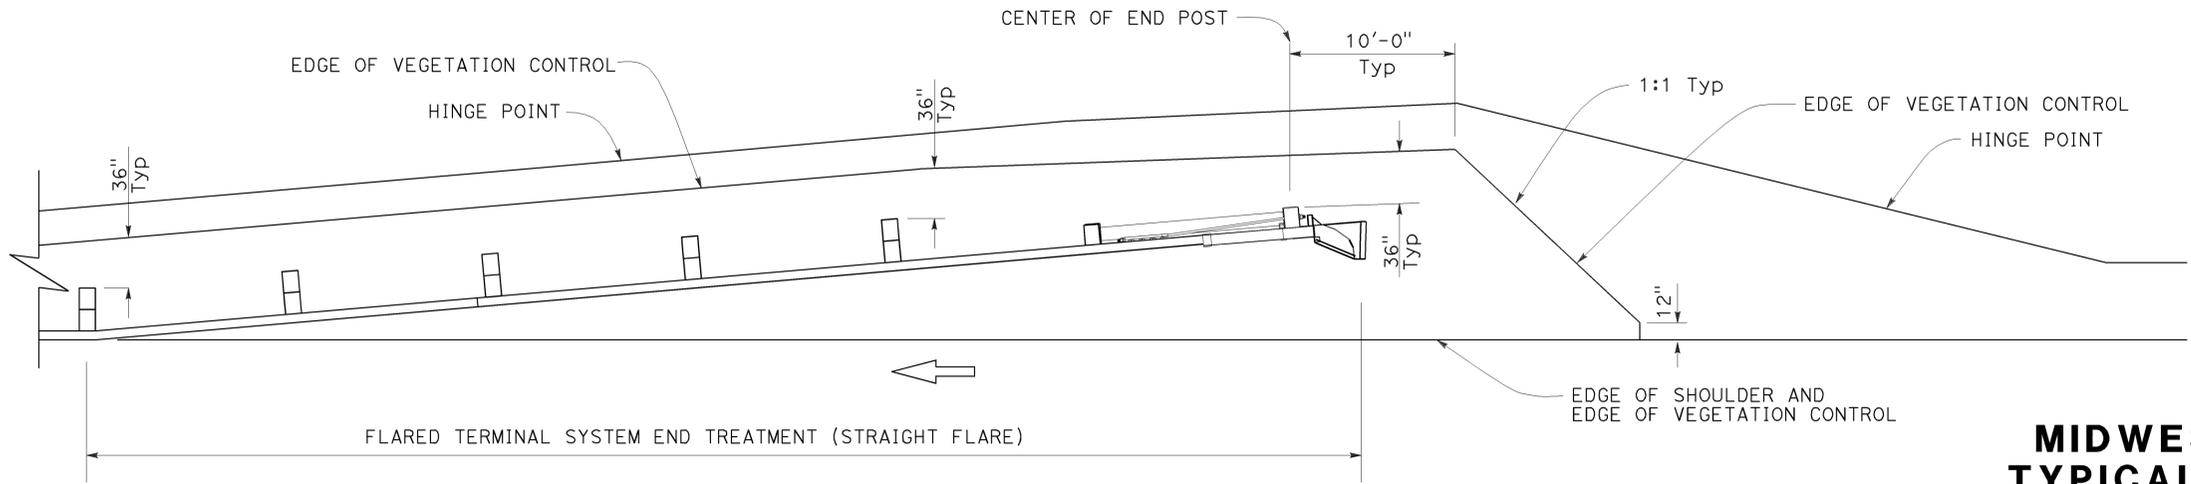

PLAN

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
FOR TERMINAL SYSTEM END TREATMENTS**

NO SCALE

RSP A77N6 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N6**

2010 REVISED STANDARD PLAN RSP A77N6

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	218	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER



July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15


REGISTERED PROFESSIONAL ENGINEER  
 Randell D. Hiatt  
 No. C50200  
 Exp. 6-30-15  
 CIVIL  
 STATE OF CALIFORNIA

2010 REVISED STANDARD PLAN RSP A77N7

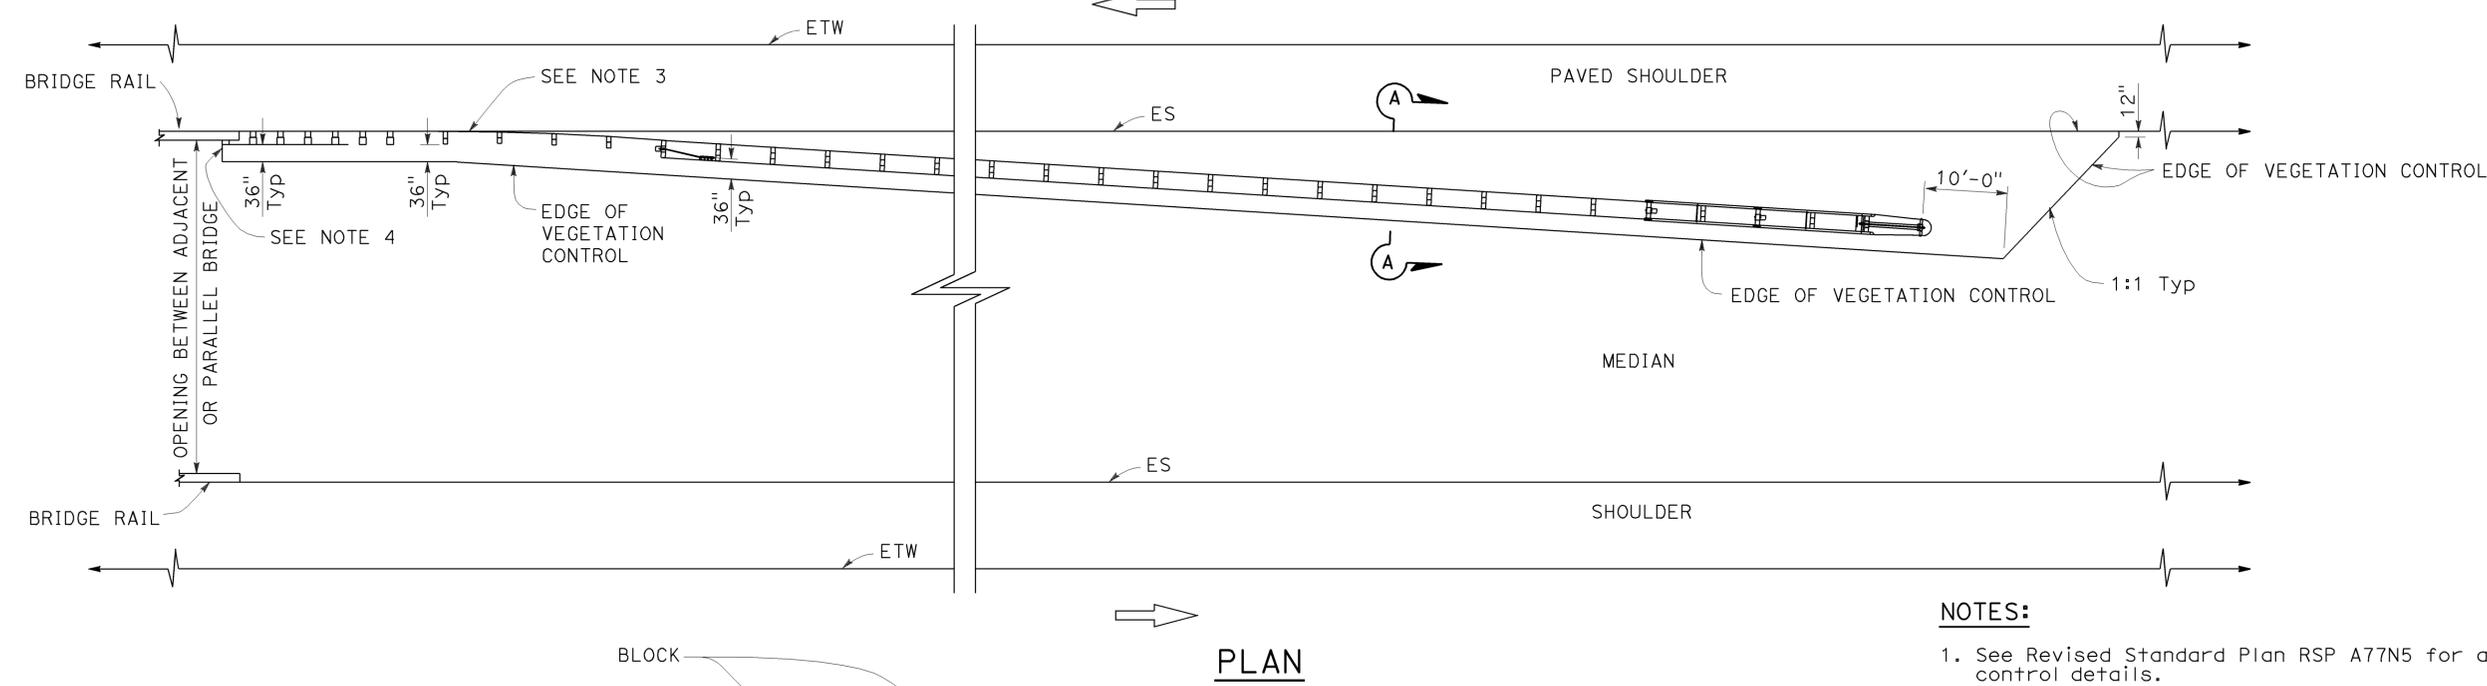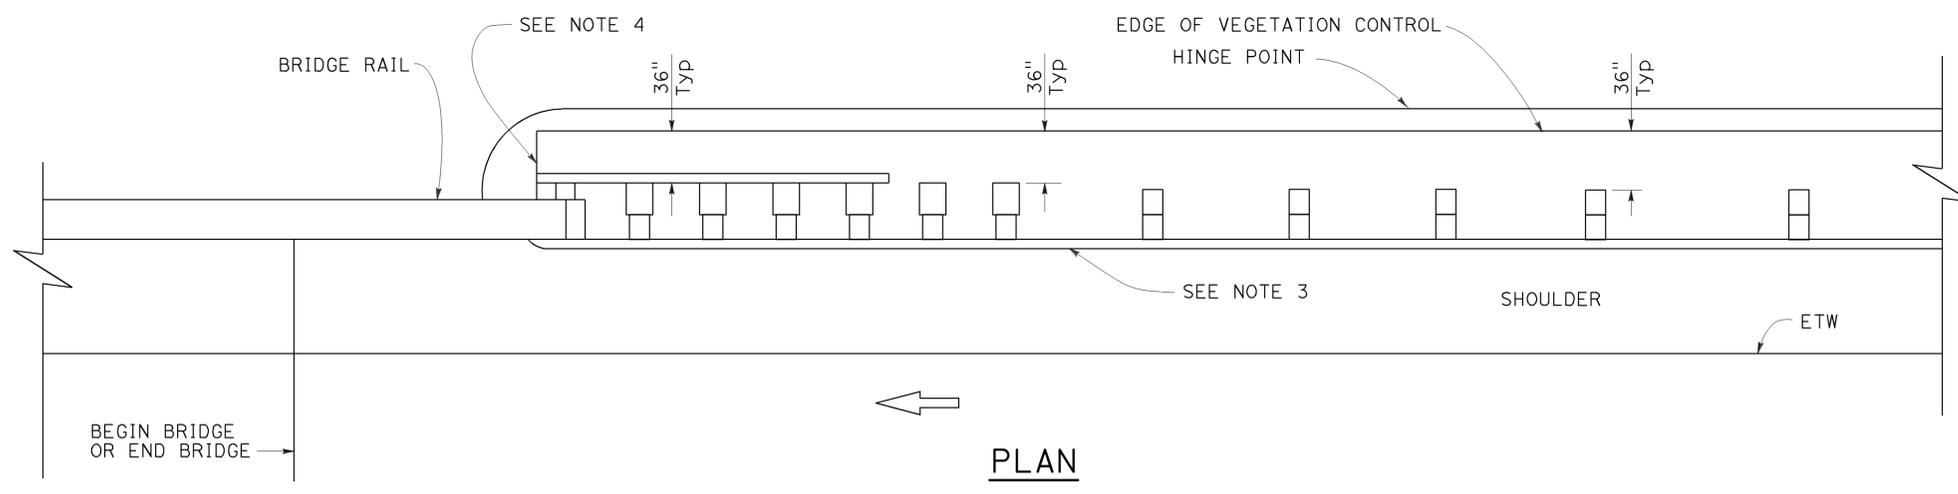

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
4. End vegetation control at end of backside rail element.

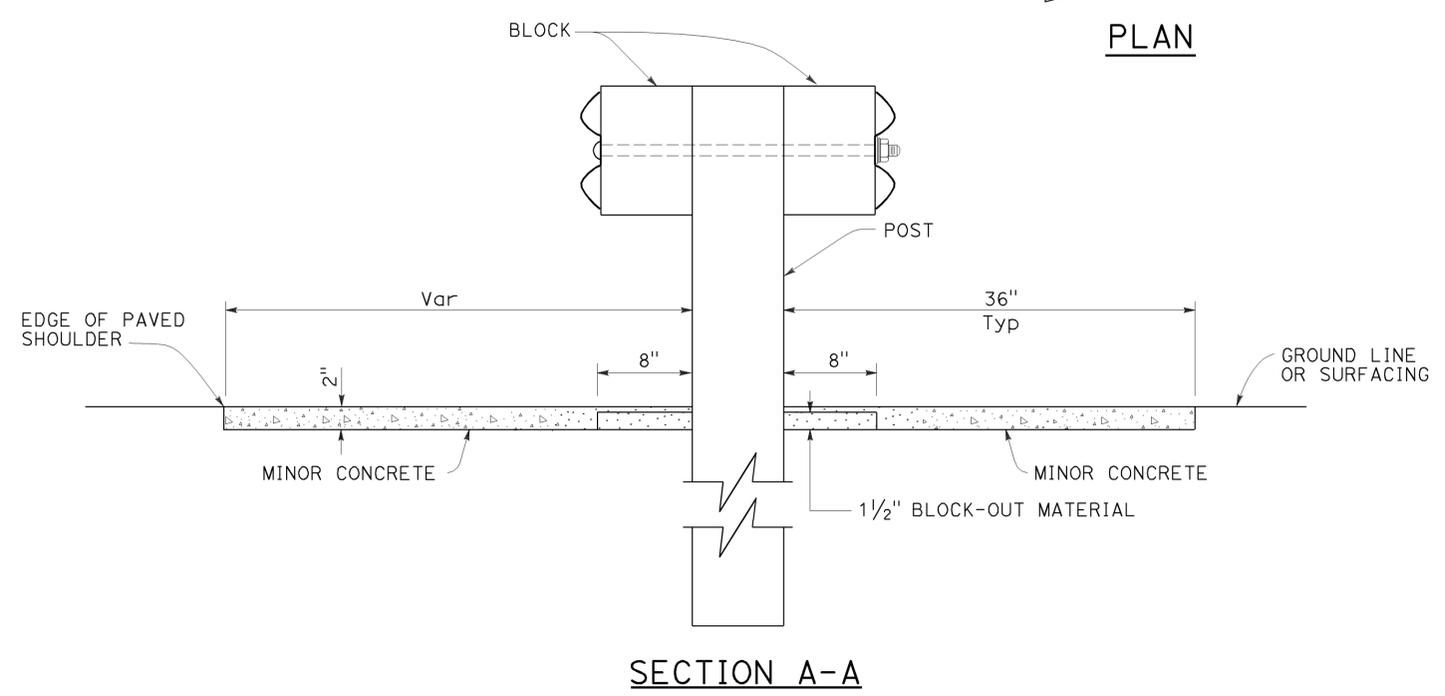

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT STRUCTURE APPROACH**

NO SCALE

RSP A77N7 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.


**REVISED STANDARD PLAN RSP A77N7**

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	219	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 6-1-15

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

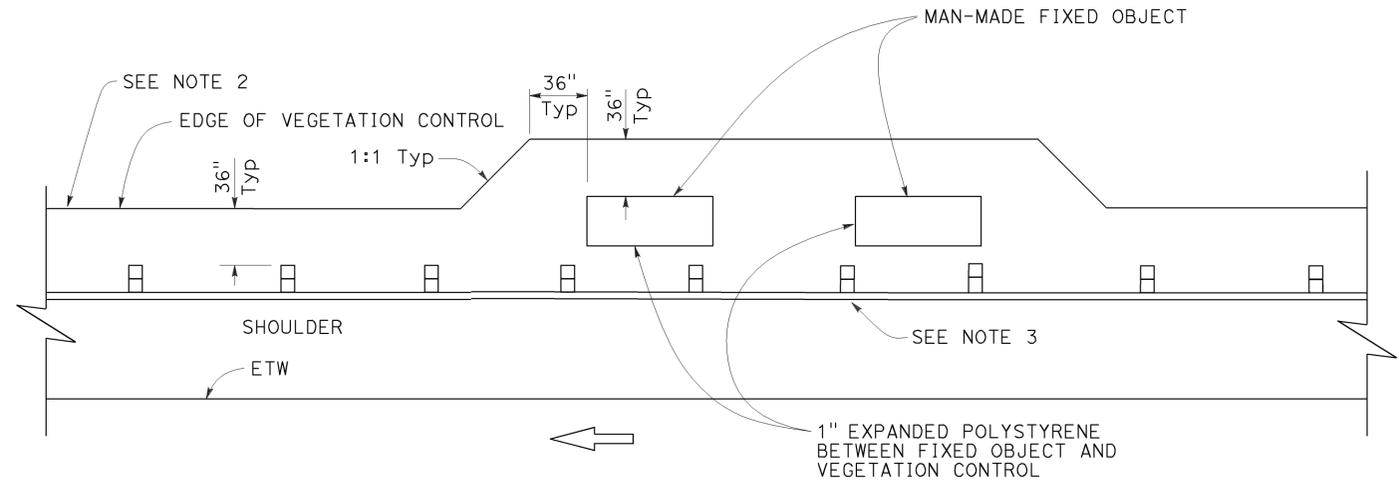

**PLAN**  
Fixed object(s) on shoulder

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE

RSP A77N8 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N8**

2010 REVISED STANDARD PLAN RSP A77N8

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	220	265


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

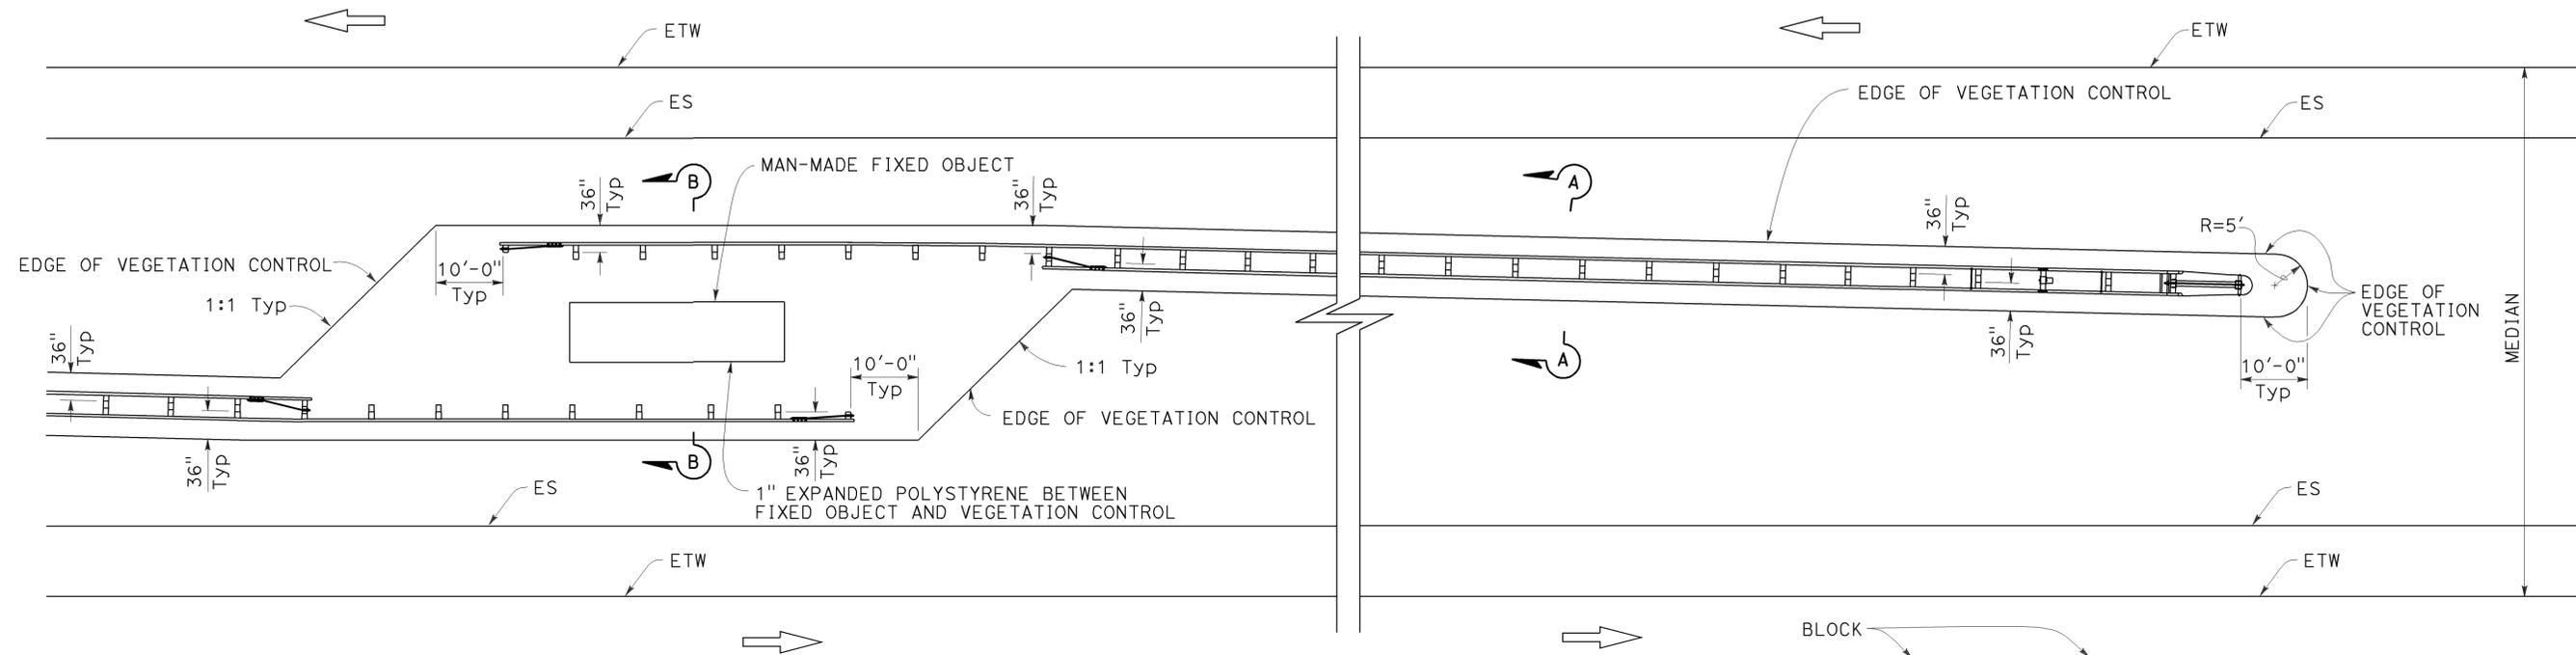


**PLAN**

Fixed object(s) in median

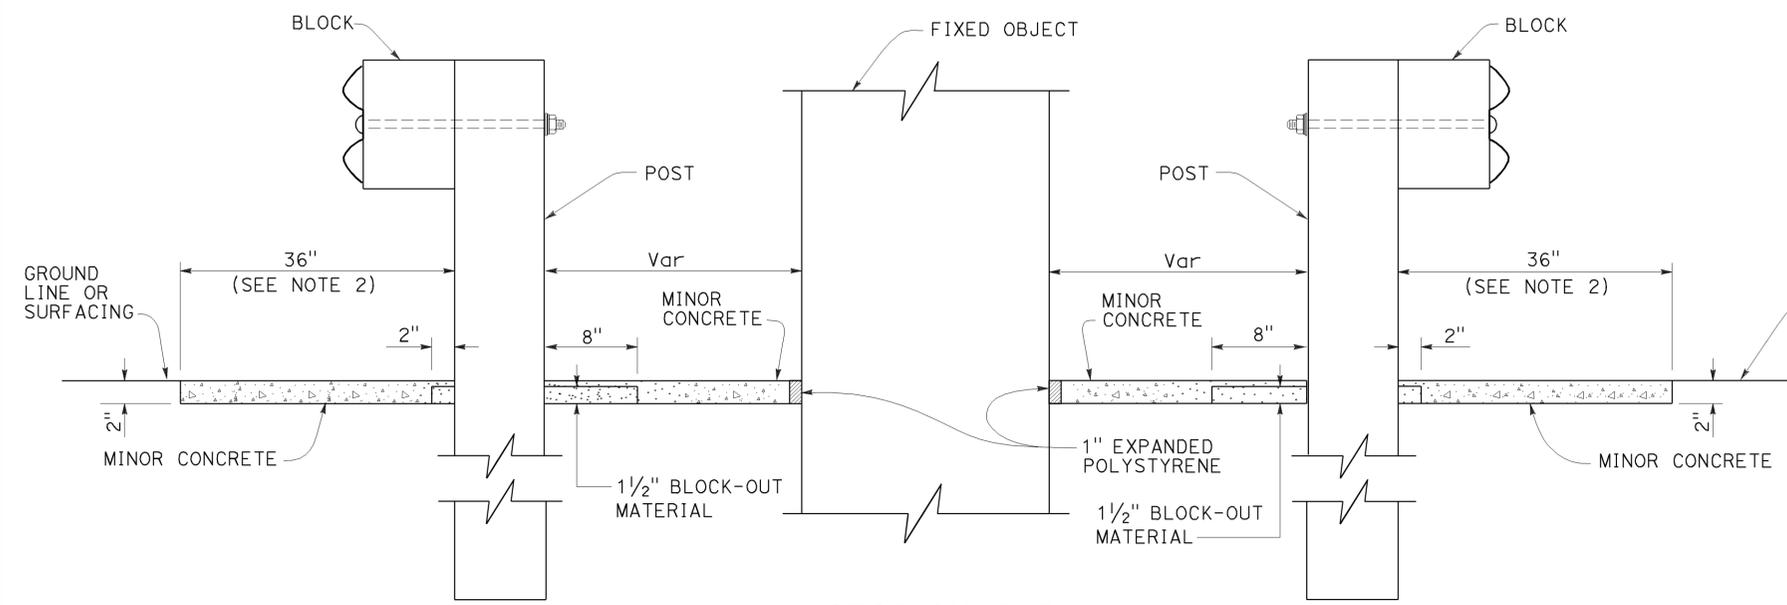

**SECTION B-B**

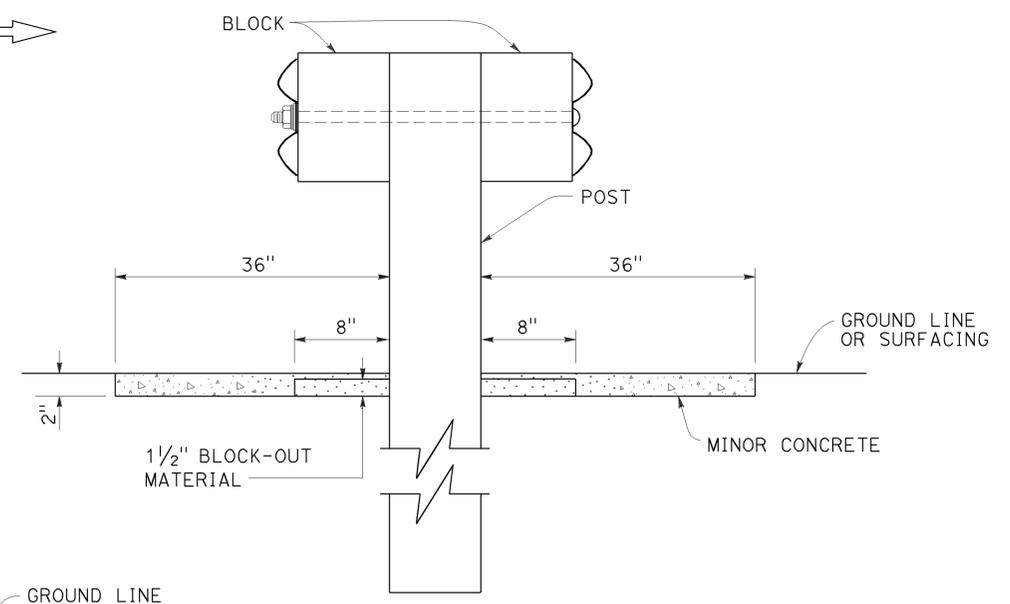

**SECTION A-A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE

RSP A77N9 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N9**

2010 REVISED STANDARD PLAN RSP A77N9

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	221	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

**NOTES:**


1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

TO ACCOMPANY PLANS DATED 6-1-15

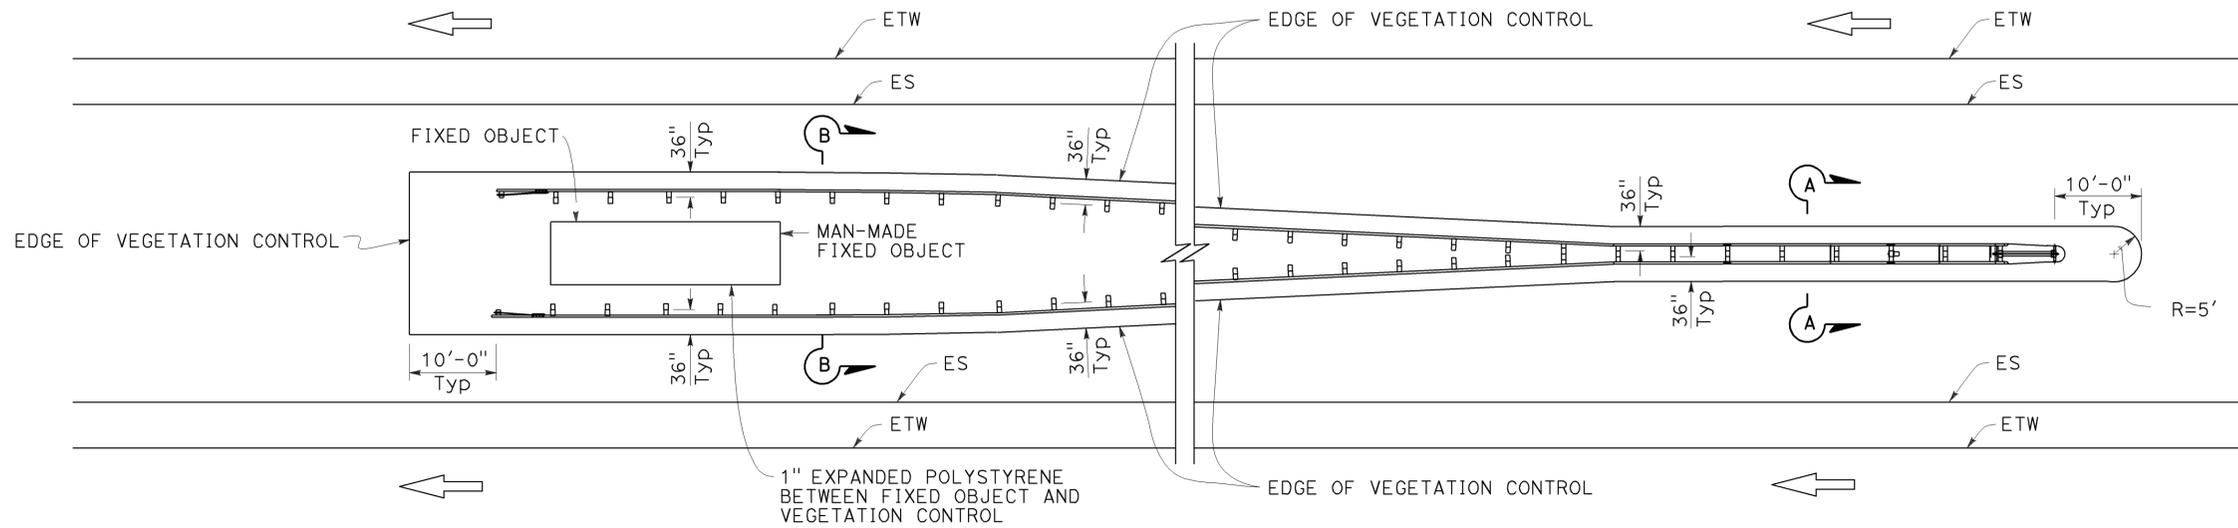


**PLAN**

Fixed object(s) between separate roadbeds  
(One-Way Traffic)

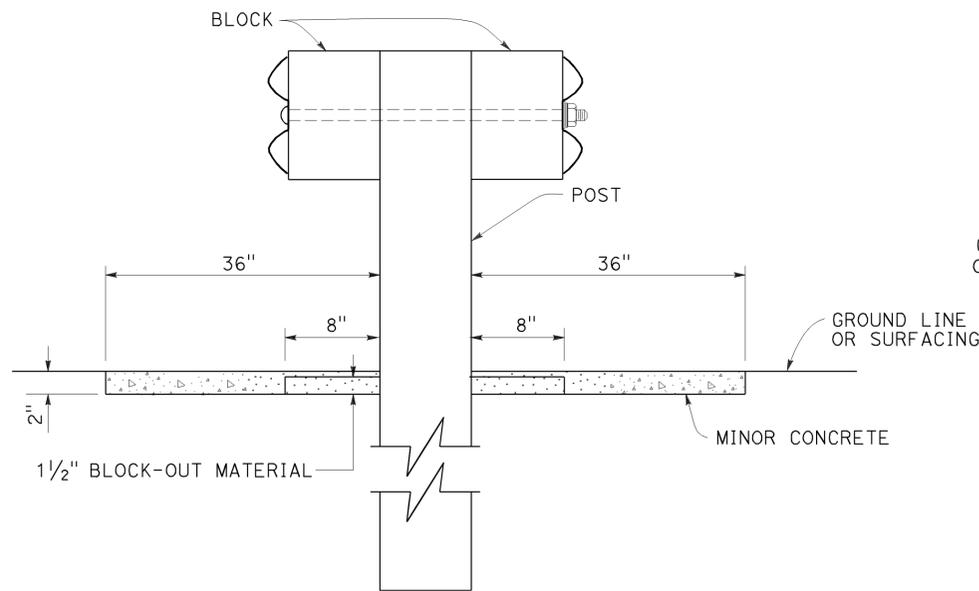

**SECTION A-A**

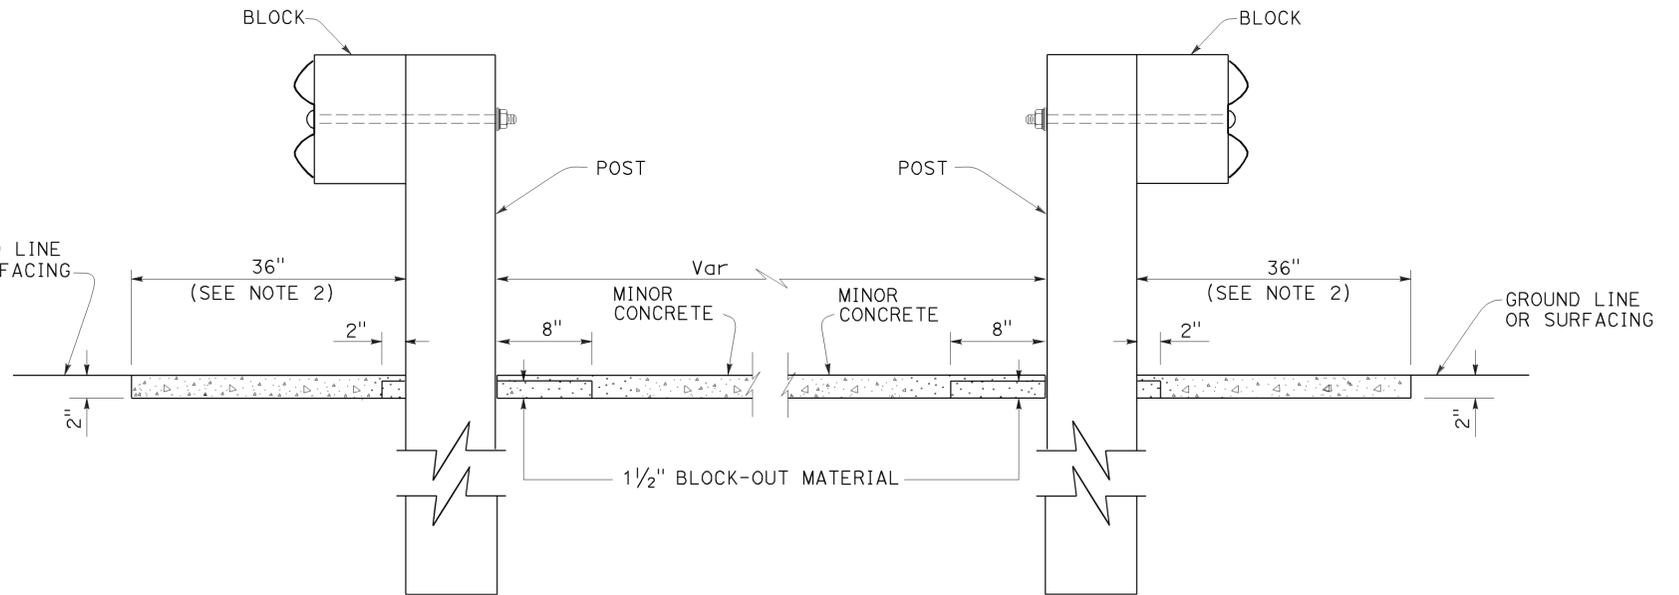

**SECTION B-B**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE

RSP A77N10 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N10**


2010 REVISED STANDARD PLAN RSP A77N10

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	222	265

Randell D. Hiatt  
REGISTERED CIVIL ENGINEER


July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.




TO ACCOMPANY PLANS DATED 6-1-15

2010 REVISED STANDARD PLAN RSP A77Q1

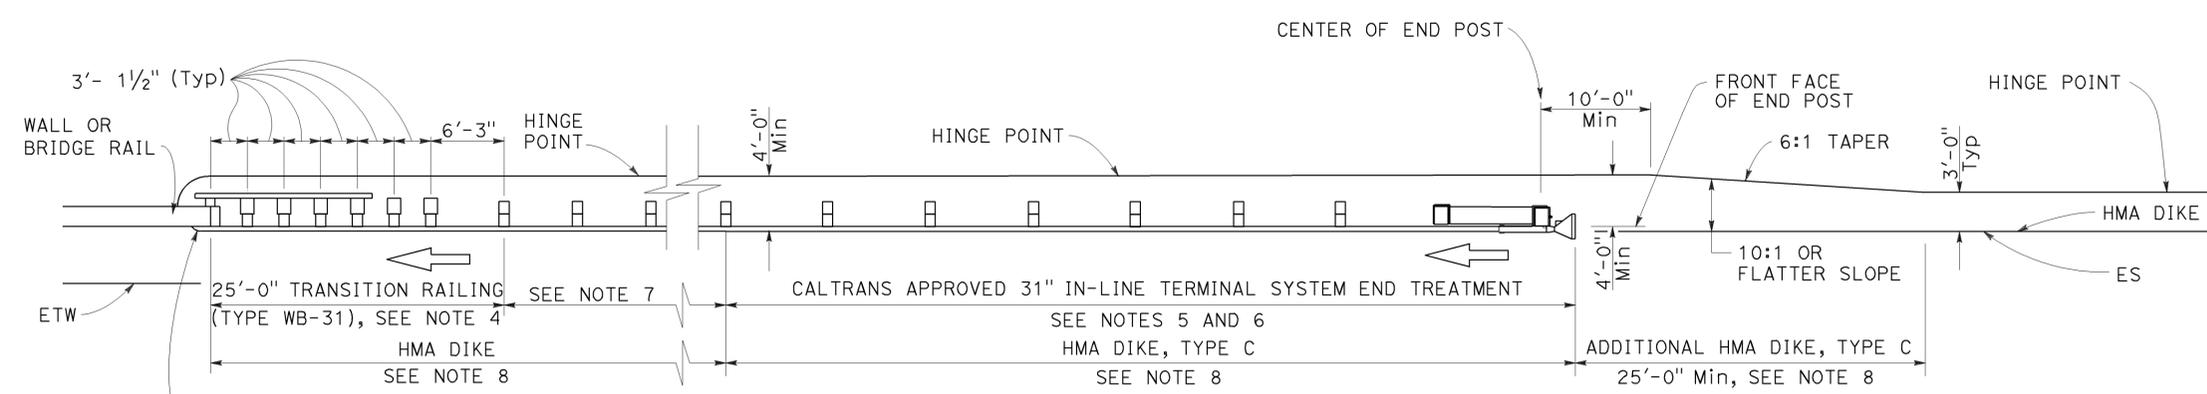

**TYPE 12A LAYOUT**

(MGS installation at structure approach with 31" in-line end treatment at traffic approach end of railing)  
See Notes 9

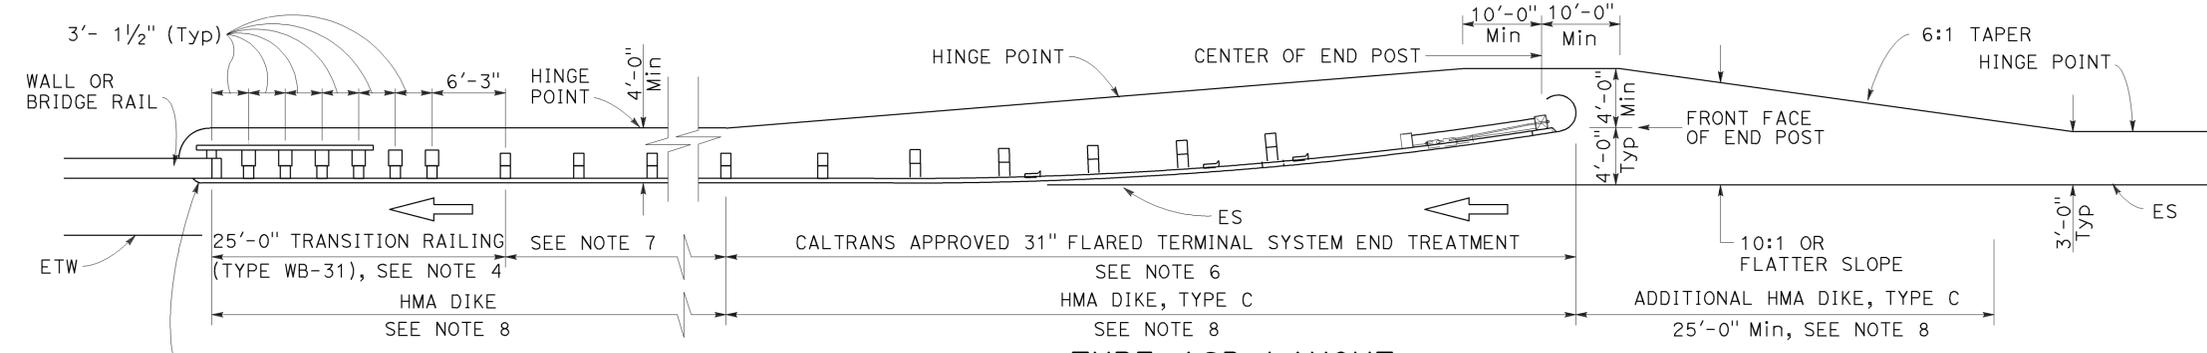

**TYPE 12B LAYOUT**

(MGS installation at structure approach with 31" Flared end treatment at traffic approach end of railing)  
See Notes 9

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or plastic blocks may be used for 6" x 8" x 6'-0" wood posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- For Transition Railing (Type WB-31) details for Types 12A and 12B Layouts, see Revised Standard Plan RSP A77U4.
- 31" in-line terminal system end treatments are used where site conditions will not accommodate a 31" flared end treatment.
- The type 31" of terminal system end treatment to be used will be shown on the Project Plans.
- Dependent on site conditions (embankment height, side slopes, or other fixed objects), it may be advisable to construct additional guard railing (a length equal to multiples of 12'-6" with 6'-3" post spacing) between the transition railing and end treatment. A 12.5 degree angle of departure can be drawn on the Project Plans from the edge of traveled way through the outer most point of the fixed object to determine the additional length of railing needed.
- Where placement of dike is required with guard railing installations, see Revised Standard Plan RSP A77N4 for dike positioning details.
- Type 12A or Type 12B Layouts are typically used:
  - To the right of approaching traffic, at the end of a structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the left of approaching traffic, at the end of a structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the right of approaching traffic at the end of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
  - To the right of approaching traffic at the end of the structure on multilane freeways or expressways with decked median on the bridge.
- See Revised Standard Plan RSP A77Q3 for typical layout used left of approaching traffic at the ends of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
- For additional details of typical connections to bridge rail, see Connection Detail AA on Revised Standard Plans RSP A77U1 and RSP A77U2 and Connection Detail FF on Revised Standard Plans RSP A77V1 and RSP A77V2.
- For additional details of a typical connection to walls or abutments, see Revised Standard Plan RSP A77U3.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
STRUCTURE APPROACH**

NO SCALE

RSP A77Q1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77Q1**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	223	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

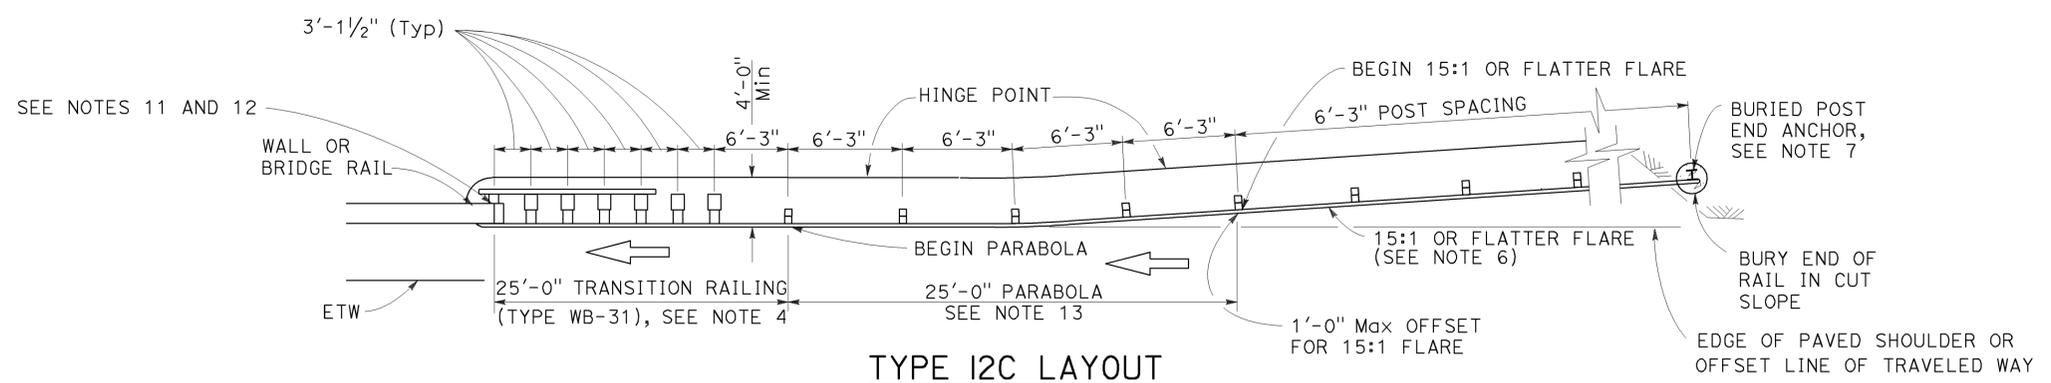


**TYPE 12C LAYOUT**

(MGS installation at structure approach with a Buried end anchor treatment at traffic approach end of railing)  
See Notes 8 and 9

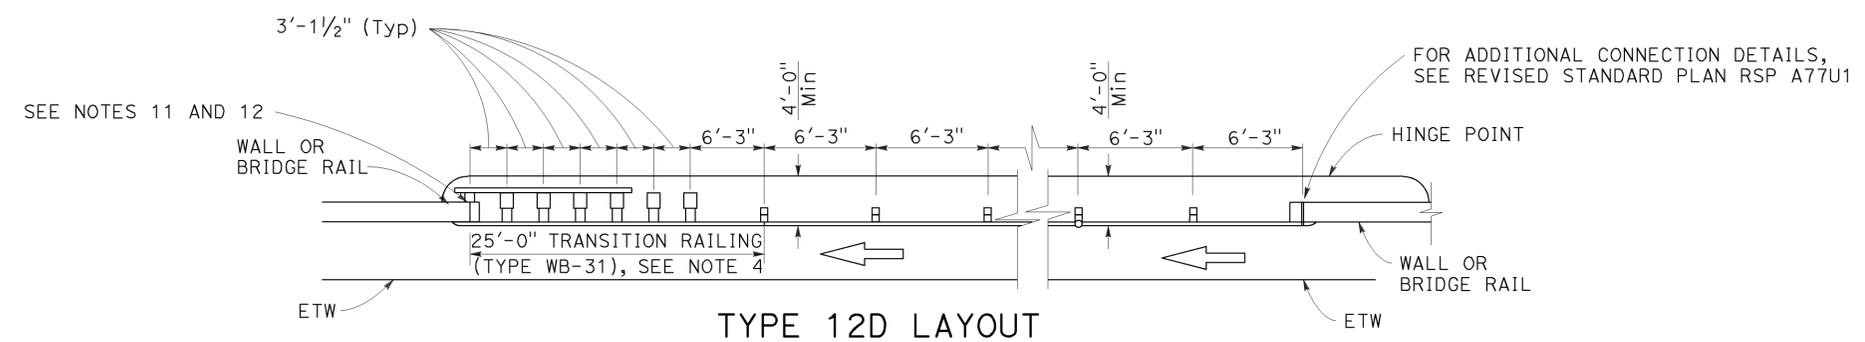

**TYPE 12D LAYOUT**

(Continuous MGS installation between structures)  
See Notes 5 and 9

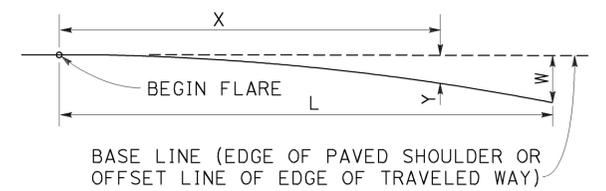


BASE LINE (EDGE OF PAVED SHOULDER OR OFFSET LINE OF EDGE OF TRAVELED WAY)

$$Y = \frac{WX^2}{L^2}$$

Y = OFFSET FROM BASE LINE  
W = MAXIMUM OFFSET  
X = DISTANCE ALONG BASE LINE  
L = LENGTH OF FLARE

**PARABOLIC FLARE OFFSETS**

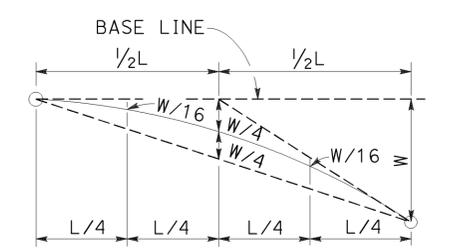

**TYPICAL PARABOLIC LAYOUT**

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" m wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or plastic blocks may be used for 6" x 8" x 6'-0" wood posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- For Transition Railing (Type WB-31) details for Types 12C and 12D Layouts, see Revised Standard Plan RSP A77U4.
- Type 12D layout is typically used where continuous MGS is recommended between structures.
- The 15:1 or flatter flare for Type 12C Layout is based on the edge of the paved shoulder or offset line of edge of the traveled way. The length of MGS with the 15:1 or flatter flare is based on site conditions and should be a length equal to multiples of 12'-6".
- For details of the buried post end anchor used with Type 12C Layout, see Revised Standard Plan RSP A77T2.
- Where placement of dike is required with MGS installations, see Revised Standard Plan RSP A77N4 for dike positioning details.
- Type 12C Layout is typically used:
  - To the right of approaching traffic, at the end of the structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the left of approaching traffic, at each of a structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the right of approaching traffic at the end of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
  - To the right of approaching traffic at the end of the structure on multilane freeways or expressways with decked median on the bridge.
- See Revised Standard Plan RSP A77Q3 for typical layout used left of approaching traffic at the ends of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
- For additional details of typical connections to bridge rail, see Connection Detail AA on Revised Standard Plans RSP A77U1 and RSP A77U2 and Connection Detail FF on Revised Standard Plans RSP A77V1 and RSP A77V2.
- For additional details of a typical connection to walls or abutments, see Revised Standard Plan RSP A77U3.
- For typical flare offsets for 25'-0" length parabola with maximum offset of 1'-0", see Revised Standard Plan RSP A77P1.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
STRUCTURE APPROACH  
AND BETWEEN STRUCTURES**

NO SCALE

RSP A77Q2 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77Q2**

2010 REVISED STANDARD PLAN RSP A77Q2


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	224	265

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER


July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


NO. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

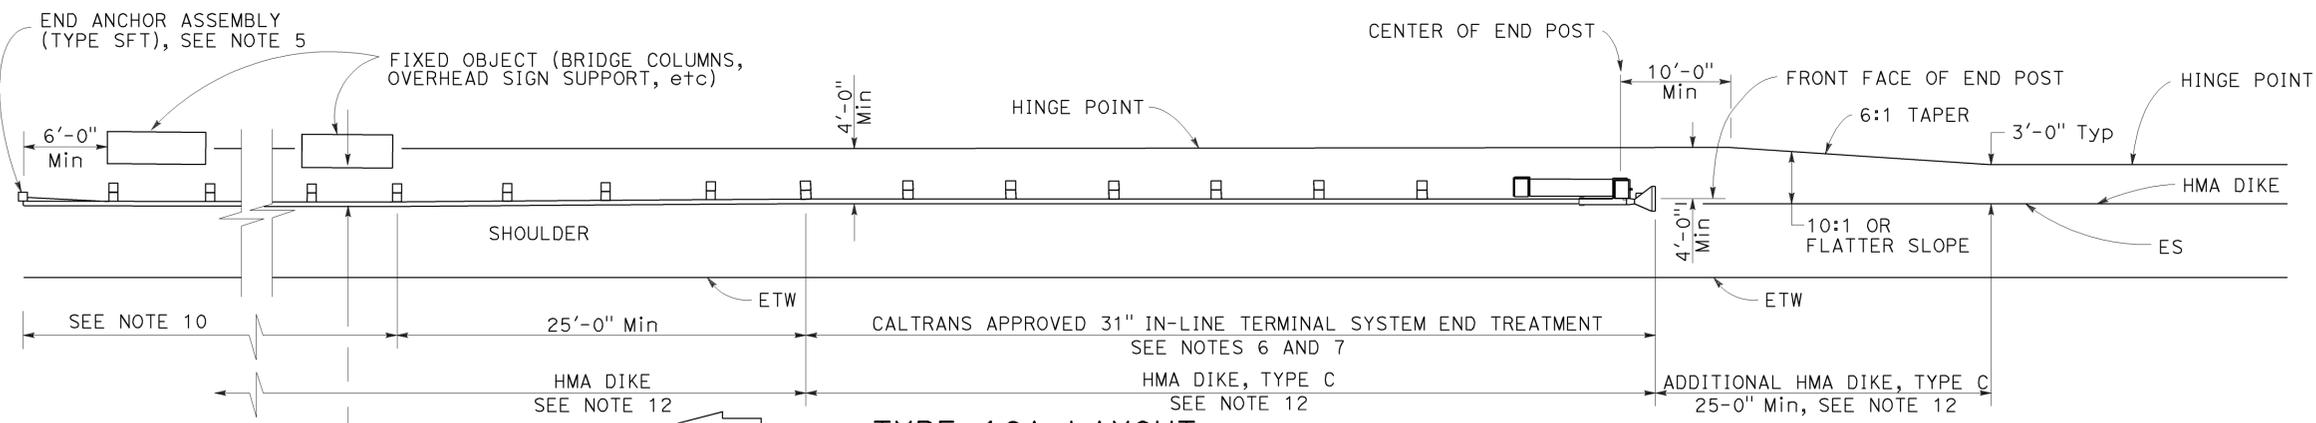


**TYPE 16A LAYOUT**

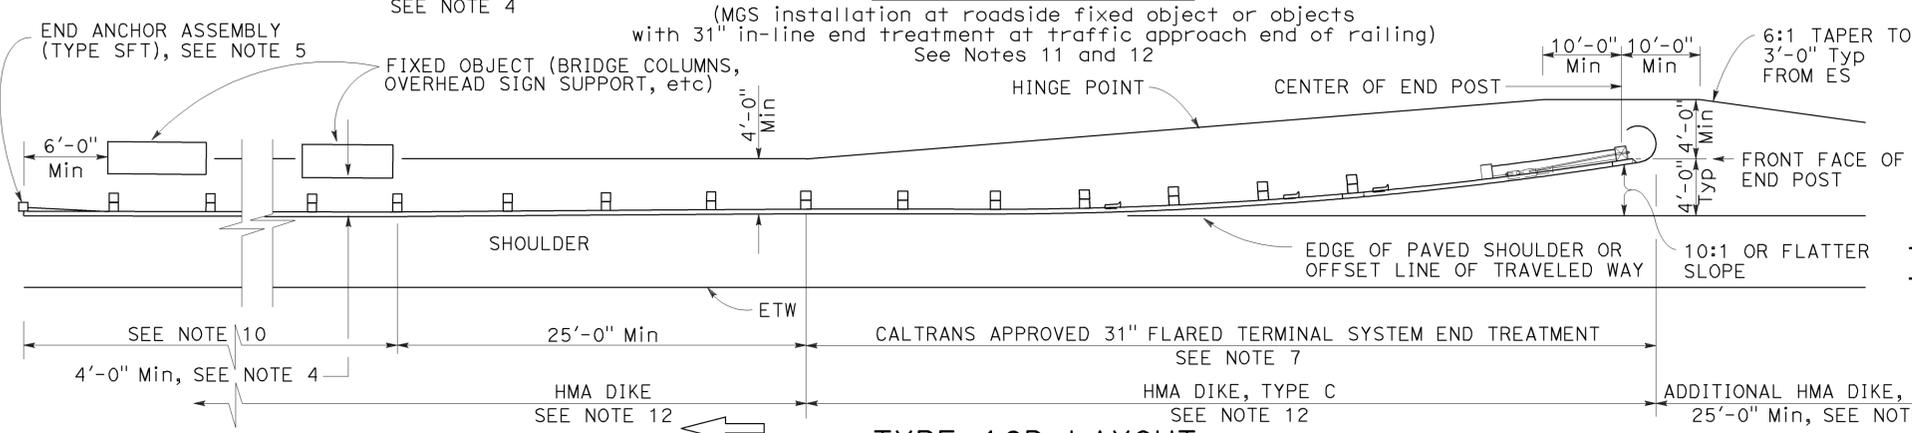


**TYPE 16B LAYOUT**

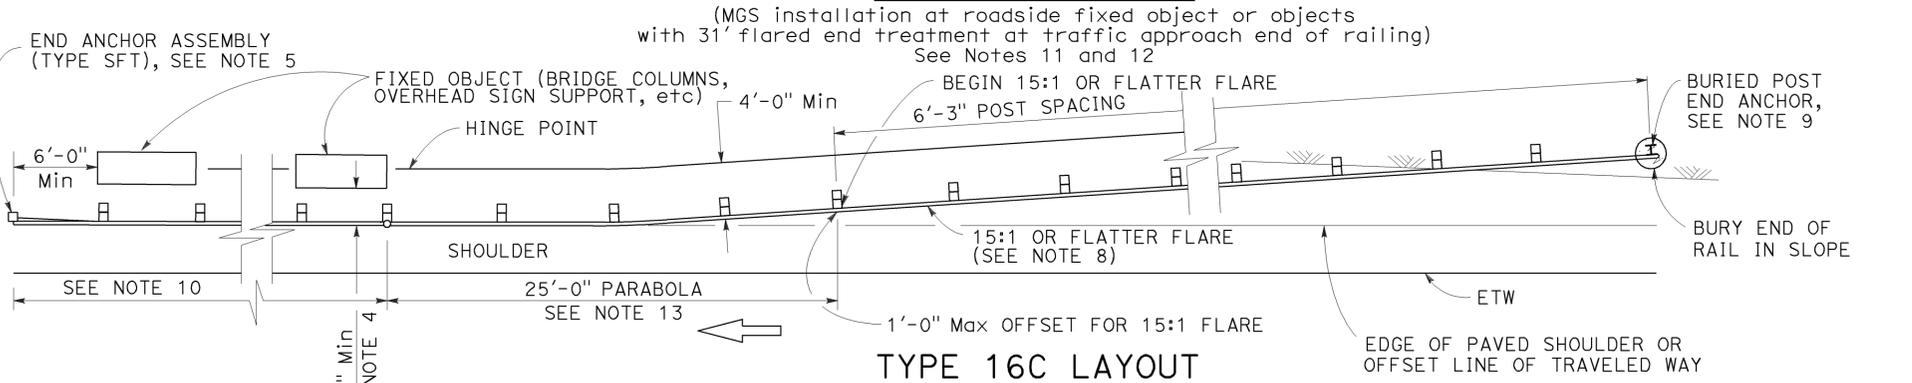


**TYPE 16C LAYOUT**

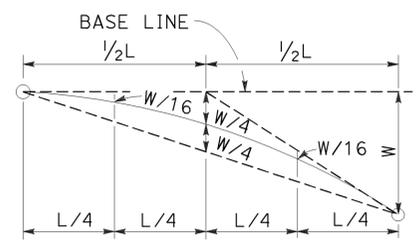

**TYPICAL PARABOLIC LAYOUT**

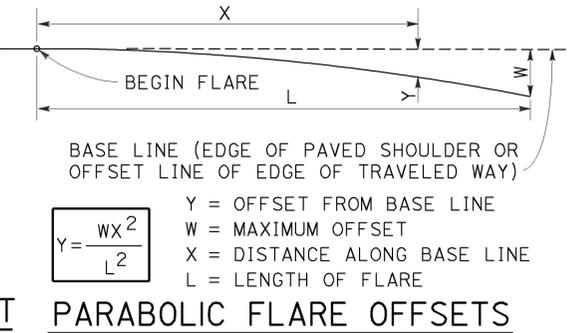

**PARABOLIC FLARE OFFSETS**

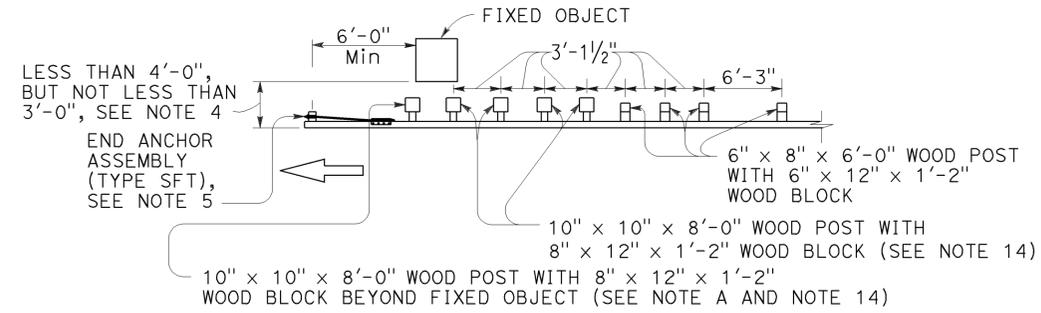

**NOTE A:** For a series of fixed objects (bridge columns, overhead sign supports, etc.) additional 10" x 10" x 8'-0" wood post with 8" x 12" x 1'-2" wood blocks at 3'-1/2" center to center spacing are to be used between fixed objects.

**STRENGTHENED MIDWEST GUARDRAIL SYSTEM SECTIONS FOR FIXED OBJECT**

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks may be used for 6" x 8" x 6'-0" wood line posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- A 4'-0" minimum clearance is required between the face of the railing and the face of a fixed object located directly behind MGS sections with post spacing of 6'-3". Construct MGS as shown in the detail "Strengthened Midwest Guardrail System Sections for Fixed Object" on this plan, where the clearance between the face of the railing and the face of a fixed object is less than 4'-0", but not less than 3'-0". Where the clearance is less than 3'-0", a concrete wall or barrier should be constructed to shield the fixed object(s).
- For End Anchor Assembly (Type SFT) details, see Revised Standard Plan RSP A77S1.
- 31" in-line terminal system end treatments are used where site conditions will not accommodate a 31" flared end treatment.
- The type of 31" terminal system to be used will be shown on the Project Plans.
- The 15:1 or flatter flare used with Type 16C Layout is based on the edge of the paved shoulder or offset line of edge of the traveled way. The length of MGS within the 15:1 or flatter flare is based on site conditions and should be a length equal to multiples of 12'-6".
- For details of the Buried Post End Anchor used with Type 16C Layout, see Revised Standard Plan RSP A77T2.
- As site conditions dictate, construct additional MGS to shield fixed object(s). Additional MGS length equal to multiples of 12'-6". Post spacing at 6'-3" except as specified in Note 4.
- Layout Types 16A, 16B or 16C are typically used where MGS is recommended to shield roadside fixed object(s) and a crashworthy 31" end treatment is required for only one direction of traffic.
- Where placement of dike is required with MGS, see Revised Standard Plan RSP A77N4 for dike positioning details.
- For typical flare offsets for 25'-0" length parabola with maximum offset of 1'-0", see Revised Standard Plan RSP A77P1.
- W6 x 15 steel post, 8'-0" in length, with 8" x 12" x 1'-2" notched wood block or notched recycled plastic blocks may be used in place of the 10" x 10" x 8'-0" wood post with 8" x 12" x 1'-2" wood block shown in the detail "Strengthened Midwest Guardrail System Sections for Fixed Object".

Use strengthened MGS sections with Types 16A, 16B or 16C layouts where minimum clearance between the face of the railing and fixed object(s) is less than 4'-0", but not less than 3'-0". See Note 4.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
ROADSIDE FIXED OBJECTS**

NO SCALE

RSP A77R3 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77R3**

2010 REVISED STANDARD PLAN RSP A77R3



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	225	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 6-1-15

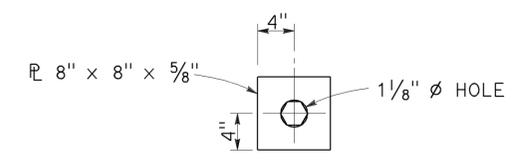


**DETAIL "A"**  
**CABLE CONNECTION**  
**END PLATE**

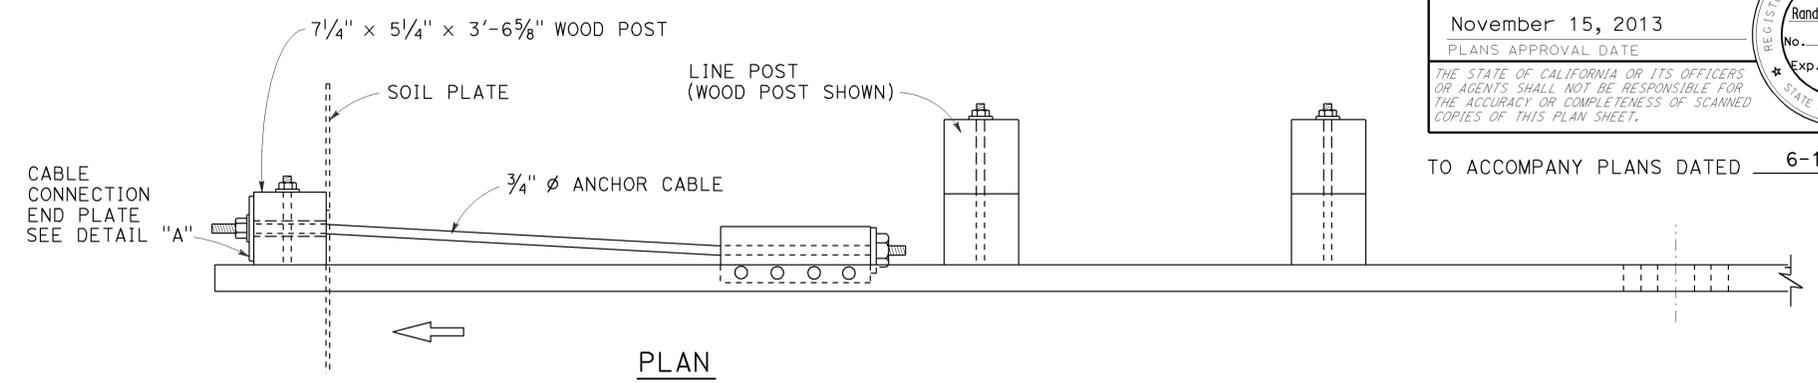

**PLAN**

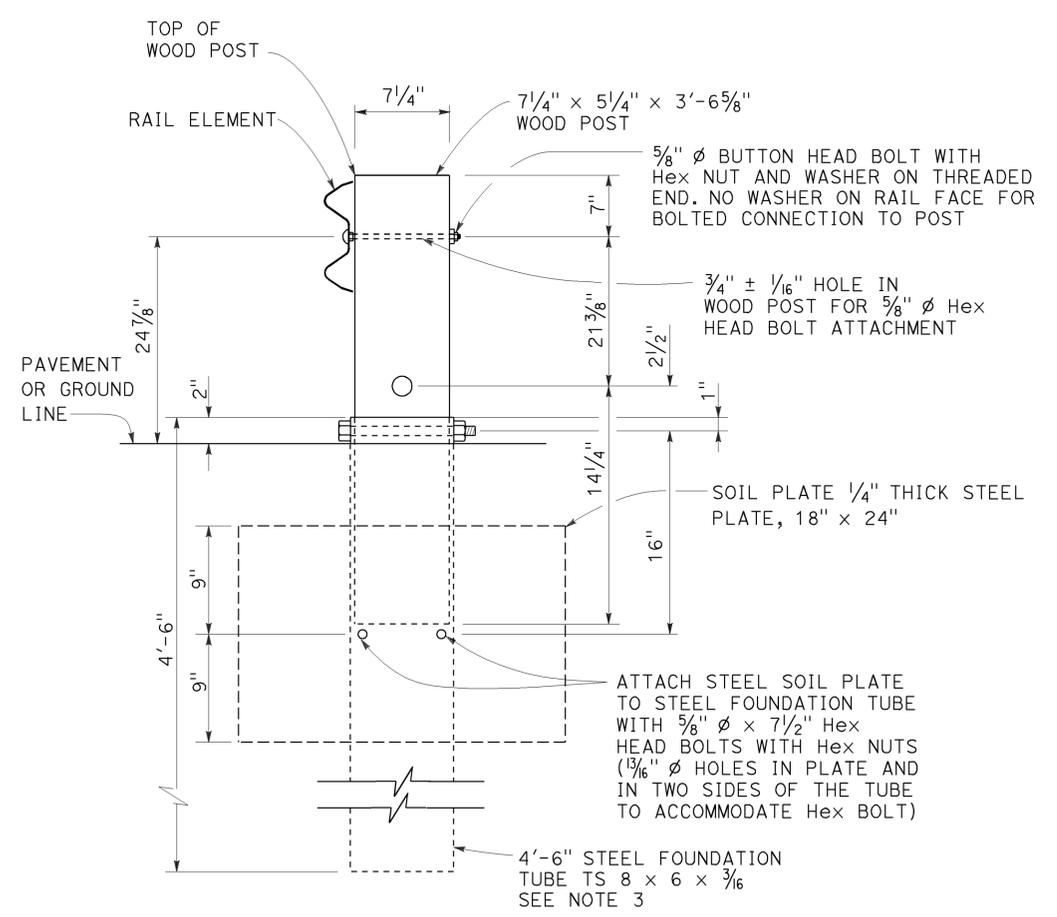

**SECTION A-A**

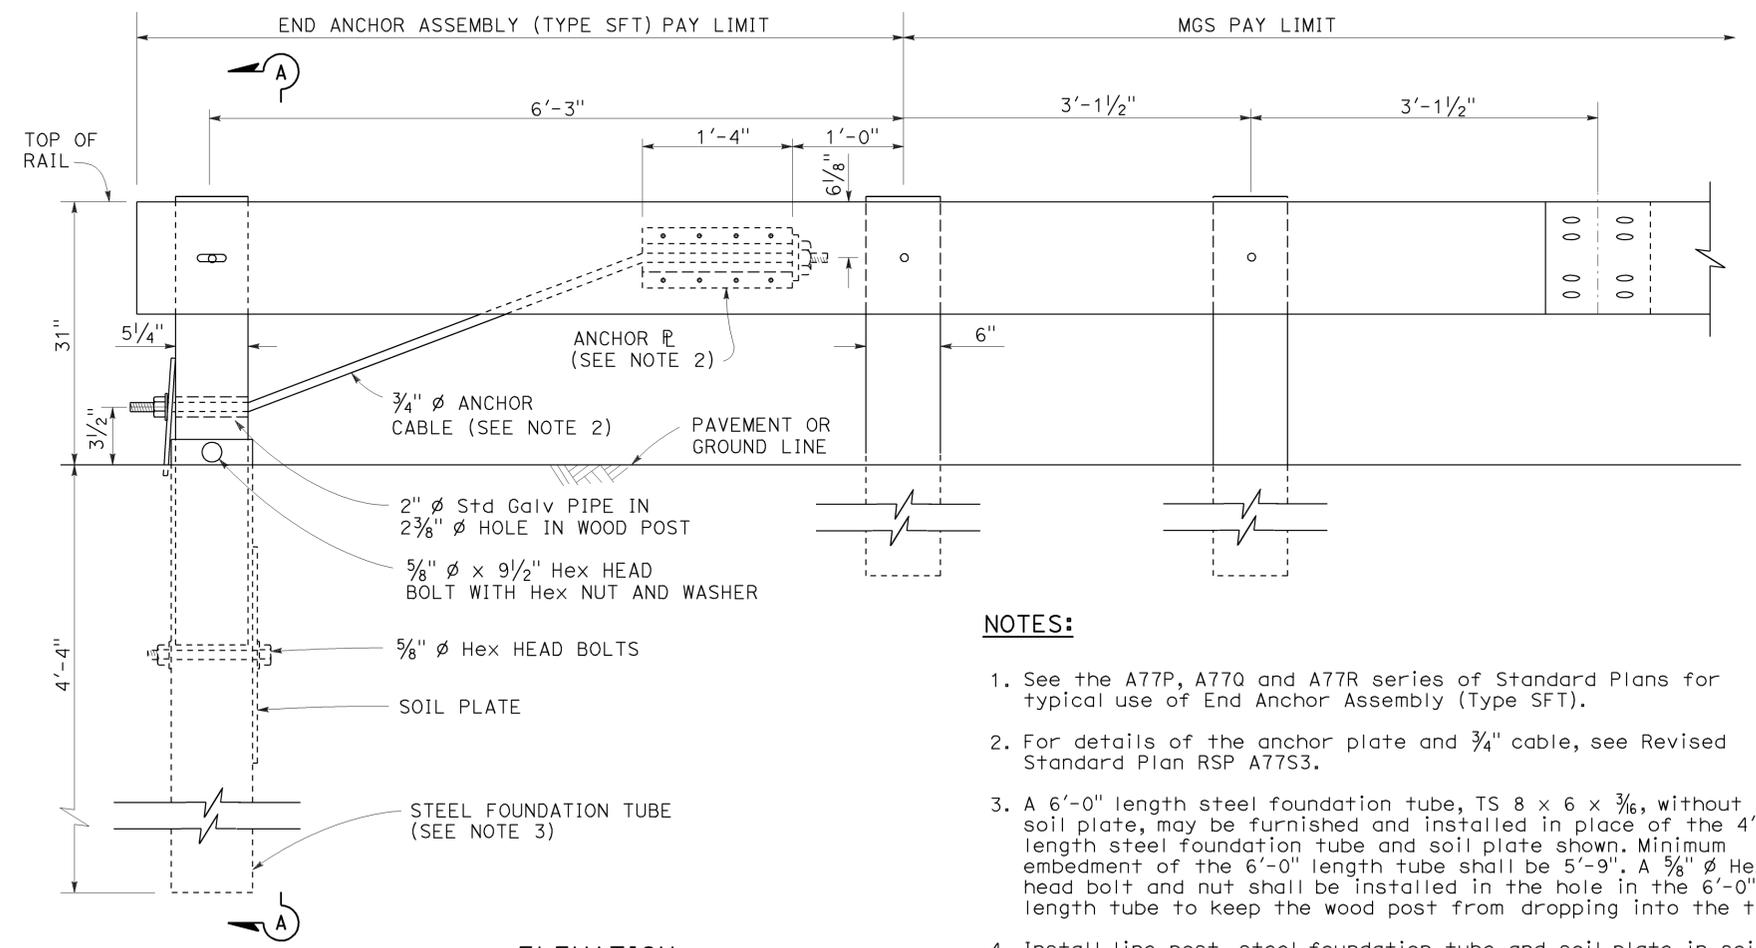

**ELEVATION**

**END ANCHOR**  
**ASSEMBLY (TYPE SFT)**  
See Note 1

**NOTES:**

1. See the A77P, A77Q and A77R series of Standard Plans for typical use of End Anchor Assembly (Type SFT).
2. For details of the anchor plate and 3/4" cable, see Revised Standard Plan RSP A77S3.
3. A 6'-0" length steel foundation tube, TS 8 x 6 x 3/16, without a soil plate, may be furnished and installed in place of the 4'-6" length steel foundation tube and soil plate shown. Minimum embedment of the 6'-0" length tube shall be 5'-9". A 5/8" diameter hex head bolt and nut shall be installed in the hole in the 6'-0" length tube to keep the wood post from dropping into the tube.
4. Install line post, steel foundation tube and soil plate in soil.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM**  
**END ANCHOR ASSEMBLY**  
**(TYPE SFT)**

NO SCALE

RSP A77S1 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77S1 DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77S1**

**2010 REVISED STANDARD PLAN RSP A77S1**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	226	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA



THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

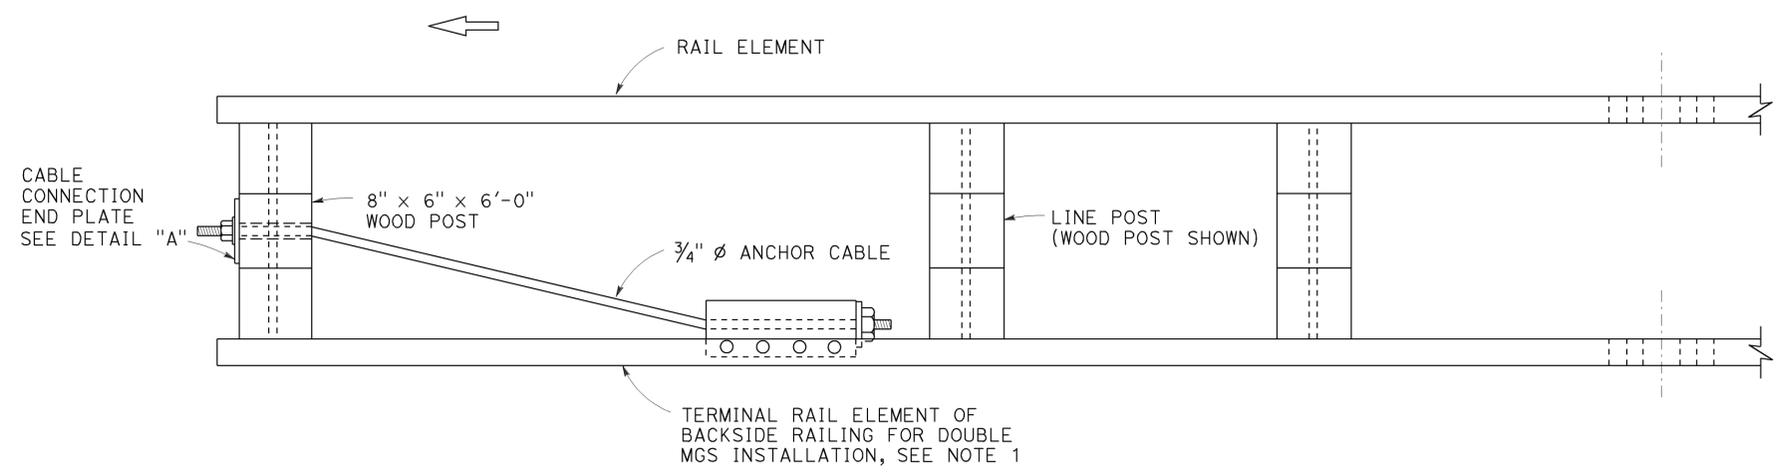

**NOTES:**

1. See Revised Standard Plans RSP A77Q3 and RSP A77R1 for typical use of rail tensioning assembly.
2. For details of the anchor plate and 3/4" cable, see Revised Standard Plan RSP A77S3.

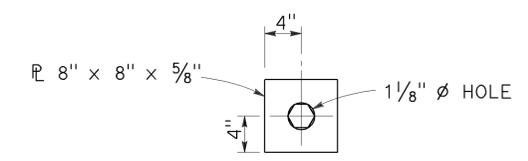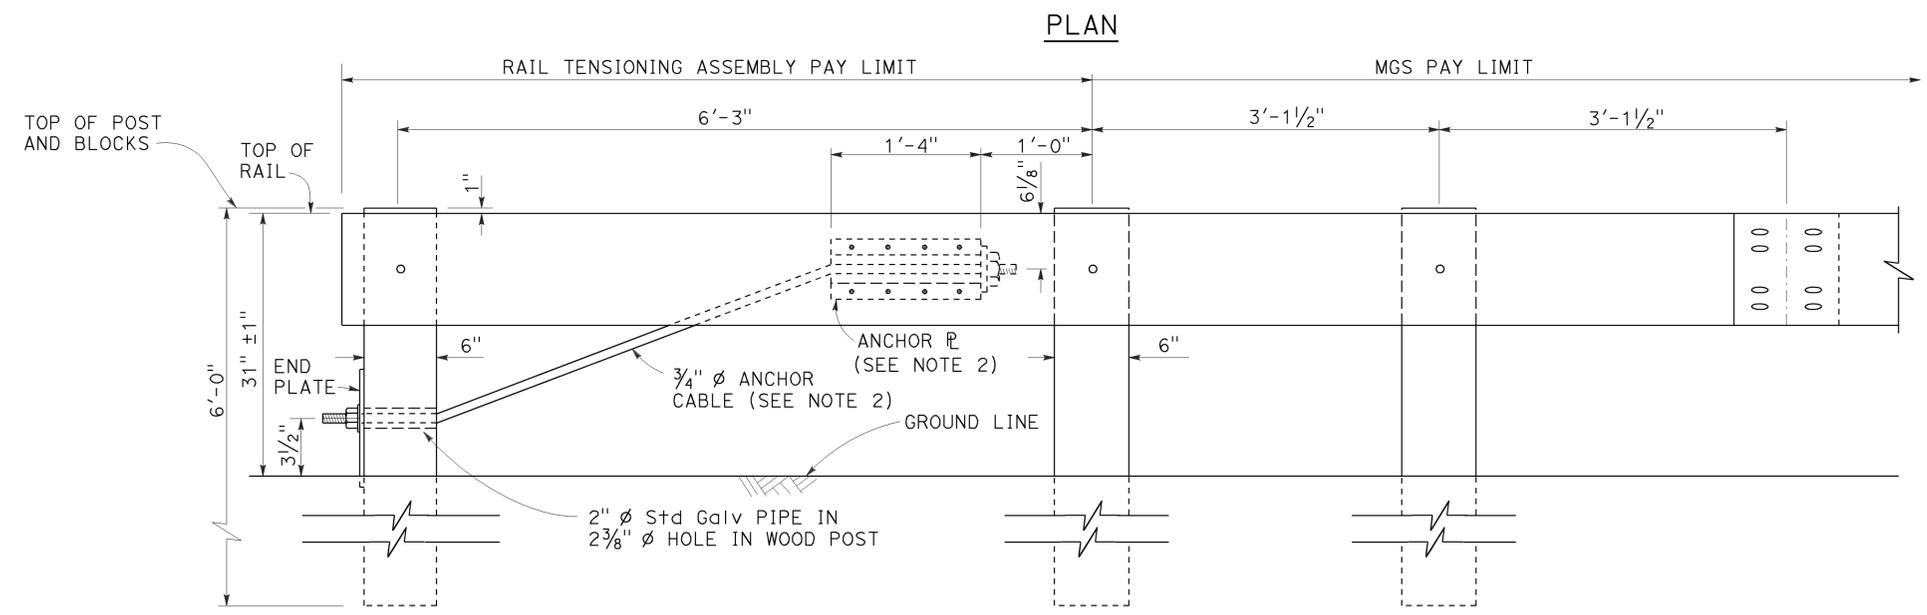

**DETAIL "A"**  
**CABLE CONNECTION**  
**END PLATE**

**ELEVATION**  
**RAIL TENSIONING**  
**ASSEMBLY**  
See Note 1

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM**  
**RAIL TENSIONING ASSEMBLY**

NO SCALE

RSP A77S2 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77S2**

2010 REVISED STANDARD PLAN RSP A77S2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	227	265

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


November 15, 2013  
PLANS APPROVAL DATE

*Randell D. Hiatt*  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

**NOTE:**  
See Revised Standard Plans RSP A77S1, RSP A77S2 and RSP A77T1 for typical use of anchor cable and anchor plate.

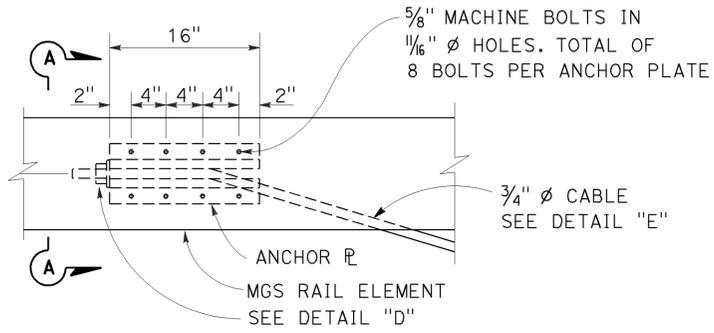


**ANCHOR PLATE DETAIL**  
(MGS shown, TBB similar)

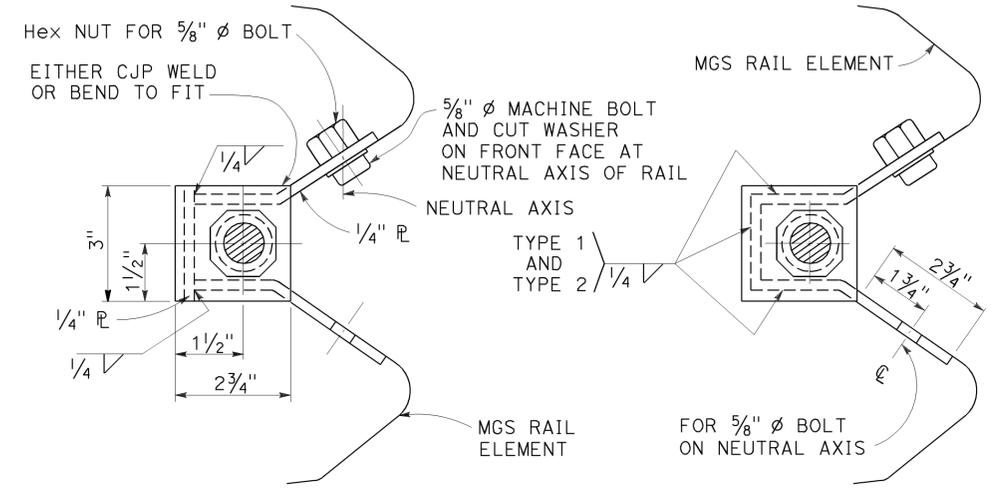


**NOTE:**  
Dimensioning applies to both types.

**SECTION A-A (ALTERNATIVE TYPE 1)**      **SECTION A-A (ALTERNATIVE TYPE 2)**

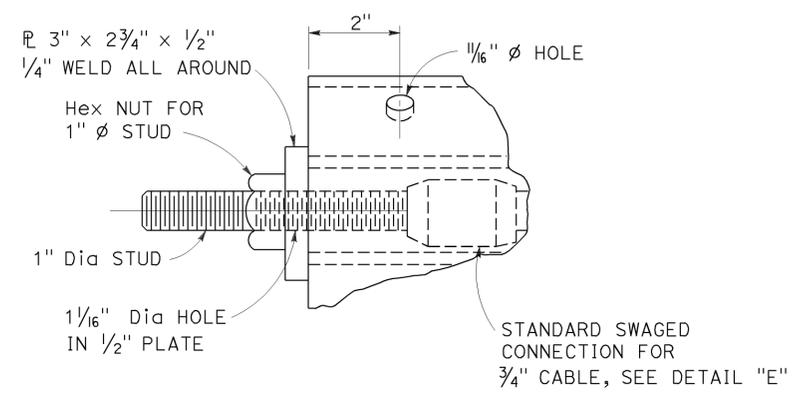

**DETAIL "D"**

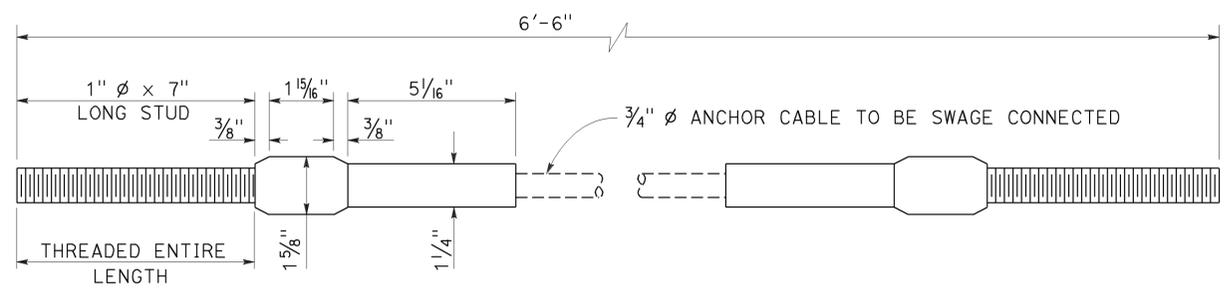

**ANCHOR CABLE WITH SWAGED FITTING AND STUD**  
**DETAIL "E"**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL RAILING  
ANCHOR CABLE AND  
ANCHOR PLATE DETAILS**

NO SCALE  
RSP A77S3 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77S3  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP A77S3

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	228	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

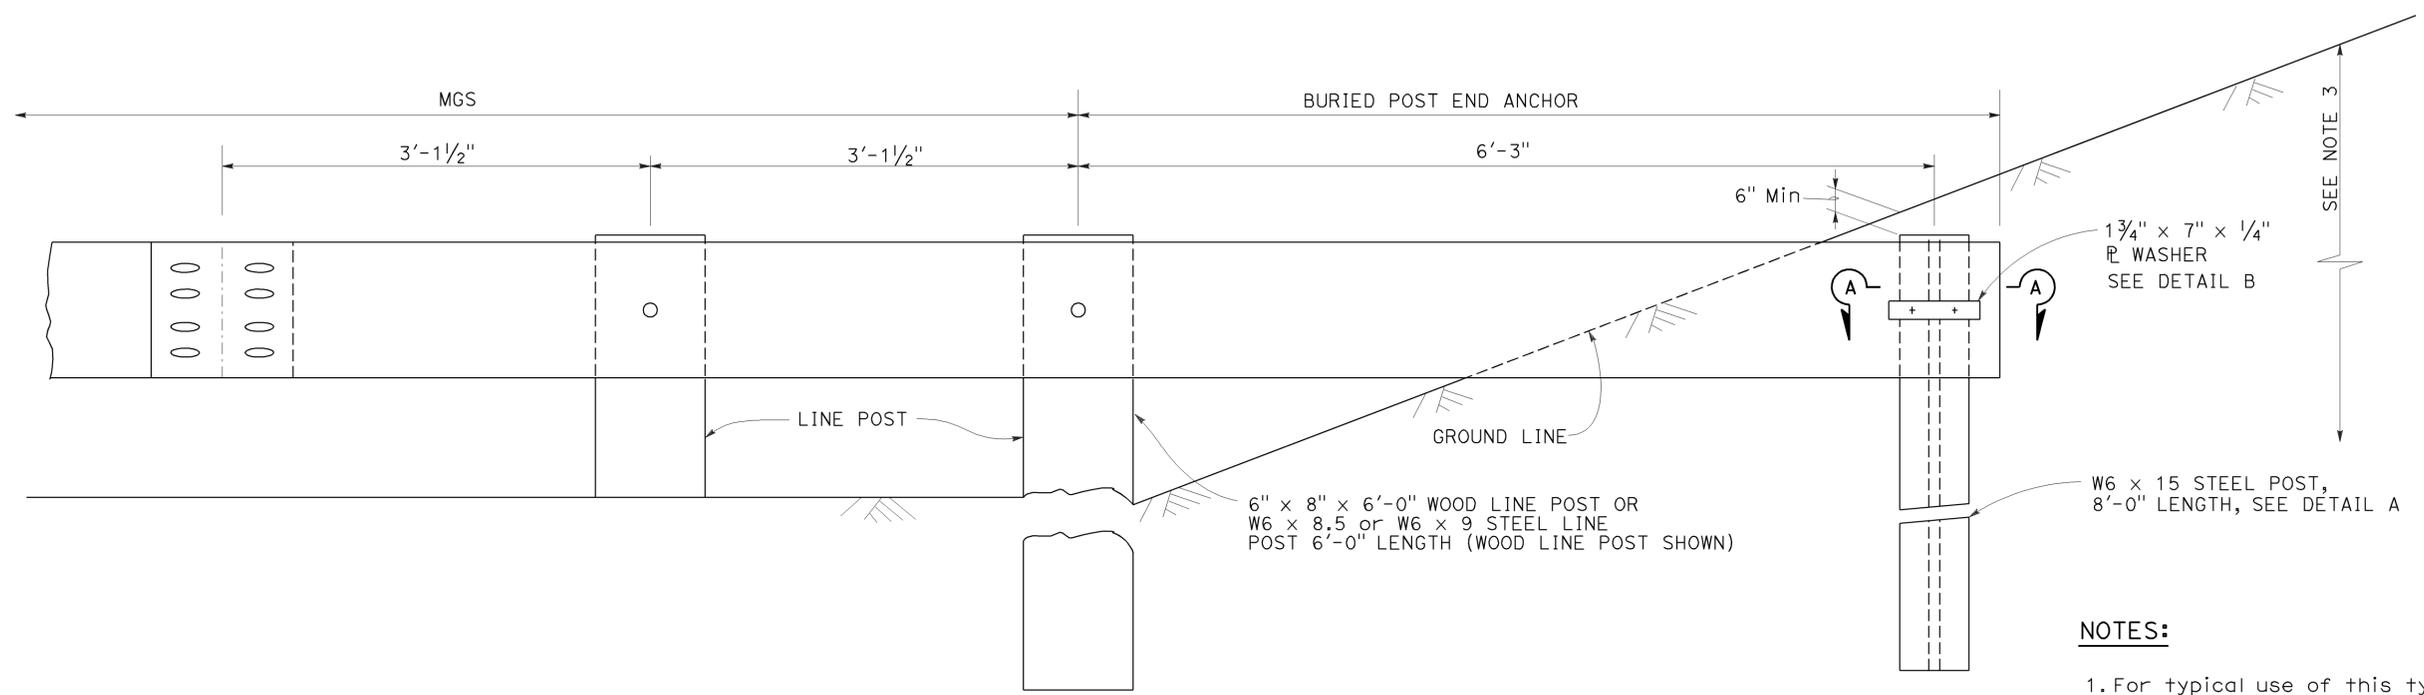


**BURIED POST END ANCHOR**


See Note 3

**NOTES:**


1. For typical use of this type of end anchor with MGS see the A77P, A77Q and A77R Series of the Standard Plans.
2. Holes excavation in the slope to construct the buried post end anchor shall be backfilled with selected earth, placed in layers approximately 1'-0" thick. Each layer shall be moistened and thoroughly compacted.
3. The buried post end anchor shall only be constructed at those locations where the slope perpendicular to the roadway is non-traversable.

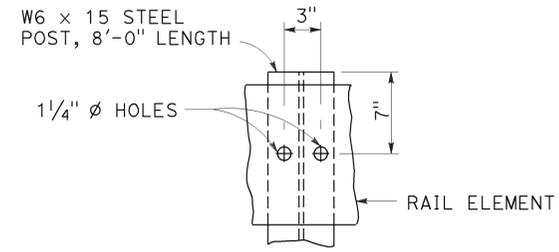

**DETAIL A**

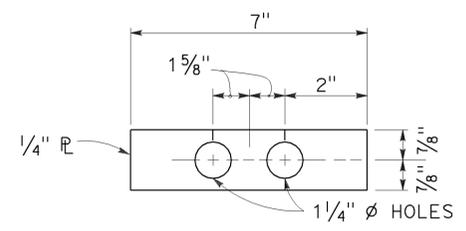

**DETAIL B**

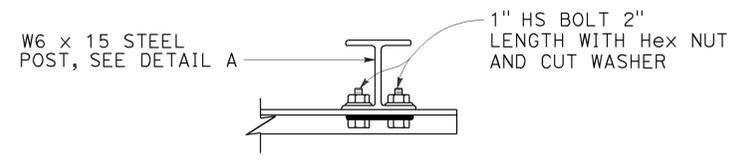

**SECTION A-A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
BURIED POST END ANCHOR**

NO SCALE

RSP A77T2 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77T2  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77T2**

2010 REVISED STANDARD PLAN RSP A77T2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	229	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

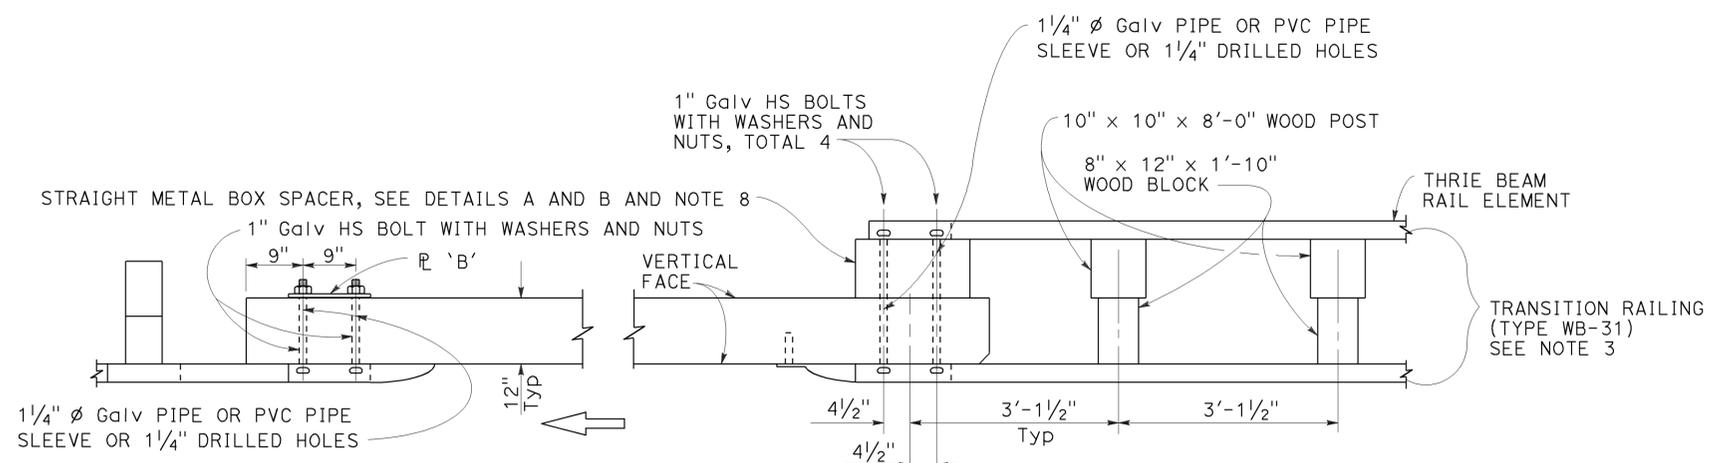

PLAN

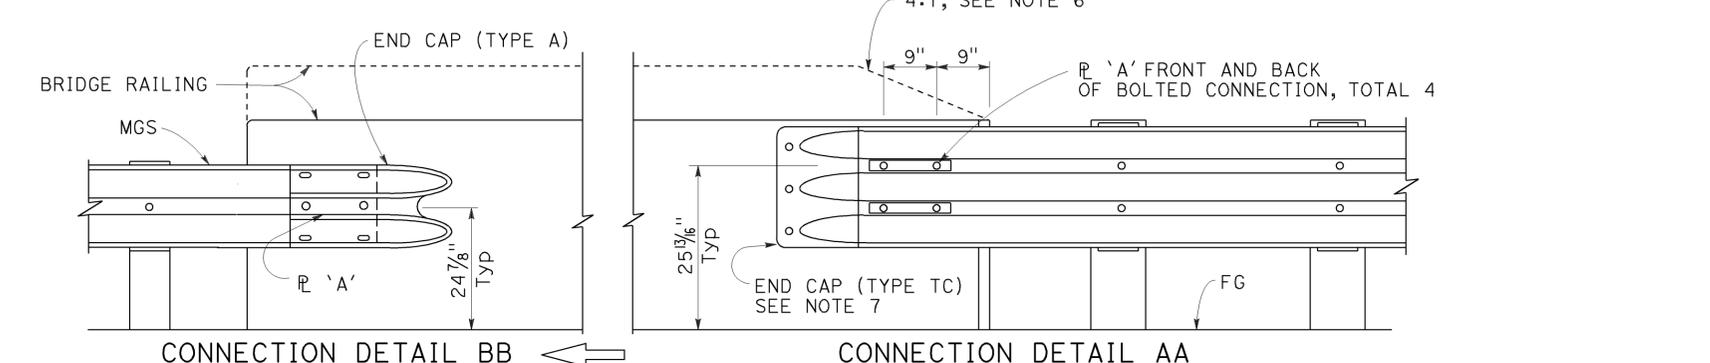


ELEVATION

**MIDWEST GUARDRAIL SYSTEM CONNECTION TO BRIDGE RAILING WITHOUT SIDEWALK**

**NOTES:**

1. See Revised Standard Plan RSP A77U2 for additional connection details to bridges without sidewalks.
2. Additional details of posts, blocks and hardware are shown on Revised Standard Plans RSP A77M1, RSP A77N1 and RSP A77N2.
3. For additional details of Transition Railing (Type WB-31), see Revised Standard Plan RSP A77U4. Transition Railing (Type WB-31) transitions the 12 gauge MGS railing section to a heavier gage nested thrie beam railing section which is connected to the concrete bridge railing.
4. For typical use of Connection Detail AA, see Layout Types 12A and 12B on Revised Standard Plan RSP A77Q1, Layout Types 12C and 12D on Revised Standard Plan RSP A77Q2, and Layout Type 12E on Revised Standard Plan RSP A77Q3.
5. For typical use of Connection Detail BB, see Layout Type 12D (structure departure railing connection) on Revised Standard Plan RSP A77Q2 and Layout Type 12DD on Revised Standard Plan RSP A77Q5.
6. Where the height of the bridge railing exceeds the height of the thrie beam railing by more than 1" at Connection Detail AA, taper the top of the end of the bridge railing at 4:1 to match the top elevation of the thrie beam rail.
7. For details of End Cap (Type TC), see Revised Standard Plan RSP A77U4.
8. See Revised Standard Plan RSP A77U4 for additional details regarding depth dimension for straight metal box spacer.

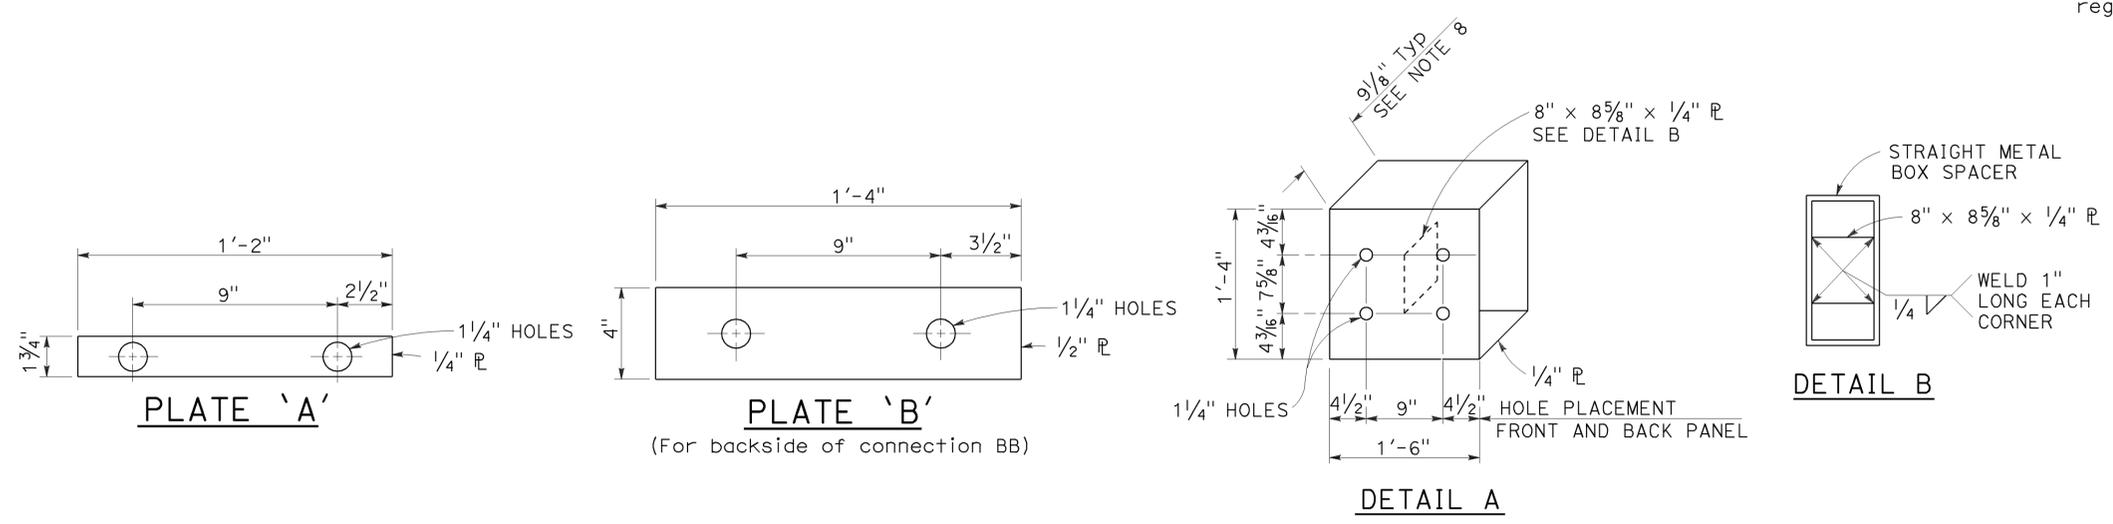

**STRAIGHT METAL BOX SPACER**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM CONNECTIONS TO BRIDGE RAILINGS WITHOUT SIDEWALKS**  
**DETAILS No. 1**

NO SCALE

RSP A77U1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77U1**

2010 REVISED STANDARD PLAN RSP A77U1

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, LO.0/15.3	230	265



**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA





TO ACCOMPANY PLANS DATED 6-1-15

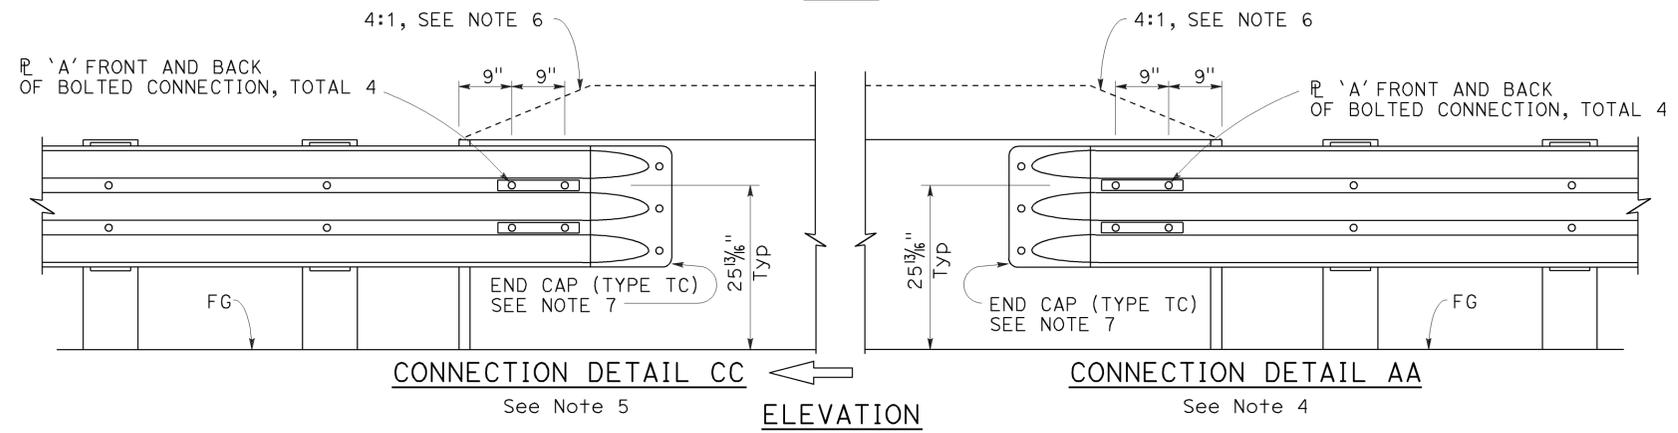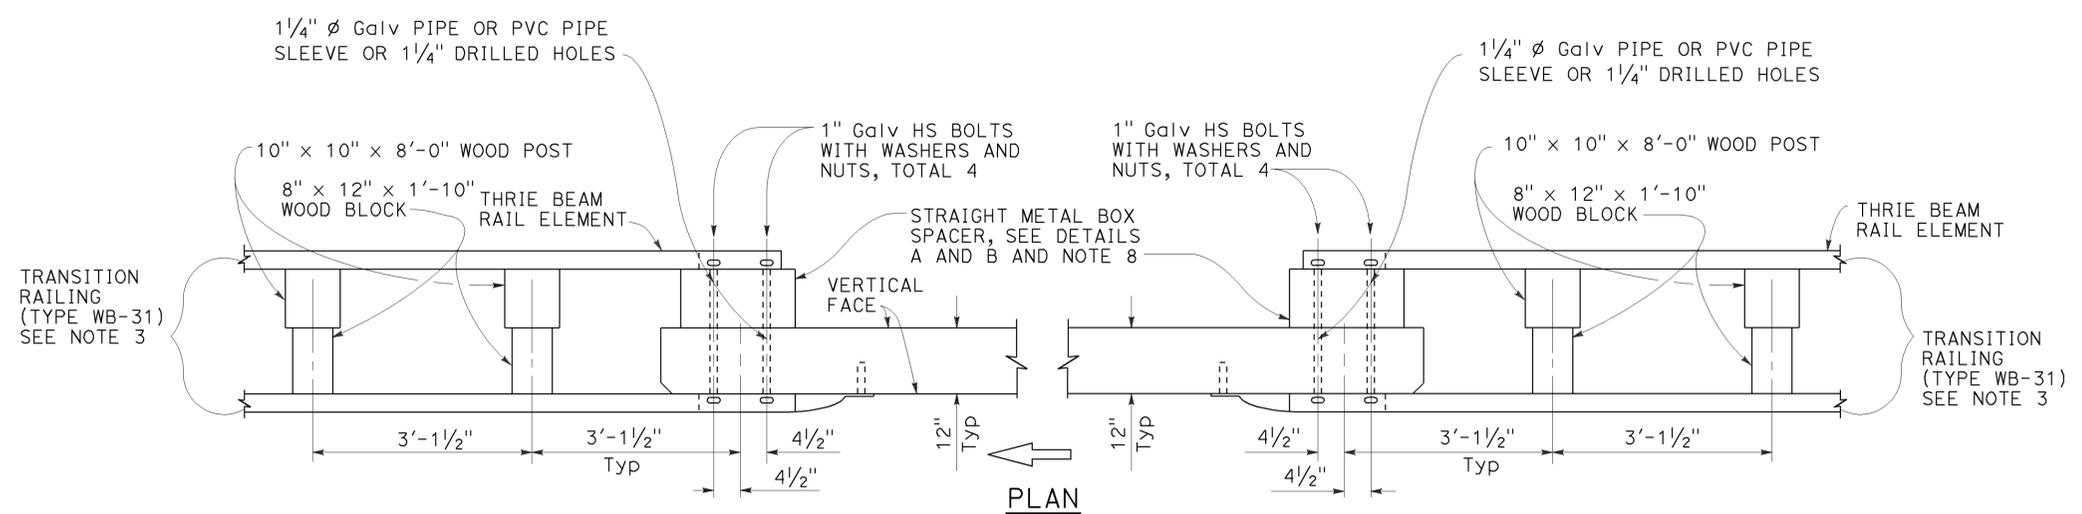

**MIDWEST GUARDRAIL SYSTEM CONNECTION TO BRIDGE RAILING WITHOUT SIDEWALK**

**NOTES:**

1. See Revised Standard Plan RSP A77U1 for additional connection details to bridges without sidewalks.
2. Additional details of posts, blocks and hardware are shown on Revised Standard Plans RSP A77M1, RSP A77N1 and RSP A77N2.
3. For additional details of Transition Railing (Type WB-31), see Revised Standard Plan RSP A77U4. Transition Railing (Type WB-31) transitions the 12 gauge MGS railing section to a heavier gage nested thrie beam railing section which is connected to the concrete bridge railing.
4. For typical use of Connection Detail AA, see Layout Types 12A and 12B on Revised Standard Plan RSP A77Q1, Layout Types 12C and 12D on Revised Standard Plan RSP A77Q2, and Layout Type 12E on Revised Standard Plan RSP A77Q3.
5. For typical use of Connection Detail CC, see Layout Types 12AA and 12BB on Revised Standard Plan RSP A77Q4 and Layout Type 12CC on Revised Standard Plan RSP A77Q5.
6. Where the height of the bridge railing exceeds the height of the thrie beam railing by more than 1" at Connection Detail AA and connection Detail CC, taper the top of the end of the bridge railing at 4:1 to match the top elevation of the thrie beam railing.
7. For details of End Cap (Type TC), see Revised Standard Plan RSP A77U4.
8. See Revised Standard Plan RSP A77U4 for additional details regarding depth dimension for straight metal box spacer.

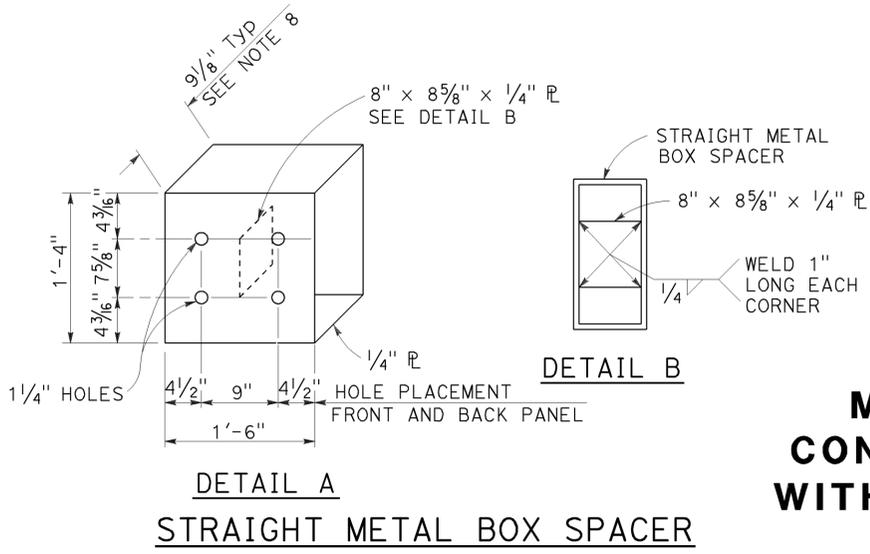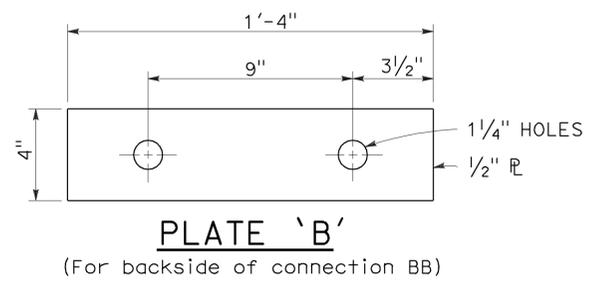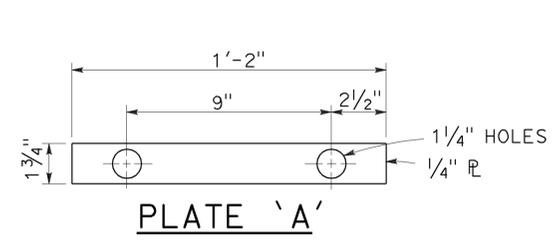

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION








**MIDWEST GUARDRAIL SYSTEM  
CONNECTIONS TO BRIDGE RAILINGS  
WITHOUT SIDEWALKS DETAILS No. 2**

NO SCALE

2010 REVISED STANDARD PLAN RSP A77U2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	231	265

**Randell D. Hiatt**  
 REGISTERED CIVIL ENGINEER  
 January 23, 2015  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

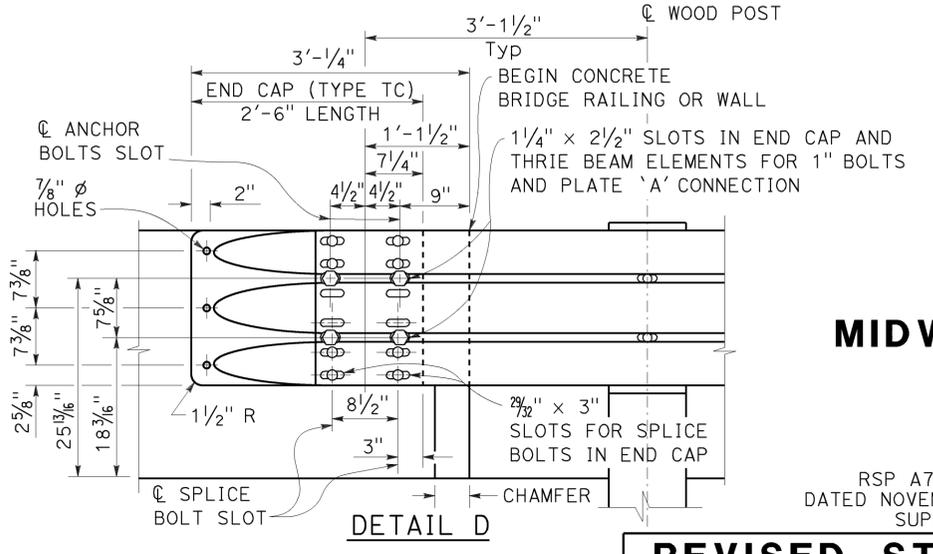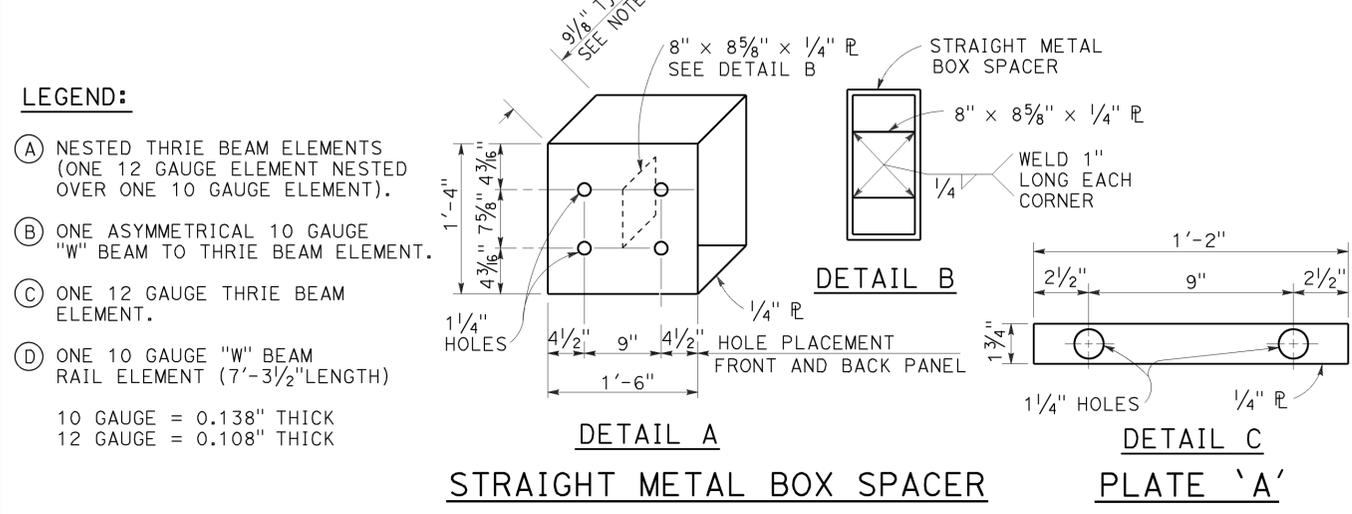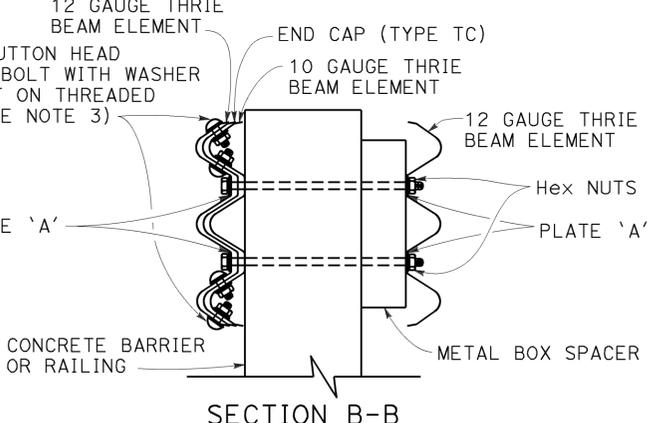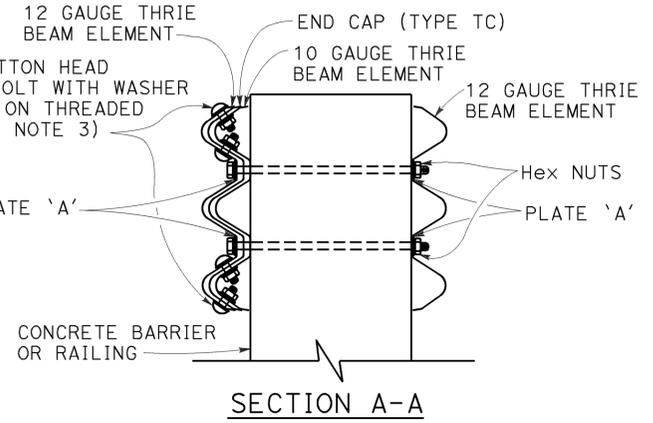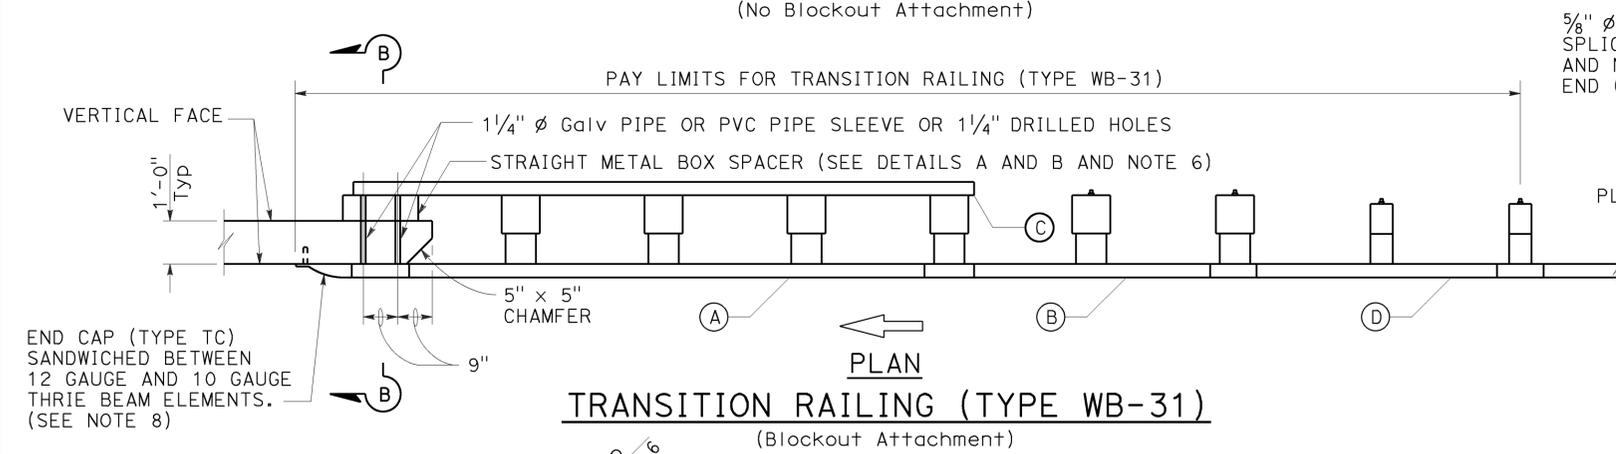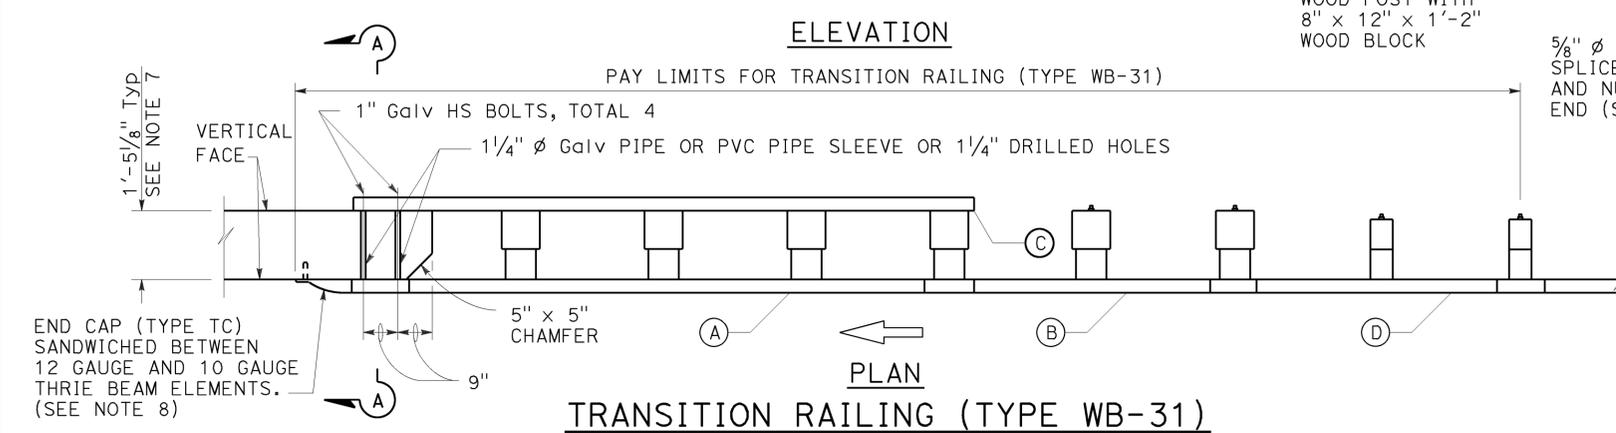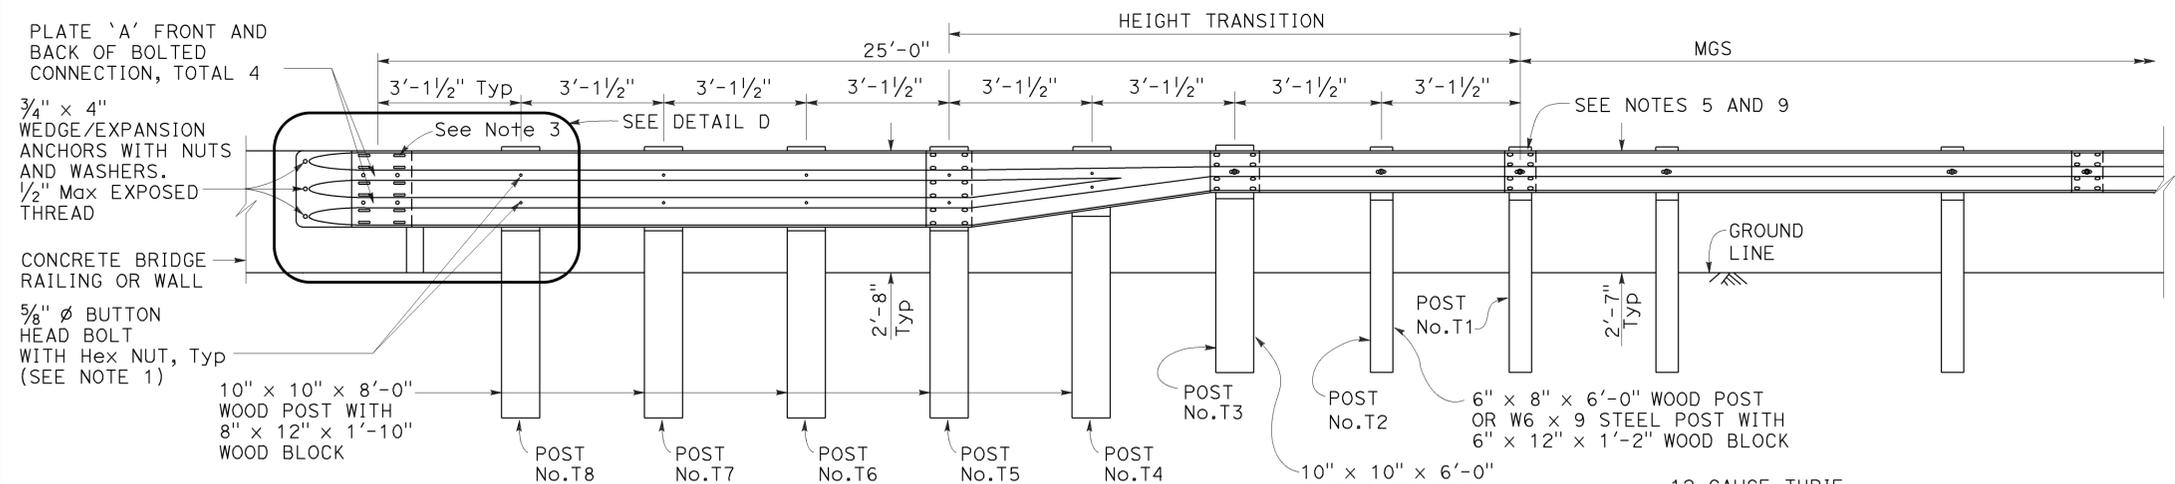

- NOTES:** TO ACCOMPANY PLANS DATED 6-1-15
- Use 5/8"  $\phi$  Button head bolts and hex nuts for connections to posts. No washer on rail face for bolted connections to post.
  - The nested rail elements, end cap, and 'W' beam to thrie beam element may be spliced together prior to bolting the elements to the wood post and concrete barrier or railing.
  - Exterior splice bolt holes for rail element splices at Post No. T5 and the connection to the concrete barrier or railing shall be the standard 7/32" x 1/8" slot size. Interior splice bolt holes at these locations may be increased up to 1/4"  $\phi$ . Only the top 4 and the bottom 4 splice bolts with washers and nuts are required for rail splices at Post No. T5 and the connection to the concrete barrier or railing.
  - The top elevation of Posts No. T2 through No. T7 shall not project more than 1" above the top elevation of the rail element.
  - Typically, the railing connected to Transition Railing (Type WB-31) will be either standard railing section of MGS with height transition ratio of 150:1 or a Caltrans approved 31" end treatment attached to Post No. T1.
  - The depth of the metal box spacer varies from the 9/8" to 1/2" and is dependent on the width of the concrete railing or wall. The combined dimension for the depth of the metal box spacer plus the width of railing or wall is typically 21 1/8". Where the space between the backside of the concrete railing or wall and the rear thrie beam element is less than 1/2", metal plates similar to Plate 'A' are to be used as spacers.
  - Where the width of the concrete railing or wall is greater than 17 1/8", wood blocks are to be used to fill the space created between the backside of Posts No. T5 through No. T8 and the rear thrie beam element. These wood blocks shall be 8" in width and 1'-2" in length. The dimension between the front thrie beam element and the rear thrie beam element is to match the width of the concrete railing or wall.
  - End cap may be installed over 12 gauge and 10 gauge thrie beam elements where transition railing is installed on the departure end of bridge railing.
  - Conform standard railing section height to 31" at Post No. T1 using height transition ratio of 150:1.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TRANSITION RAILING  
(TYPE WB-31)**

NO SCALE  
RSP A77U4 DATED JANUARY 23, 2015 SUPERSEDES RSP A77U4 DATED NOVEMBER 15, 2013 AND RSP A77U4 DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77U4**

2010 REVISED STANDARD PLAN RSP A77U4

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	232	265



**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE



THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15


2010 REVISED STANDARD PLAN RSP A78A

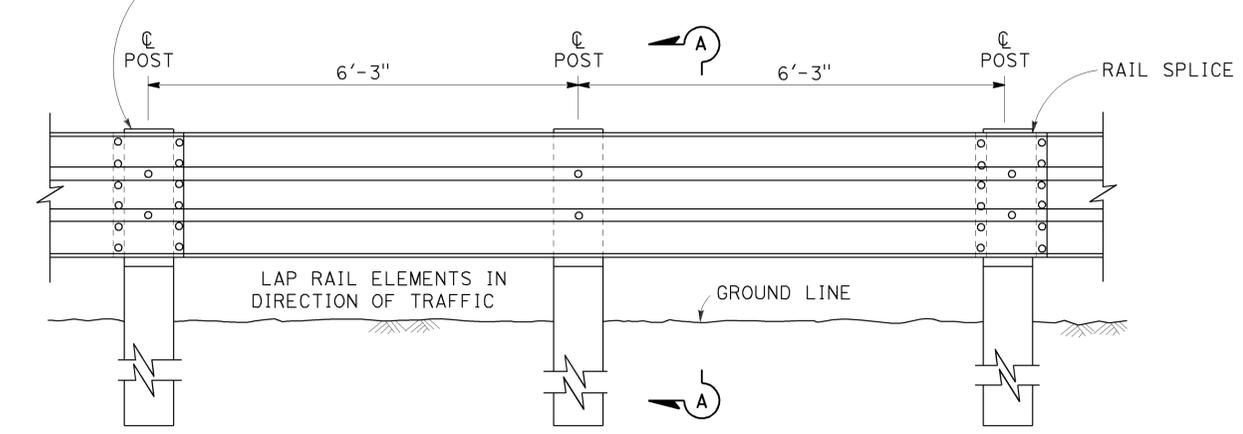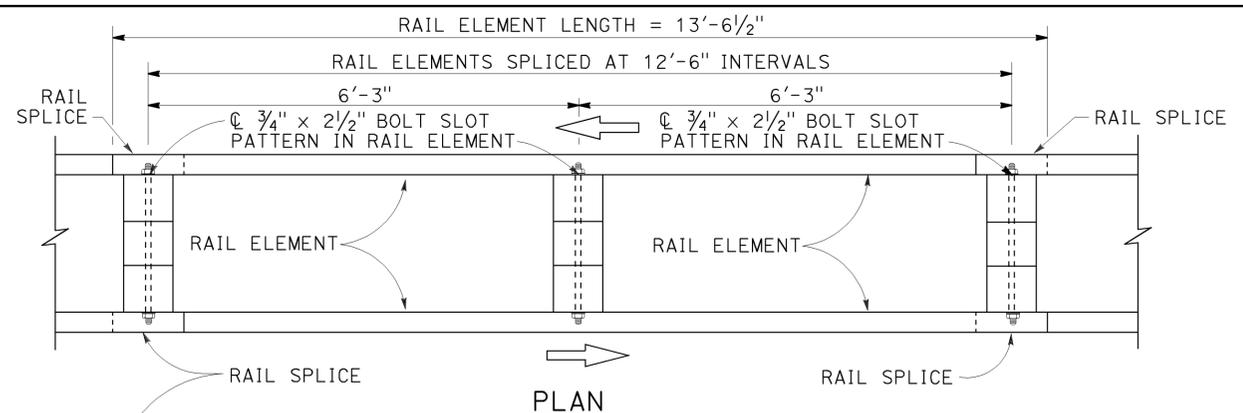


**DOUBLE THRIE BEAM BARRIER**  
(Wood post and blocks)  
See Note 1

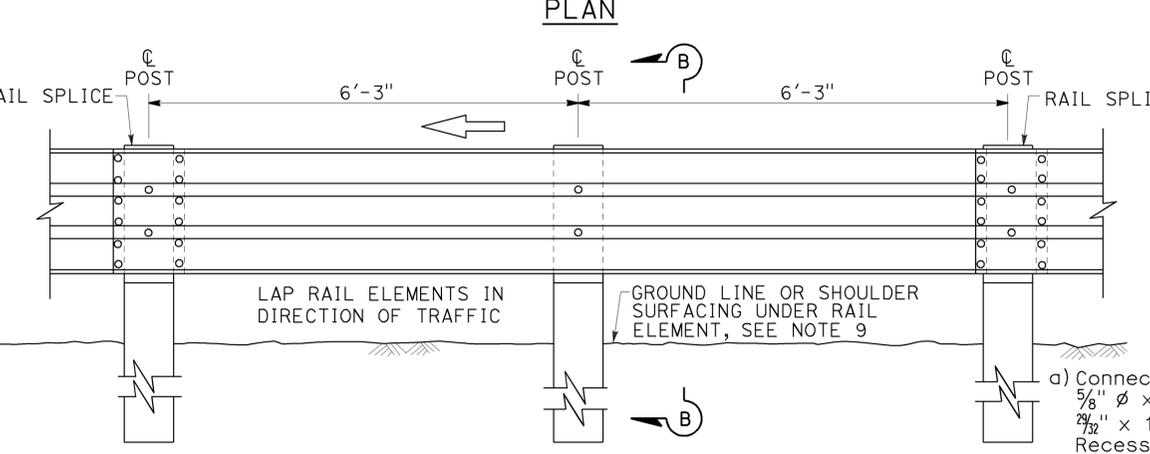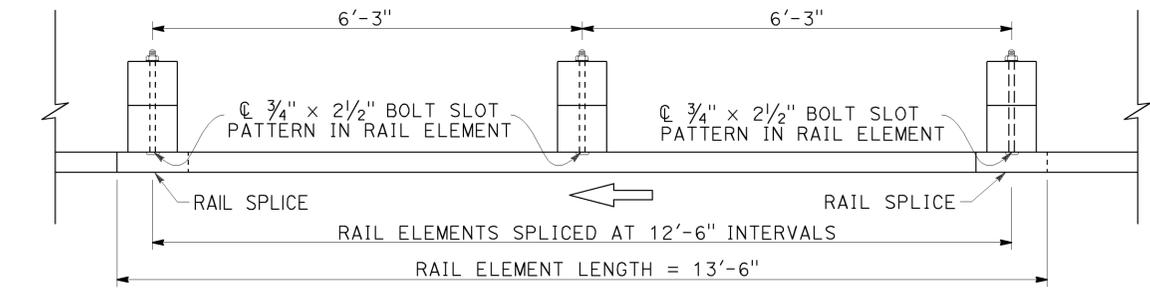


**SINGLE THRIE BEAM BARRIER**  
(Wood post and blocks)  
See Note 1

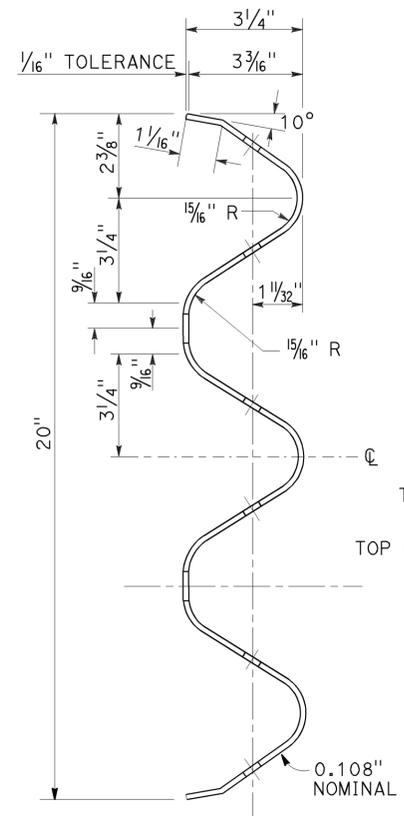


**SECTION THRU RAIL ELEMENT**

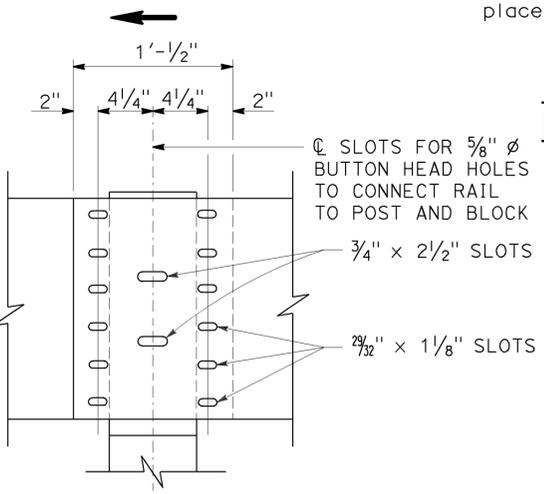

- Connect the overlapped ends of the thrie beam rail elements with 5/8" Ø x 1 1/4" button head oval shoulder bolts inserted into the 2 3/32" x 1 1/8" slots and bolted together with 5/8" Ø recessed hex nuts. Recess of hex nut points toward rail element. A total of 12 bolts and nuts are to be used at each rail splice connection.
- The ends of the rail elements are to be overlapped in the direction of traffic (see details).
- Where end cap is to be attached to the end of a rail element, a total of 4 of the above described splice bolts and nuts are to be used. Where a return cap is to be attached to the ends of rail elements, a total of 8 of the above described splice bolts and nuts are to be used.

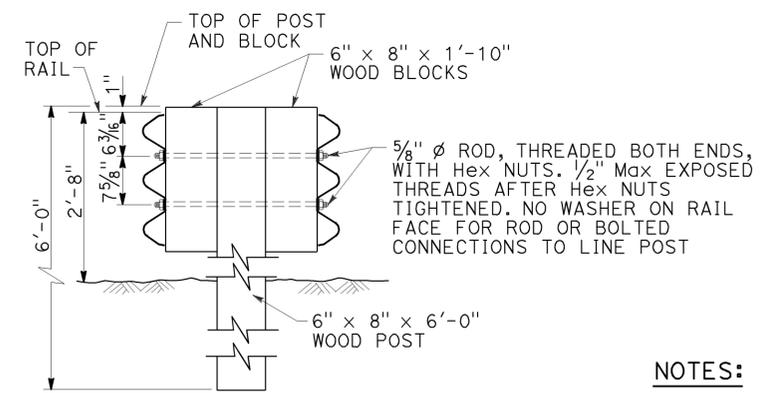


**TYPICAL WOOD LINE POST INSTALLATION**

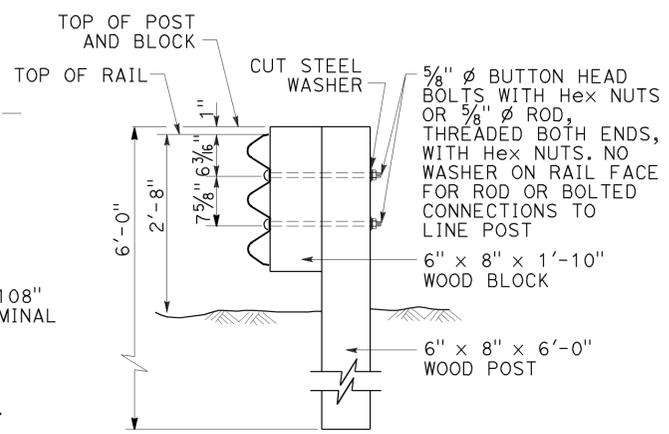

Where bolts are used, install so that the threaded end of the bolts and nuts are placed away from traffic side of rail.

**TYPICAL WOOD LINE POST INSTALLATION**

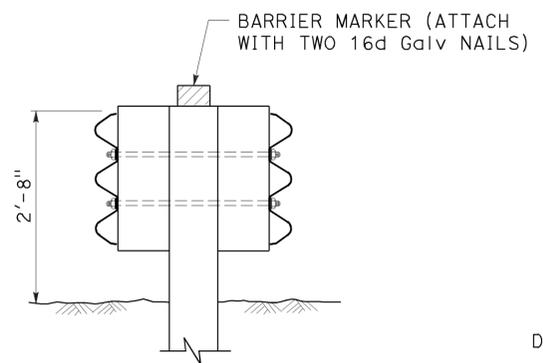

**THRIE BEAM BARRIER DELINEATION**  
See Note 8

**THRIE BEAM BARRIER STANDARD BARRIER RAILING SECTION (WOOD POST WITH WOOD BLOCK)**

NO SCALE

RSP A78A DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A78A DATED MAY 20, 2011 - PAGE 89 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A78A**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	233	265

Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE









THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

**NOTES:**

1. All holes in steel post to be  $\frac{13}{16}$ " Dia maximum. Holes in wood posts and wood blocks to be  $\frac{3}{4}$ " Dia  $\pm \frac{1}{16}$ ".
2. Dimensions shown for wood post are nominal.
3. For use with W6 x 8.5 or W6 x 9 steel post.
4. For use with W6 x 15 steel post.
5. Notched face of block faces steel post.

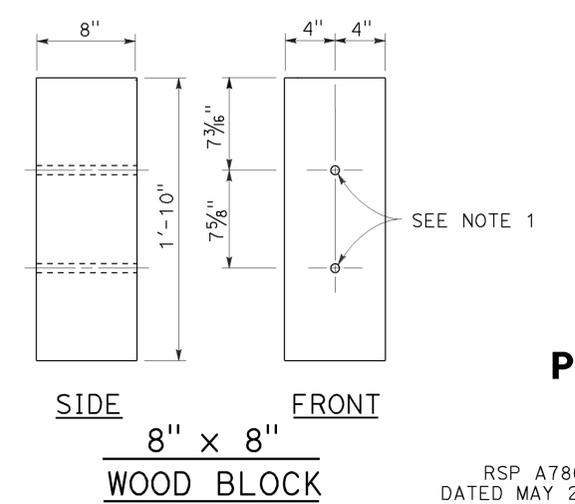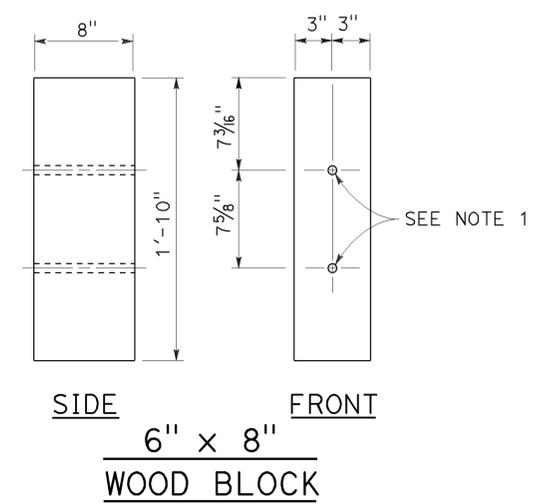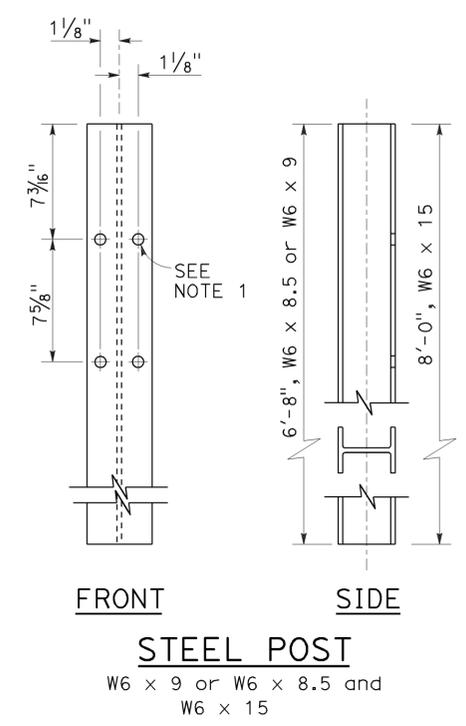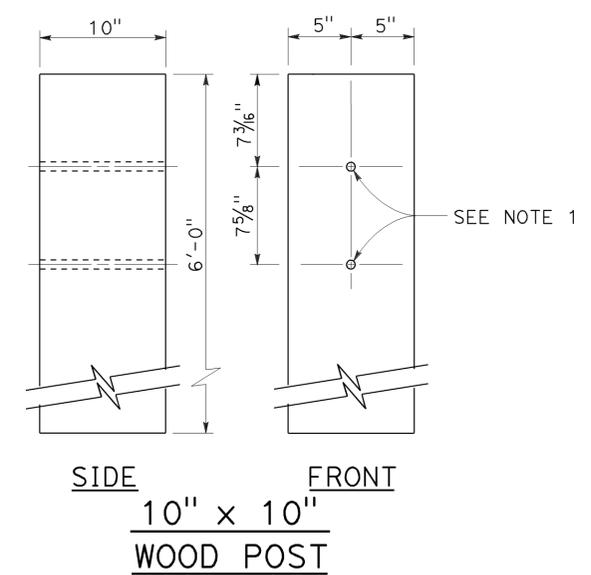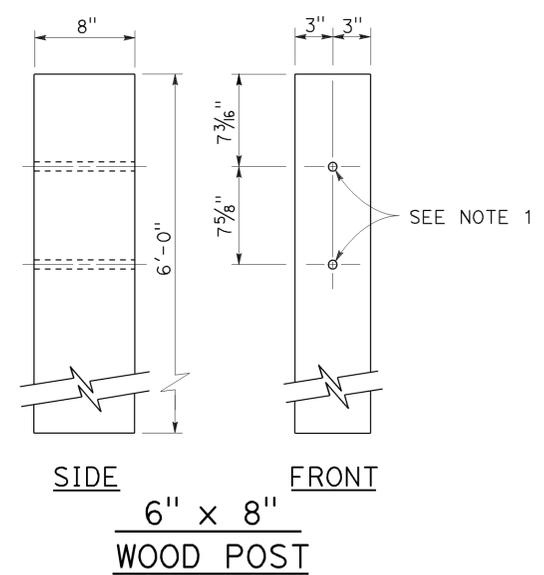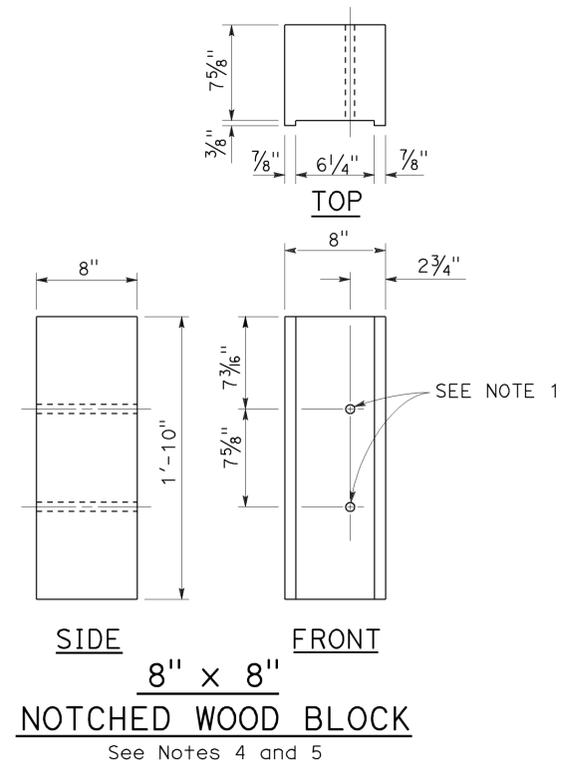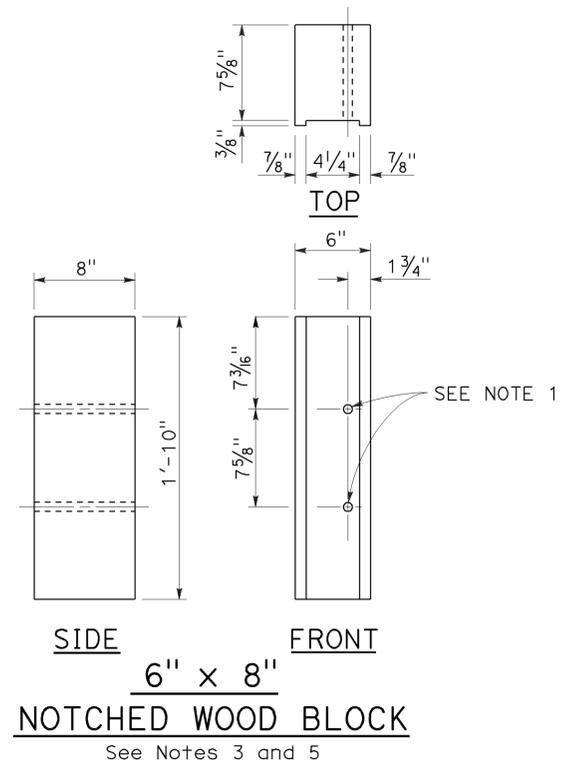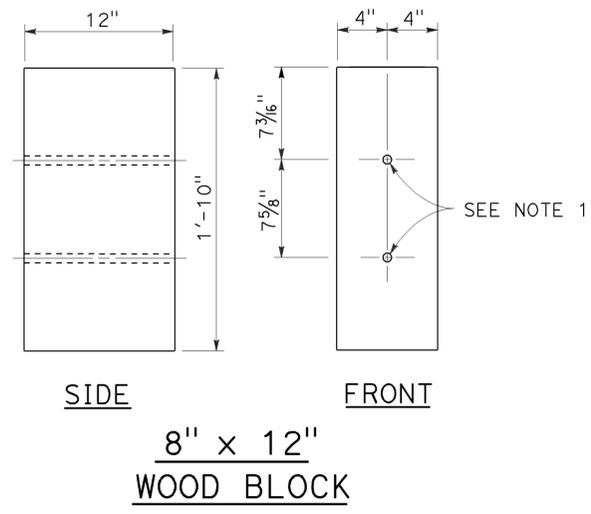

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**THRIE BEAM BARRIER  
POST AND BLOCK DETAILS**

NO SCALE

RSP A78C2 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A78C2  
DATED MAY 20, 2011 - PAGE 92 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP A78C2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	234	265


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

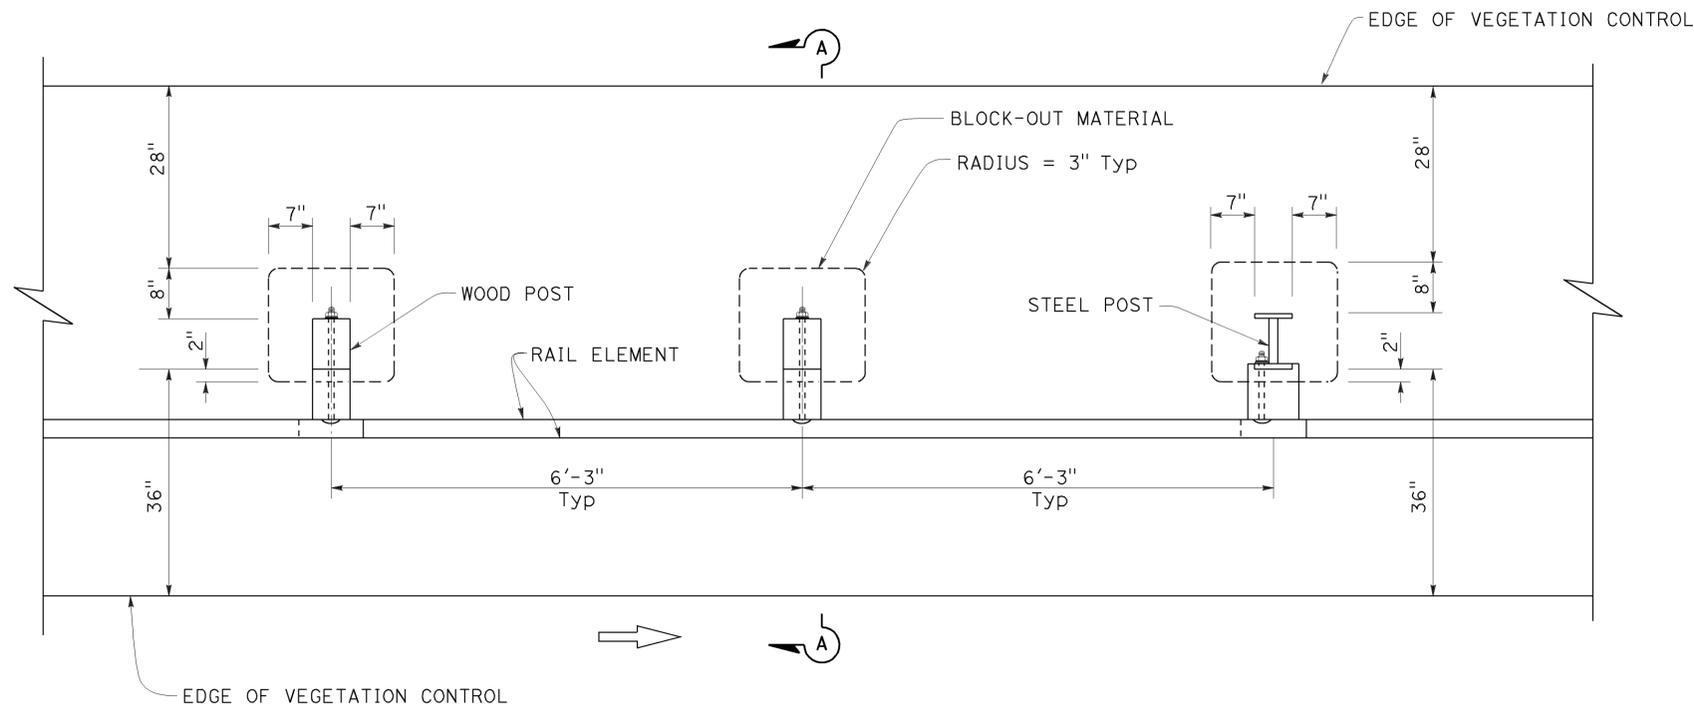

**NOTES:**

1. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
3. For wood and steel post sizes, see Revised Standard Plan RSP A77N2.
4. For details not shown, see Standard Plan A78B and Revised Standard Plan RSP A78A.

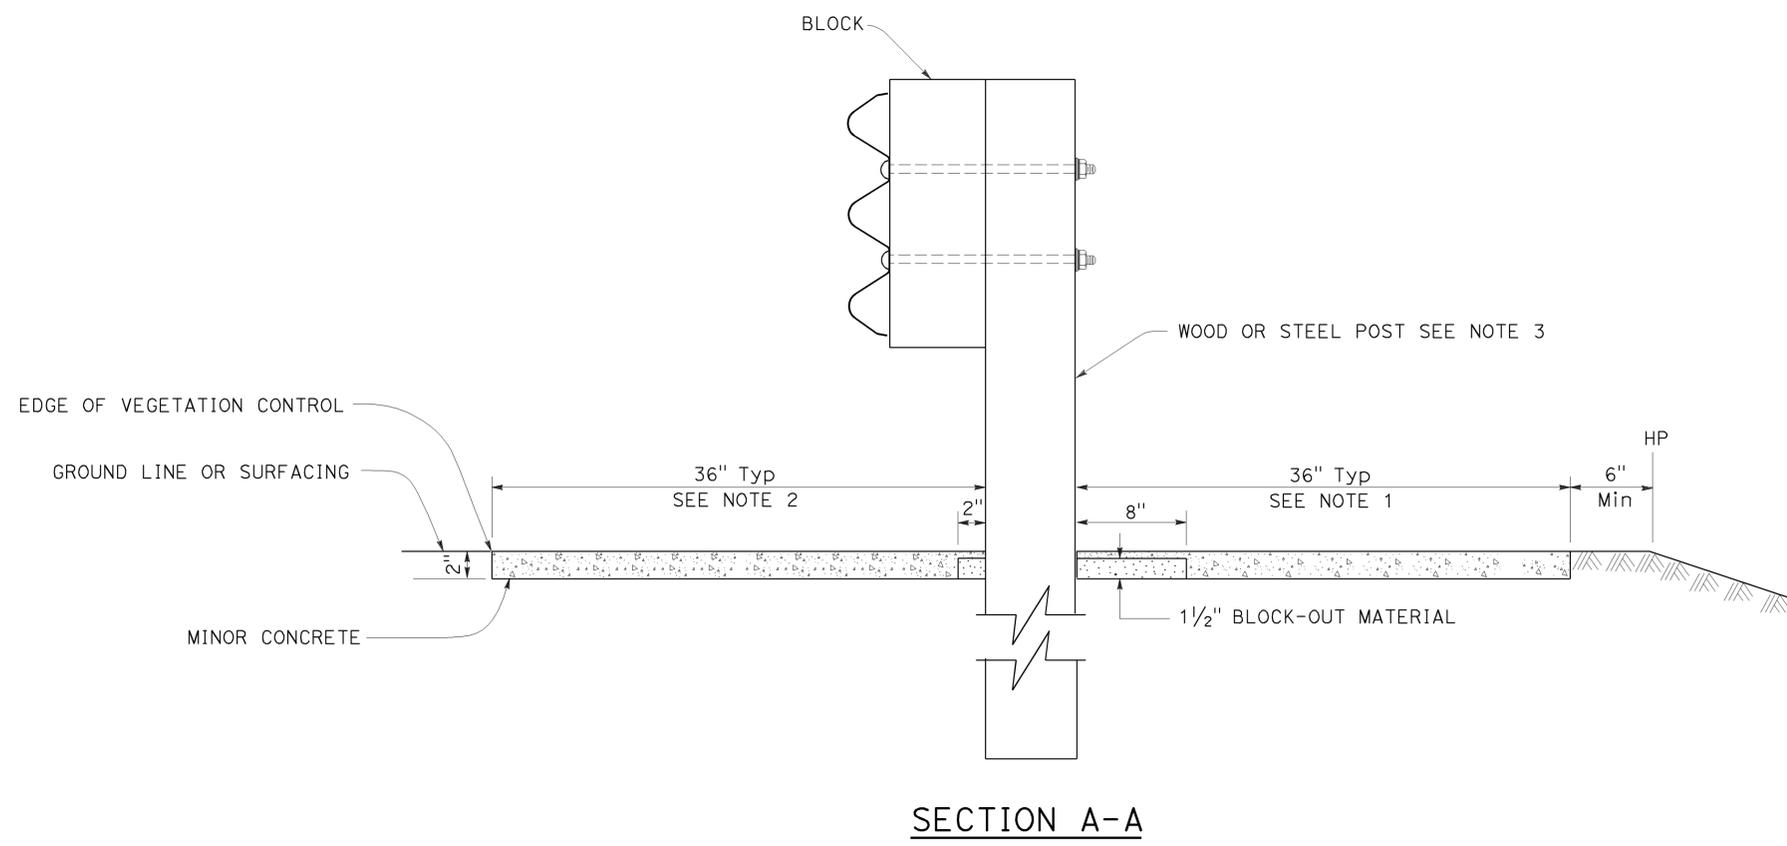

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**SINGLE THRIE BEAM BARRIER  
TYPICAL VEGETATION CONTROL  
STANDARD BARRIER RAILING SECTION**

NO SCALE

RSP A78C3 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A78C3 DATED MAY 20, 2011 - PAGE 93 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A78C3**

2010 REVISED STANDARD PLAN RSP A78C3

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	235	265



Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

October 19, 2012  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-13  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15

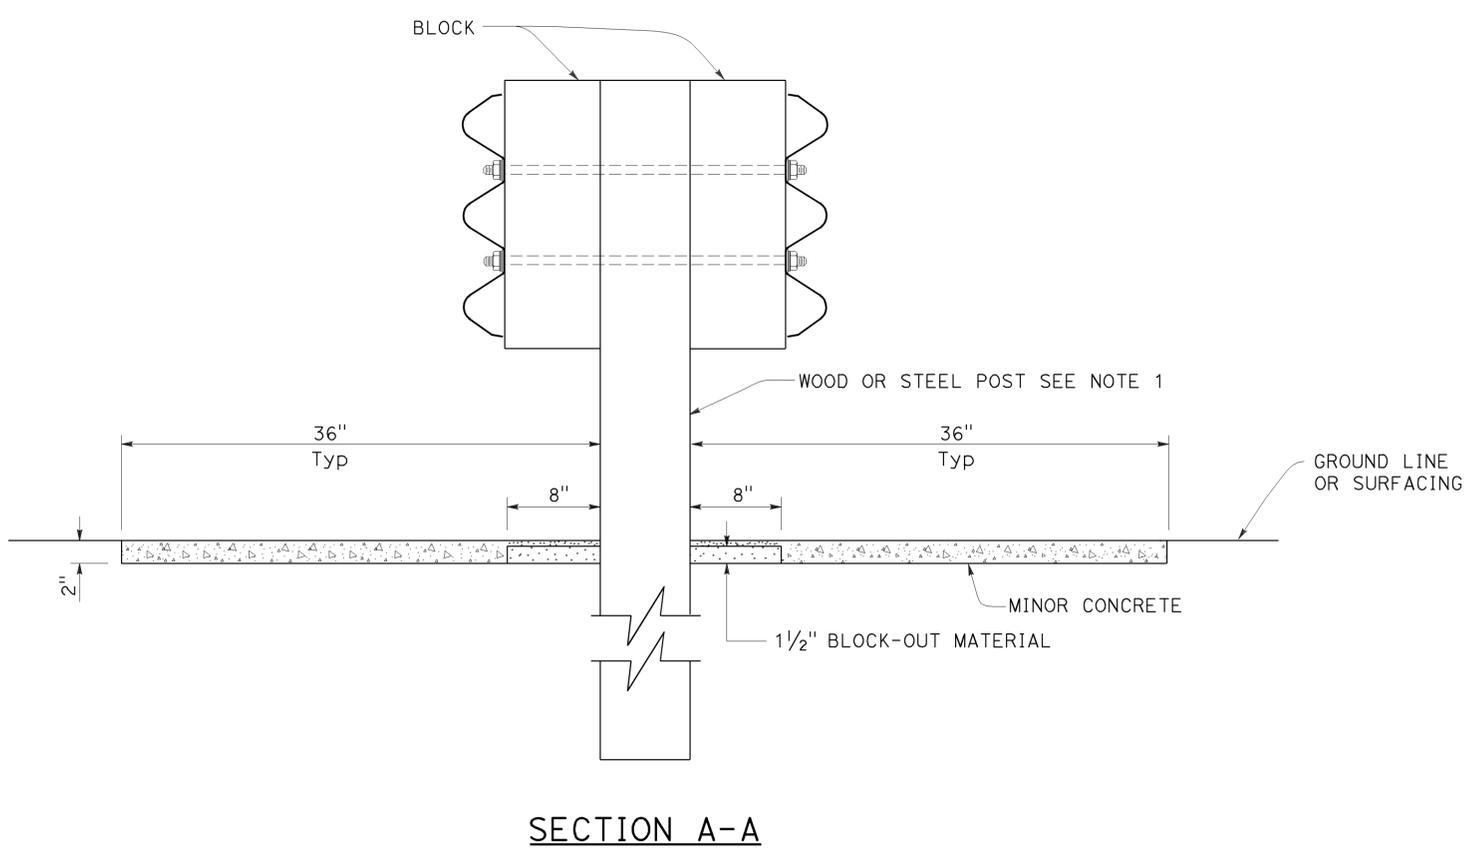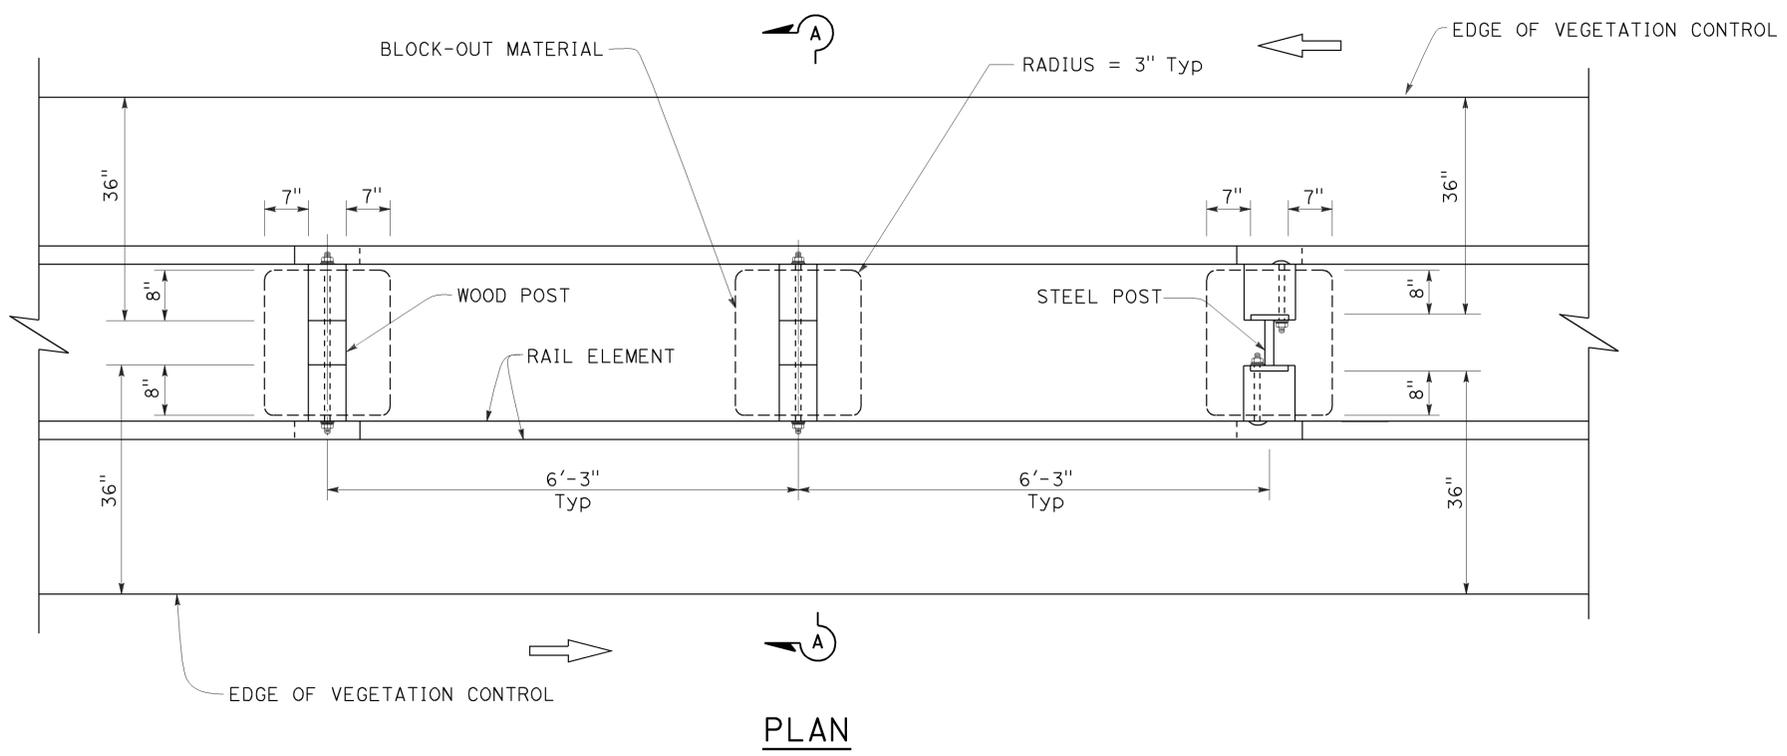

**NOTES:**

1. For wood and steel post sizes, see Standard Plan A78C2.
2. For details not shown, see Standard Plans A78A and A78B.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**DOUBLE THRIE BEAM BARRIER  
TYPICAL VEGETATION CONTROL  
STANDARD BARRIER RAILING SECTION**

NO SCALE

RSP A78C4 DATED OCTOBER 19, 2012 SUPERSEDES STANDARD PLAN A78C4  
DATED MAY 20, 2011 - PAGE 94 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A78C4**

2010 REVISED STANDARD PLAN RSP A78C4

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	236	265


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

October 19, 2012  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
*Randell D. Hiatt*  
No. C50200  
Exp. 6-30-13  
CIVIL  
STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 6-1-15

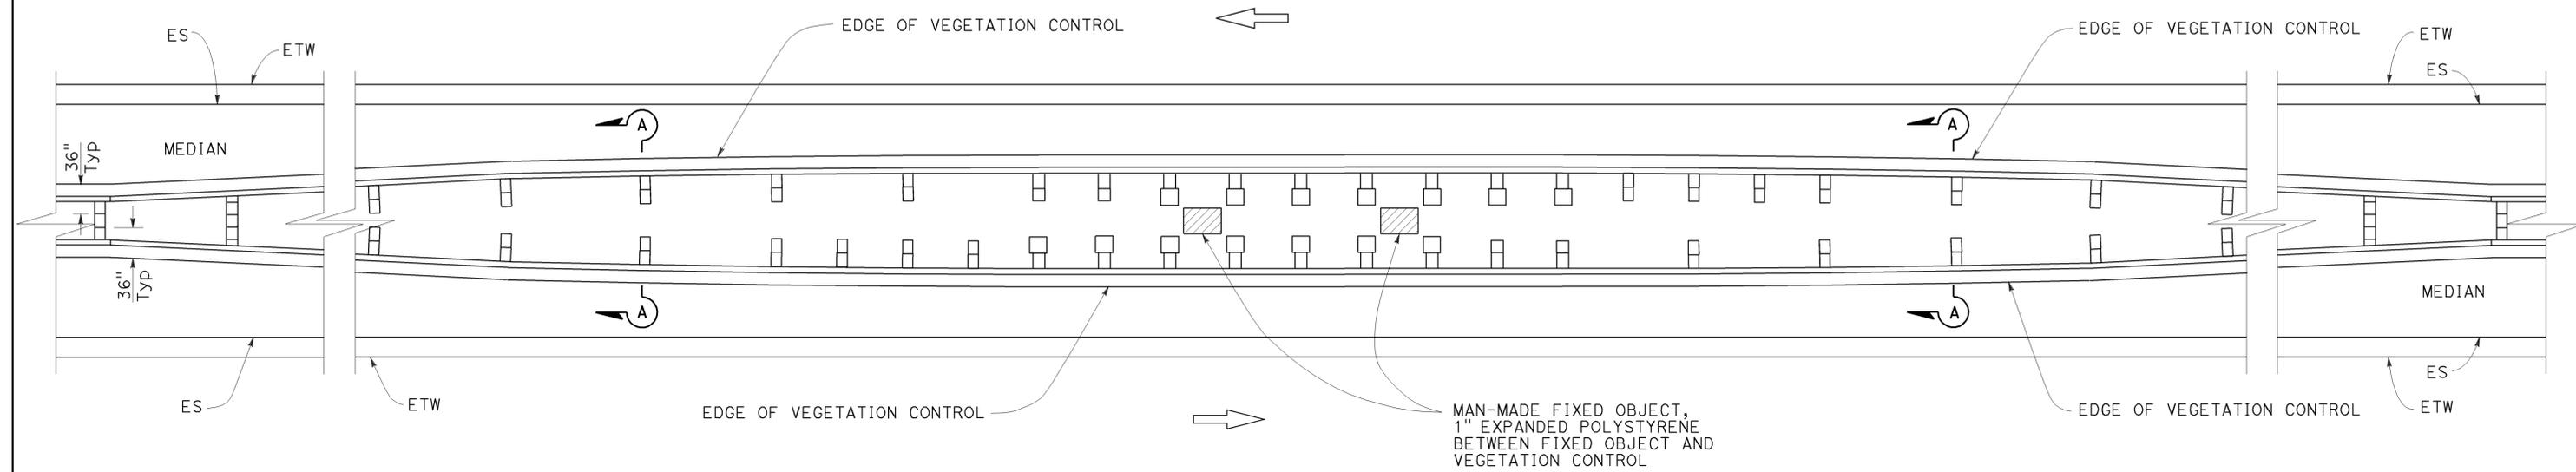

PLAN

NOTES:

1. See Revised Standard Plan RSP A78C3 for additional vegetation control.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

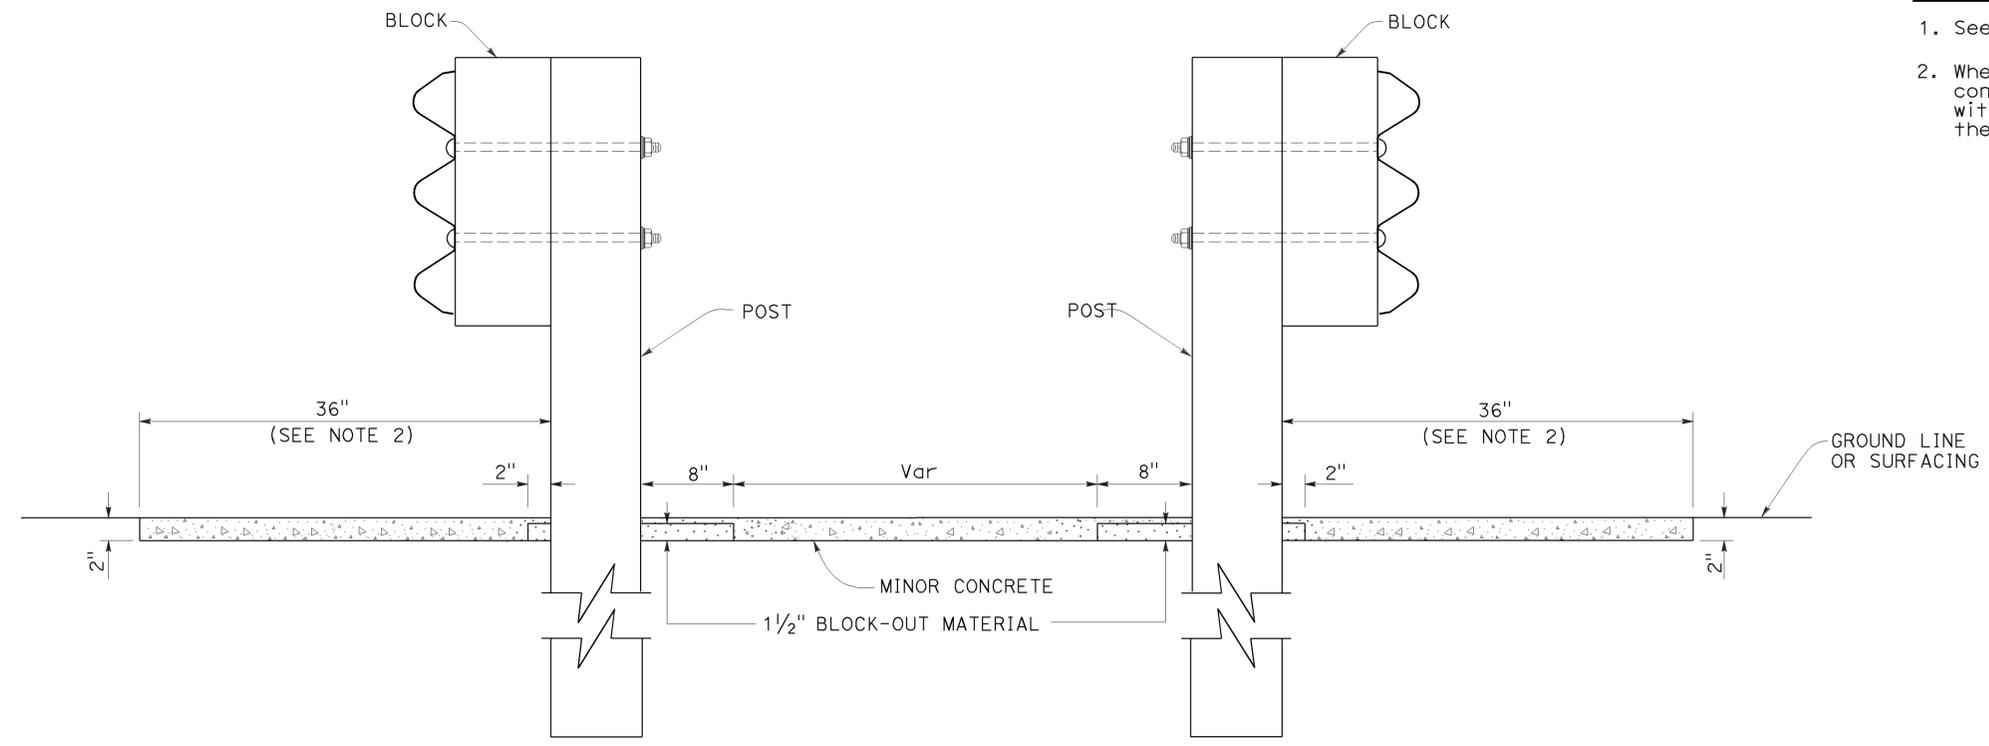

SECTION A-A

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**THRIE BEAM BARRIER  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECTS  
IN MEDIAN**

NO SCALE

RSP A78C5 DATED OCTOBER 19, 2012 SUPERSEDES STANDARD PLAN A78C5  
DATED MAY 20, 2011 - PAGE 95 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A78C5**

2010 REVISED STANDARD PLAN RSP A78C5

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	237	265


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

October 19, 2012  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
*Randell D. Hiatt*  
No. C50200  
Exp. 6-30-13  
CIVIL  
STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 6-1-15

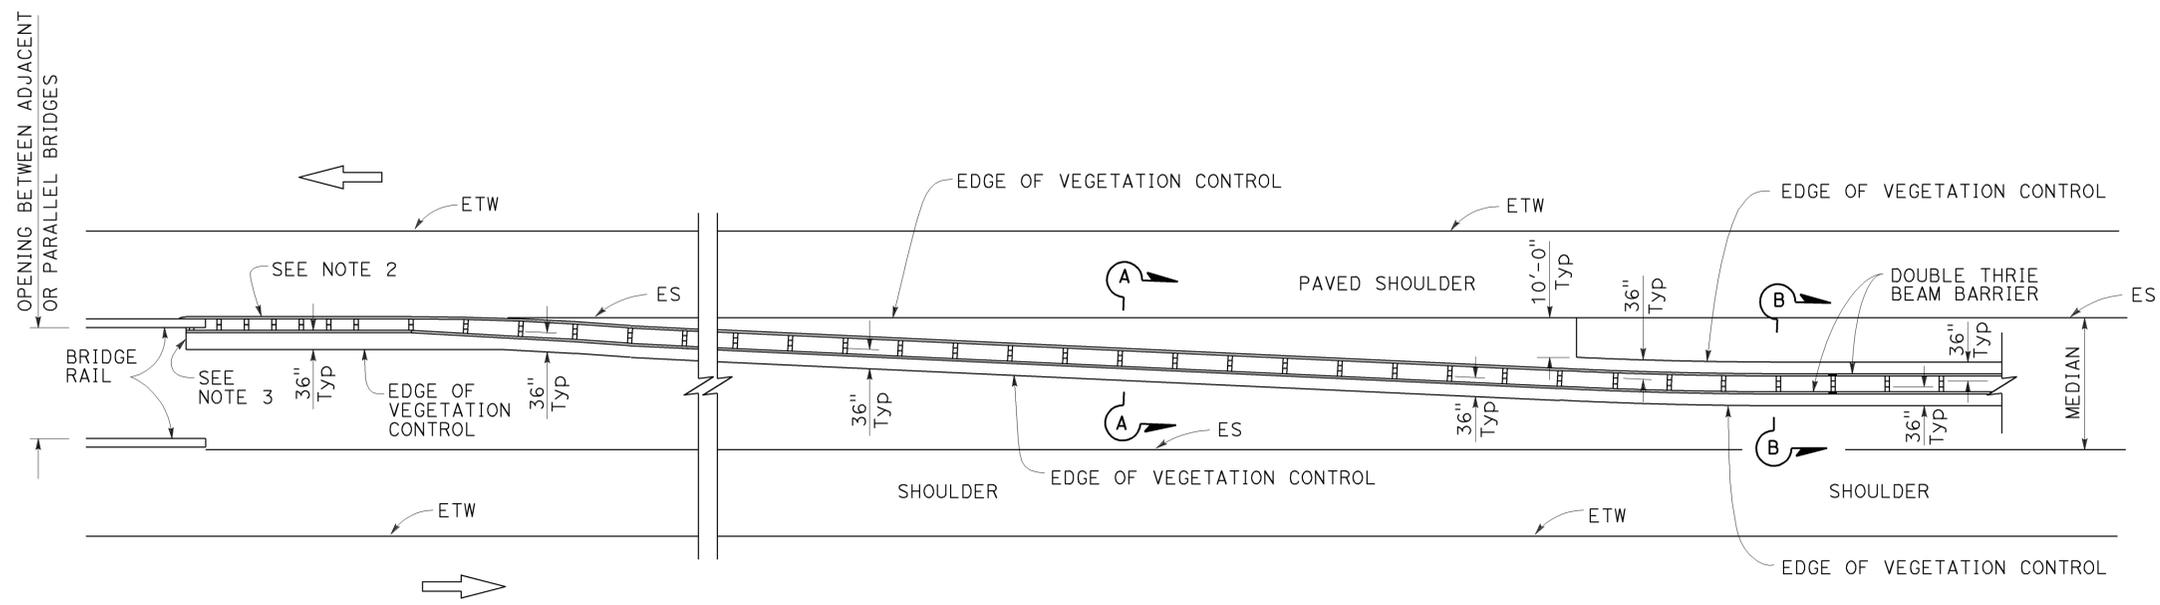


PLAN

NOTES:

1. See Revised Standard Plan RSP A78C4 for additional vegetation control details.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
3. End vegetation control at end of backside rail element attached to bridge railing.

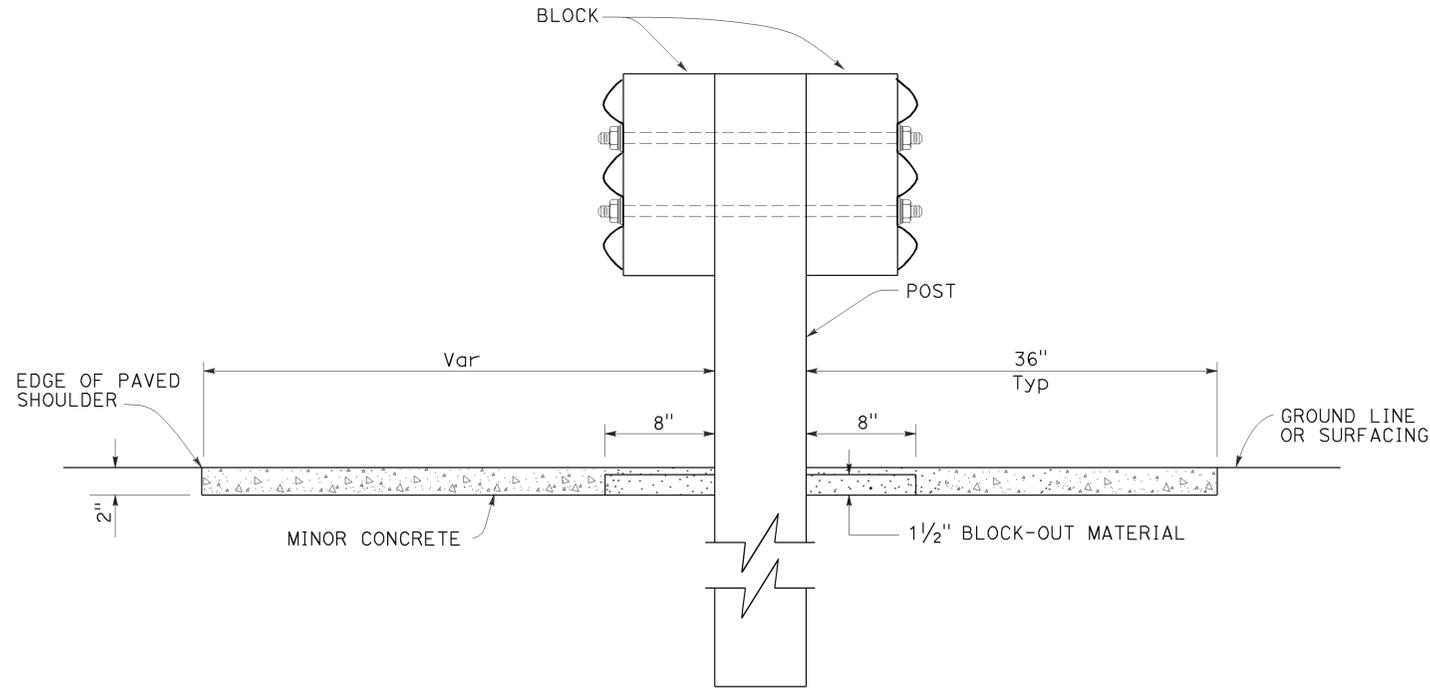

SECTION A-A

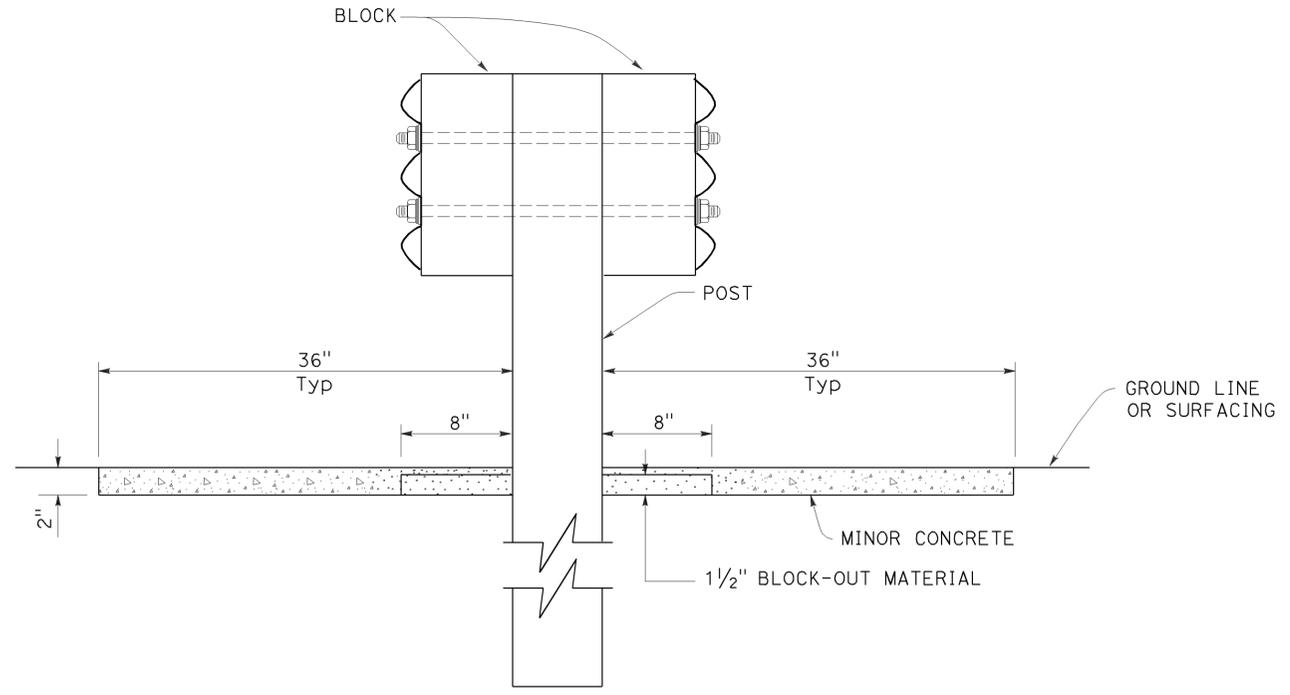

SECTION B-B

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**THRIE BEAM BARRIER  
TYPICAL VEGETATION CONTROL  
AT STRUCTURE APPROACH**



NO SCALE

RSP A78C6 DATED OCTOBER 19, 2012 SUPERSEDES STANDARD PLAN A78C6 DATED MAY 20, 2011 - PAGE 96 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A78C6**


2010 REVISED STANDARD PLAN RSP A78C6

TO ACCOMPANY PLANS DATED 6-1-15

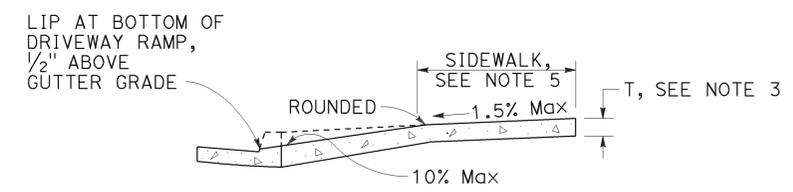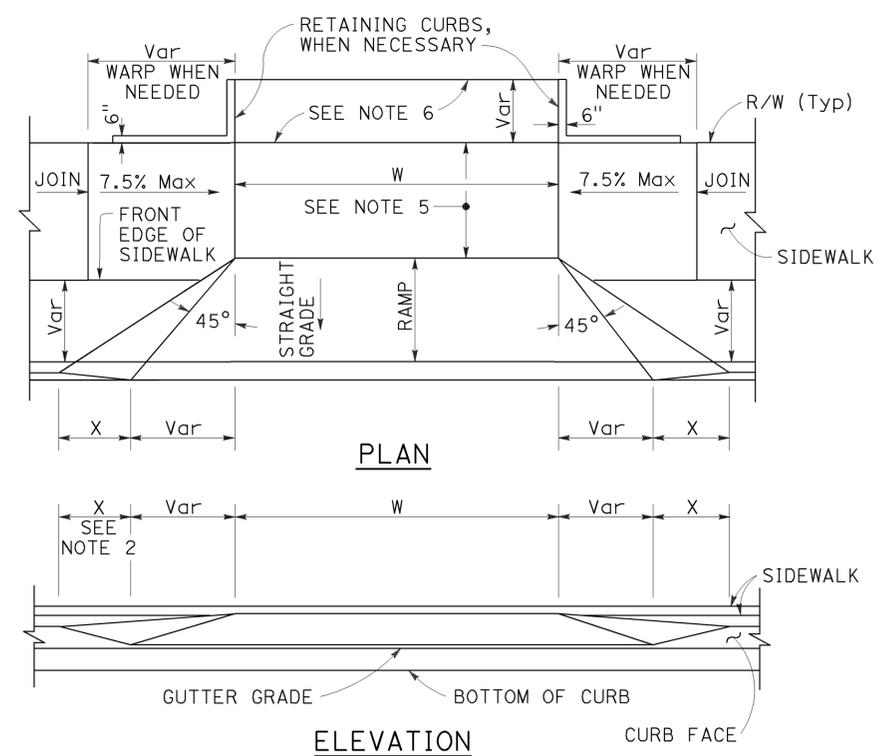

**CASE A**

Typical driveway, sidewalk not depressed

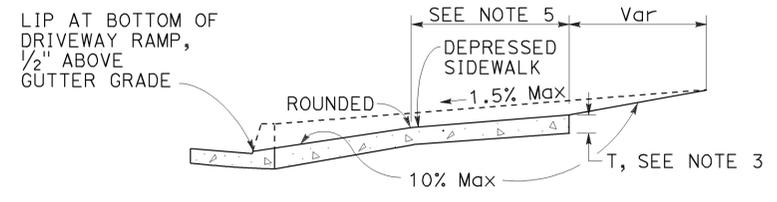

**CASE B**

Driveway with depressed sidewalk

**SECTIONS**


**TABLE A**

CURB TYPE	DIMENSIONS			
	"H1"	"H2"	"W1"	"W2"
A1-6	1'-2"	6"	7 1/2"	1 1/2"
A1-8	1'-4"	8"	8"	2"
A2-6	1'-0"	6"	2'-7 1/2"	1 1/2"
A2-8	1'-2"	8"	2'-8"	2"
A3-6	6"	5"	7 1/4"	1 1/4"
A3-8	8"	7"	7 3/4"	1 3/4"
B1-4	1'-0"	4"	7 1/2"	2 1/2"
B1-6	1'-2"	6"	9"	4"
B2-4	10"	4"	2'-7 1/2"	2 1/2"
B2-6	1'-0"	6"	2'-9"	4"
B3-4	4"	3"	7"	2"
B3-6	6"	5"	8 1/2"	3 1/2"
D-4	10"	4"	1'-6"	1'-1"
D-6	1'-0"	6"	2'-2"	1'-9"


**CURB QUANTITIES**

TYPE	CUBIC YARDS PER LINEAR FOOT
A1-6	0.02585
A1-8	0.03084
A2-6	0.05903
A2-8	0.06379
A3-6	0.01036
A3-8	0.01435
B1-4	0.02185
B1-6	0.02930
B2-4	0.05515
B2-6	0.06171
B3-4	0.00641
B3-6	0.01074
B4	0.05709
D-4	0.04083
D-6	0.06804
E	0.06661


**DRIVEWAYS**




**TYPE A1 CURBS**  
See Table A

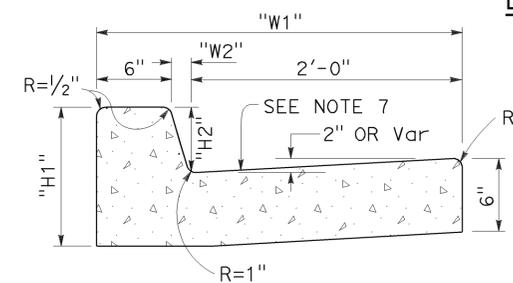


**TYPE A2 CURBS**  
See Table A

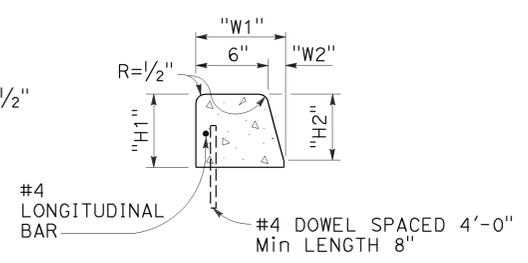


**TYPE A3 CURBS**  
Superimposed on existing pavement  
See Table A

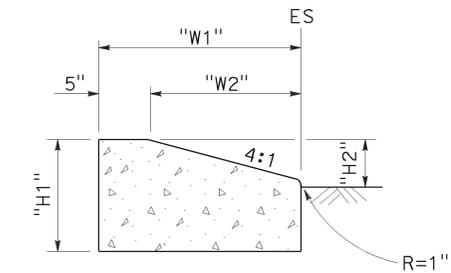


**TYPE D CURBS**  
See Table A

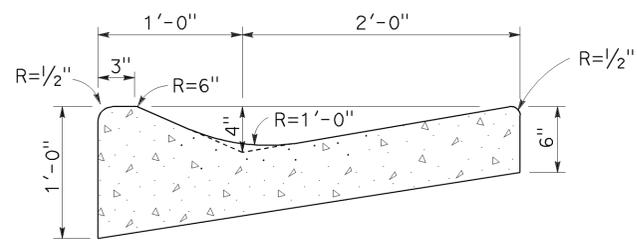


**TYPE E CURB**




**TYPE B1 CURBS**  
See Table A

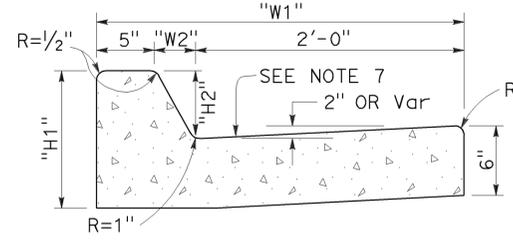


**TYPE B2 CURBS**  
See Table A

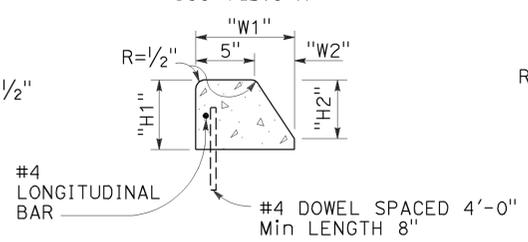

**TYPE B3 CURBS**  
Superimposed on existing pavement  
See Table A

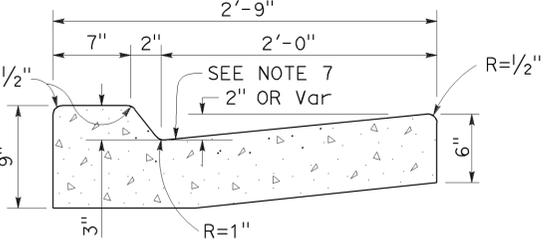

**TYPE B4 CURBS**

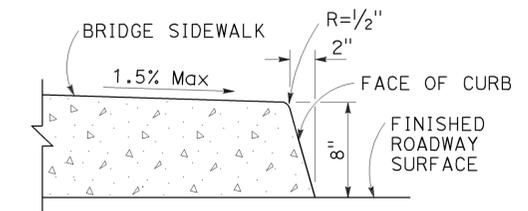

**TYPE H CURB**  
On Bridges

**CURBS**

- NOTES:**
- Case A driveway section typically applies.
  - X=3'-0" except for curb heights over 10" where 4:1 slopes shall be used on curb slope.
  - Sidewalk and ramp thickness "T" at driveway shall be 4" for residential and 6" for commercial.
  - Difference in slope of the driveway ramp and the slope of a line between the gutter and a point on the roadway 5'-0" from gutter line shall not exceed 15%. Reduce driveway ramp slope, not gutter slope, where required.
  - Minimum width of clear passageway for sidewalk shall be 4'-2".
  - Retaining curbs and acquisition of construction easement may be necessary for narrow sidewalks or curb heights in excess of 6".
  - Across the pedestrian route at curb ramp locations, the gutter pan slope shall not exceed 1" of depth for each 2'-0" of width.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


**CURBS AND DRIVEWAYS**

NO SCALE


RSP A87A DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A87A  
DATED MAY 20, 2011 - PAGE 119 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A87A**


2010 REVISED STANDARD PLAN RSP A87A




TO ACCOMPANY PLANS DATED 6-1-15

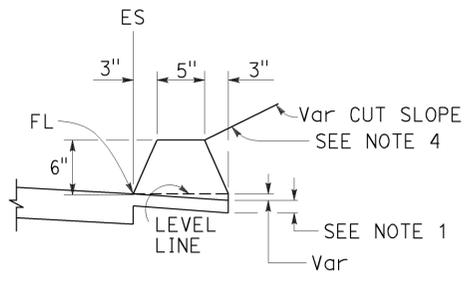


**TYPE A**  
See Note 3

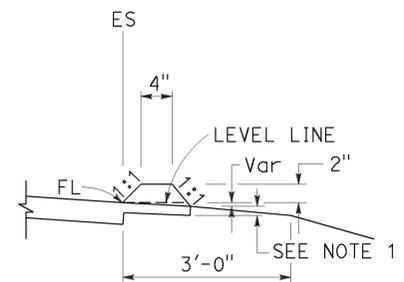


**TYPE C**

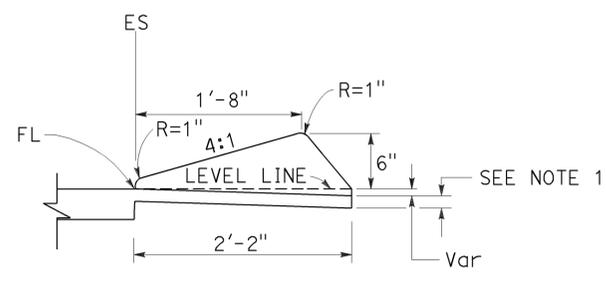

**TYPE D**

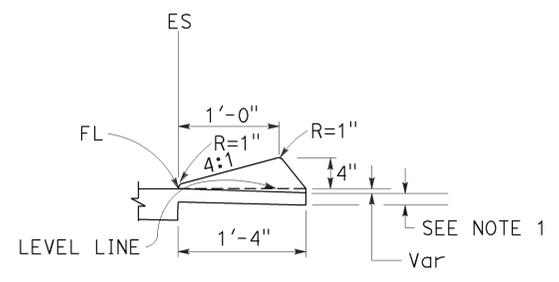


**TYPE E**

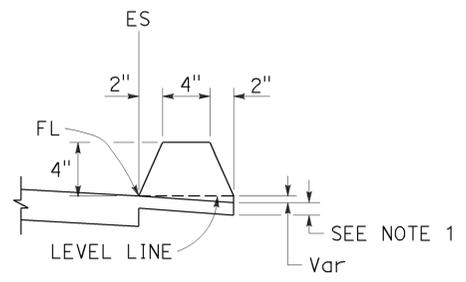


**TYPE F**  
See Note 5


**DIKES**

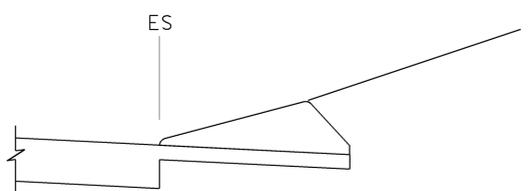


**CASE C-1**  
Cut Slope

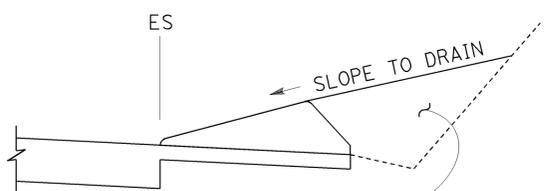

**CASE C-2**  
Cut Slope

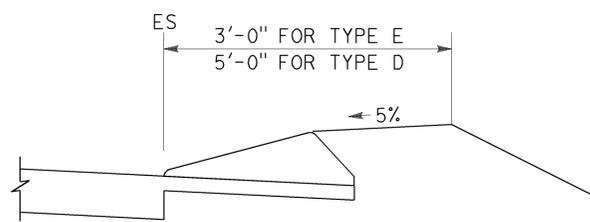

**CASE F**

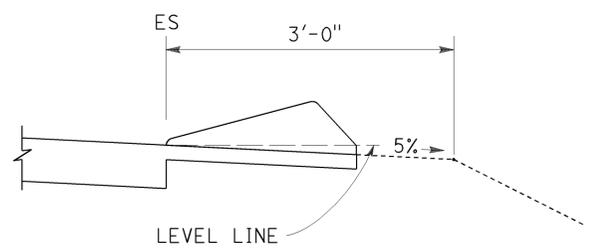

**CASE R**  
See Note 2

**TYPE D AND E BACKFILL DETAILS**

**NOTES:**

1. For HMA shoulders only, extend top layer of HMA placed on the shoulder under dike with no joint at the ES. For projects with OGFC shoulders, do not extend OGFC under dike. See project plans for modified dike detail.
2. Case R applies to retrofit only projects where restrictive conditions do not provide enough width for Case F backfill.
3. Type A dike only to be used where restrictive slope conditions do not provide enough width to use Type D or Type E dike.
4. Fill and compact with excavated material to top of dike.
5. Use Type F dike, where dike is required with guard railing installations. See Revised Standard Plan RSP A77N4 for dike positioning details.

**DIKE QUANTITIES**

TYPE	CUBIC YARDS PER LINEAR FOOT
A	0.0135
C	0.0038
D	0.0293
E	0.0130
F	0.0066

Quantities based on 5% cross slope.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**HOT MIX ASPHALT DIKES**

NO SCALE

RSP A87B DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A87B  
DATED MAY 20, 2011 - PAGE 120 OF THE STANDARD PLANS BOOK DATED 2010.


**REVISED STANDARD PLAN RSP A87B**

2010 REVISED STANDARD PLAN RSP A87B

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	240	265

William K. Farnbach  
 REGISTERED CIVIL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
 William K. Farnbach  
 No. C49042  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA

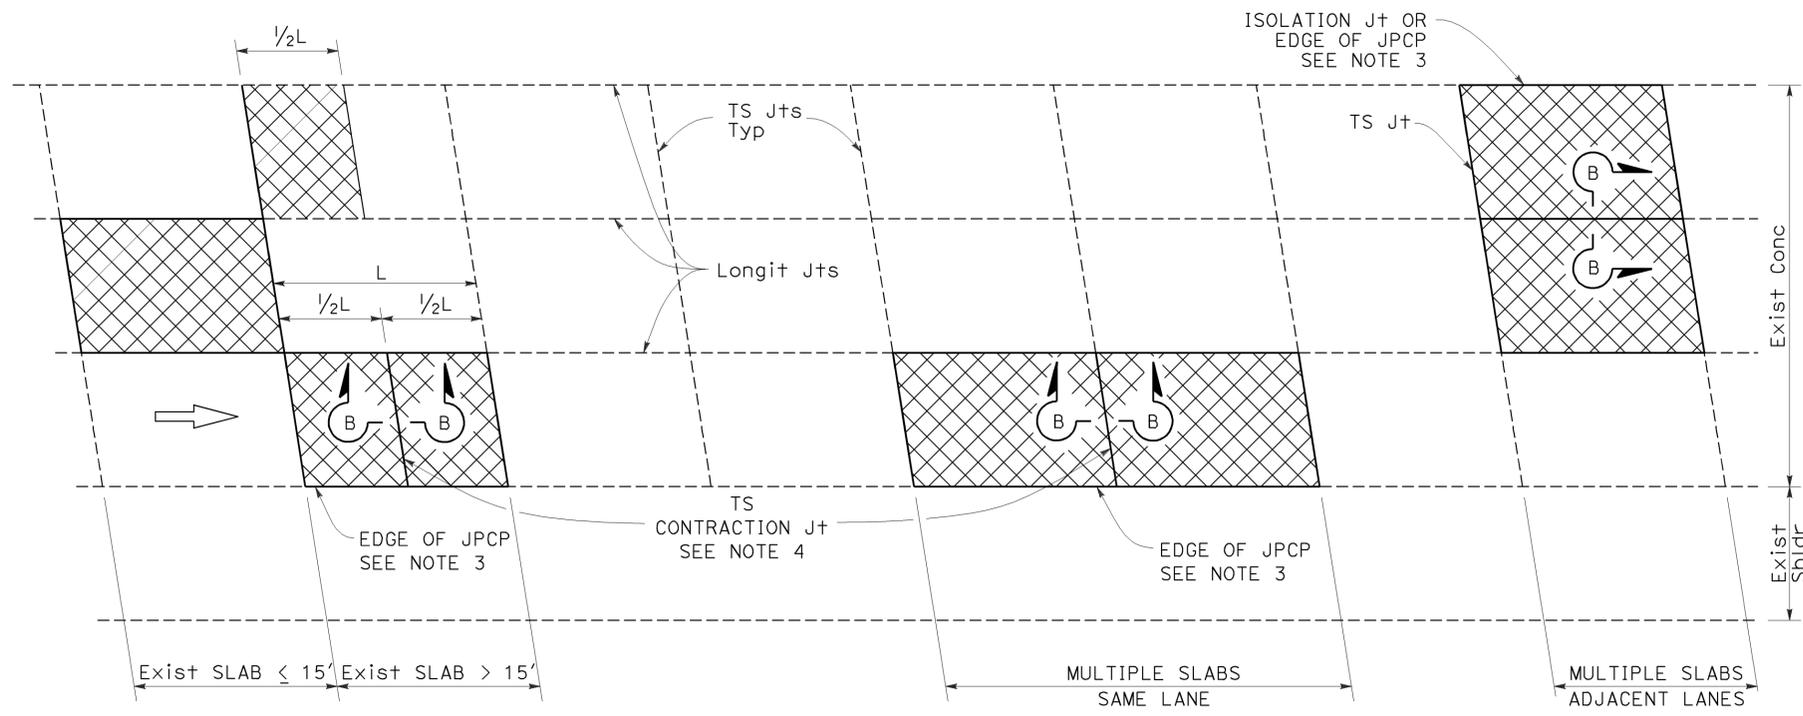

**PLAN**

**LEGEND:**


- RSC RAPID STRENGTH CONCRETE
- INDIVIDUAL SLAB REPLACEMENT WITH RSC

**NOTES:**


1. For details not shown, see Revised Standard Plan RSP P10.
2. Where the existing outside shoulder is asphalt concrete pavement, "a" = 1'-0" and "b" = 2'-0".
3. Use side forms where edge of RSC pavement is adjacent to asphalt concrete.
4. Transverse contraction joint to match skew of existing joint. Omit dowel bars.
5. Do not place tie bars at longitudinal joints.

**DESIGN NOTES:**


1. For concrete slab repair with at least 5 years design life.
2. For short term repairs < 5 yrs design life or for slab replacements with cracking and seating.

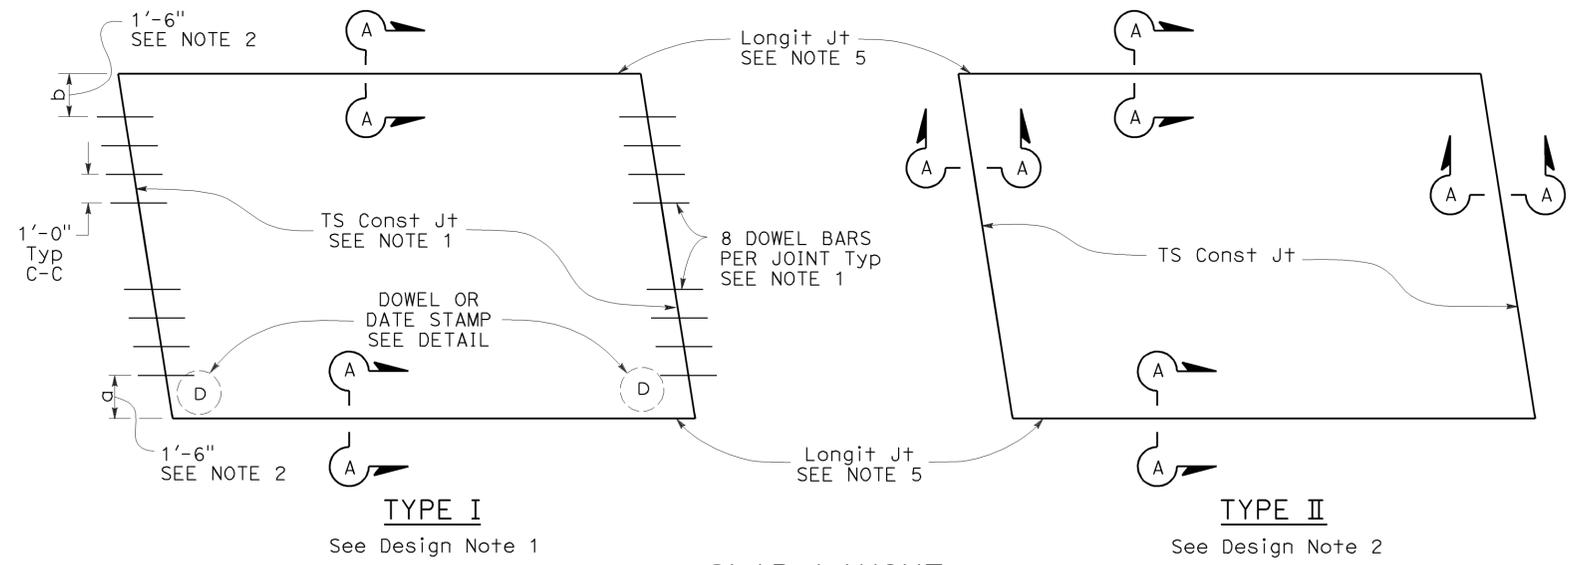


**SLAB LAYOUT**

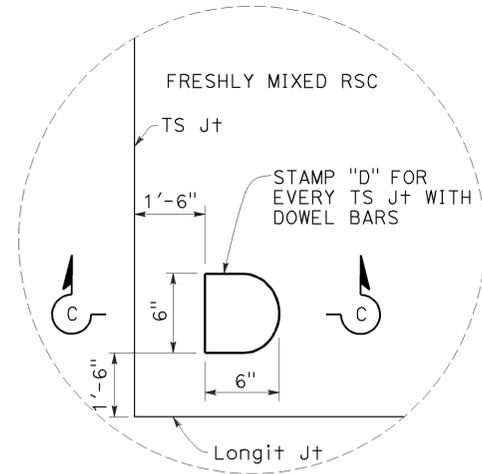


**DOWEL STAMP DETAIL**

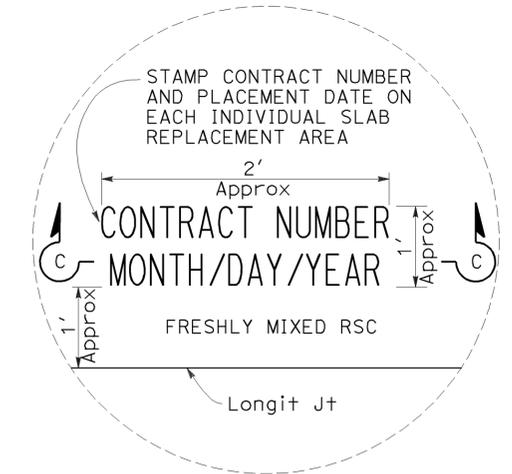


**DATE STAMP DETAIL**

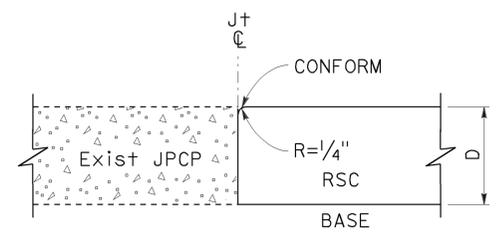

**SECTION A-A**

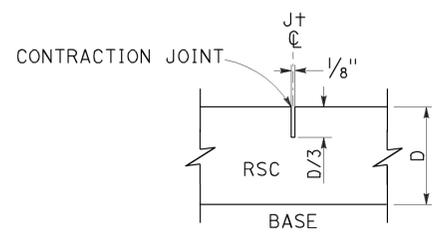

**SECTION B-B**

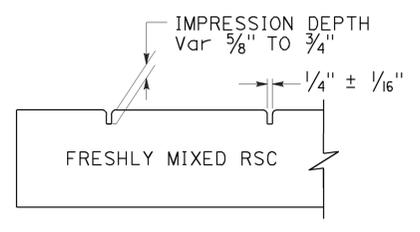

**SECTION C-C**

**INDIVIDUAL SLAB REPLACEMENT WITH RAPID STRENGTH CONCRETE**

NO SCALE


RSP P8 DATED JULY 19, 2013 SUPERSEDES RSP P8 DATED APRIL 20, 2012 AND STANDARD PLAN P8 DATED MAY 20, 2011 - PAGE 130 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP P8**


2010 REVISED STANDARD PLAN RSP P8

TO ACCOMPANY PLANS DATED 6-1-15


- NOTES:**
- See Revised Standard Plan RSP P1 for typical dowel bar placement and locations.
  - Where fresh concrete pavement is placed against new concrete or existing concrete pavement, rounding the corner of the existing concrete pavement is not required.
  - May also use 3/4" Dia dowel bars 2'-4" ± 1/4" in length. Center the length of dowel bars at the centerline of longitudinal joint.

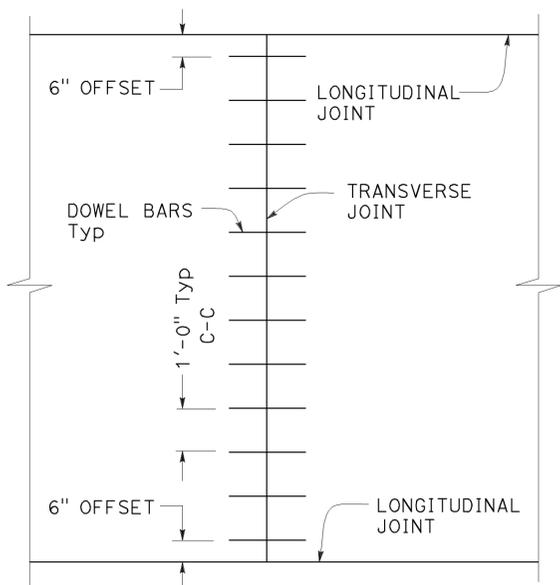


**TRANSVERSE JOINT  
DOWEL BAR LAYOUT**

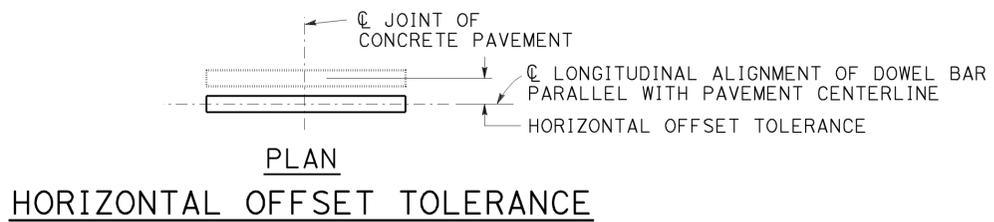


**HORIZONTAL OFFSET TOLERANCE**

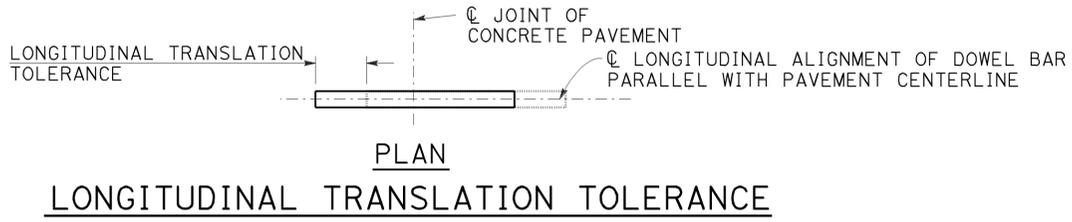

**LONGITUDINAL TRANSLATION TOLERANCE**

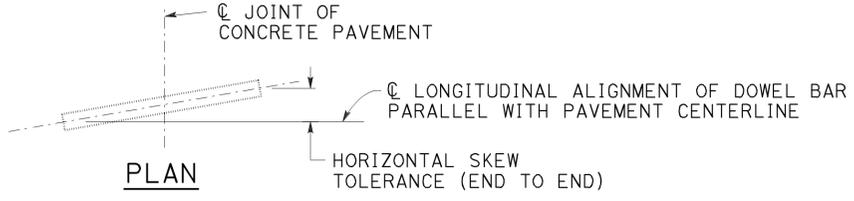


**HORIZONTAL SKEW TOLERANCE**

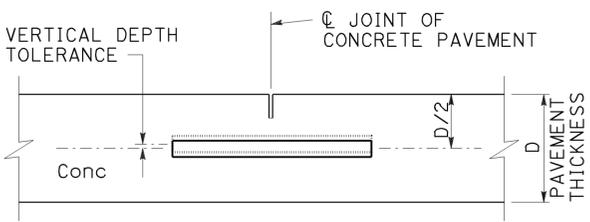


**ELEVATION**

**VERTICAL DEPTH TOLERANCE**

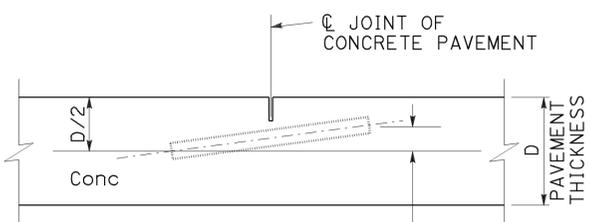


**ELEVATION**


**VERTICAL SKEW TOLERANCE**

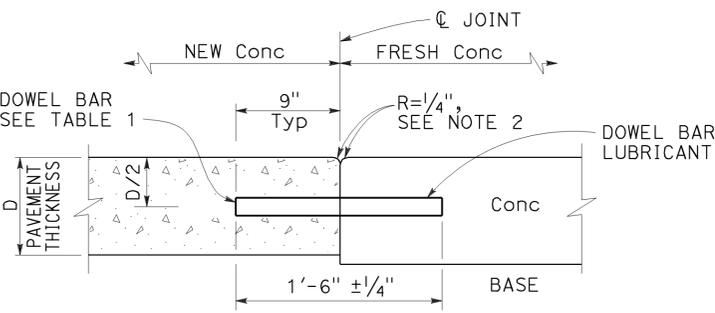

**TRANSVERSE  
CONSTRUCTION JOINT  
DETAIL**

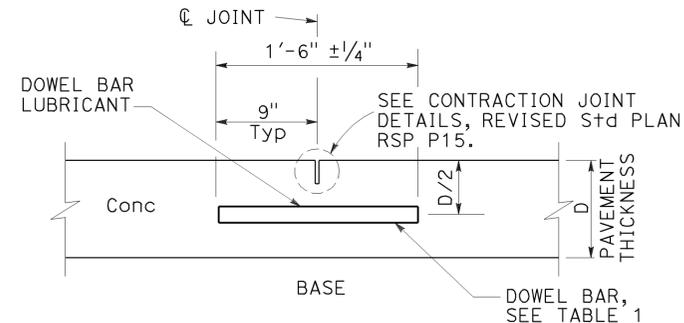

**TRANSVERSE CONTRACTION JOINT**

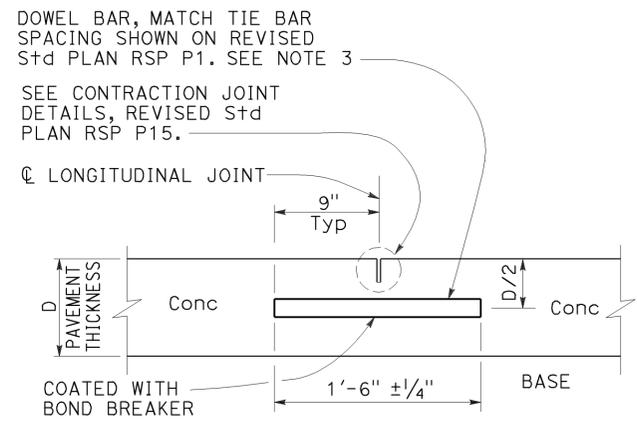


**LONGITUDINAL CONTRACTION  
JOINT WITH DOWEL BARS**

See Revised Std Plan RSP P18


**TABLE 1**  
DOWEL BAR DIAMETER TABLE

PAVEMENT THICKNESS	0.65'	> 0.65' - 0.85'	> 0.85'
MINIMUM DOWEL * BAR DIAMETER	1"	1 1/4"	1 1/2"

\* The drilled hole diameter must be 1/8" to 3/16" larger than the bar diameter.

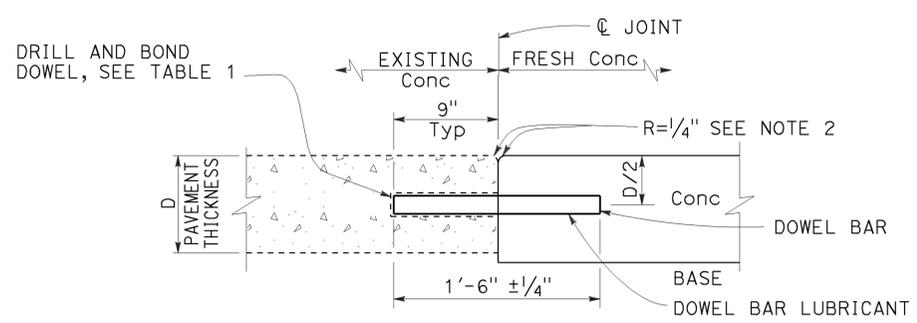

**TRANSVERSE CONSTRUCTION JOINT  
FOR EXISTING CONCRETE PAVEMENT**

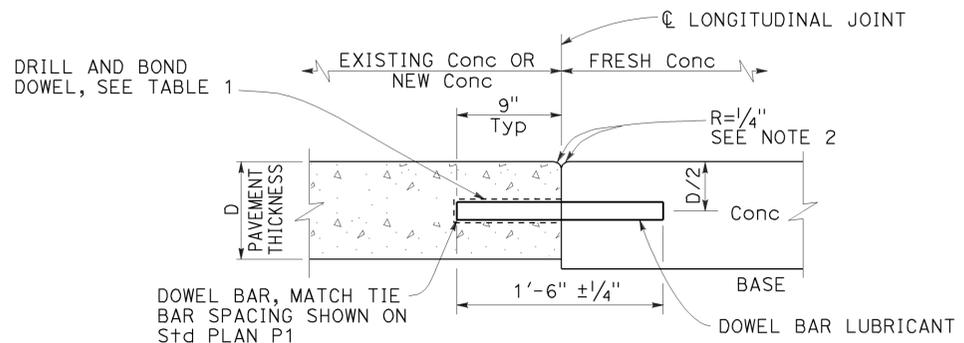

**LONGITUDINAL CONSTRUCTION JOINT  
WITH DOWEL BARS**

See Revised Std Plan RSP P18

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**CONCRETE PAVEMENT  
DOWEL BAR  
DETAILS**

NO SCALE

RSP P10 DATED JULY 19, 2013 SUPERSEDES RSP P10 DATED APRIL 20, 2012 AND STANDARD PLAN P10 DATED MAY 20, 2011 - PAGE 131 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP P10**

2010 REVISED STANDARD PLAN RSP P10


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	242	265

REGISTERED CIVIL ENGINEER  
 November 15, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER  
 Cornelis M. Hakim  
 No. C55610  
 Exp. 12-31-14  
 CIVIL  
 STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 6-1-15


**ABBREVIATIONS:**  
SE SAFETY EDGE

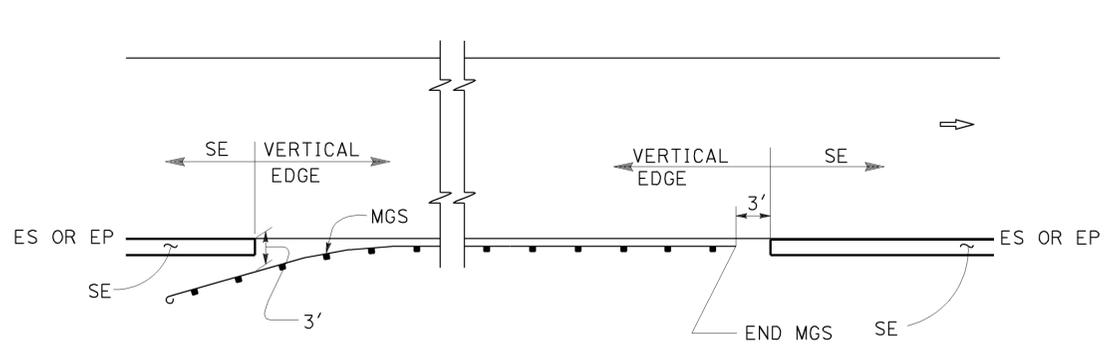


**MGS**

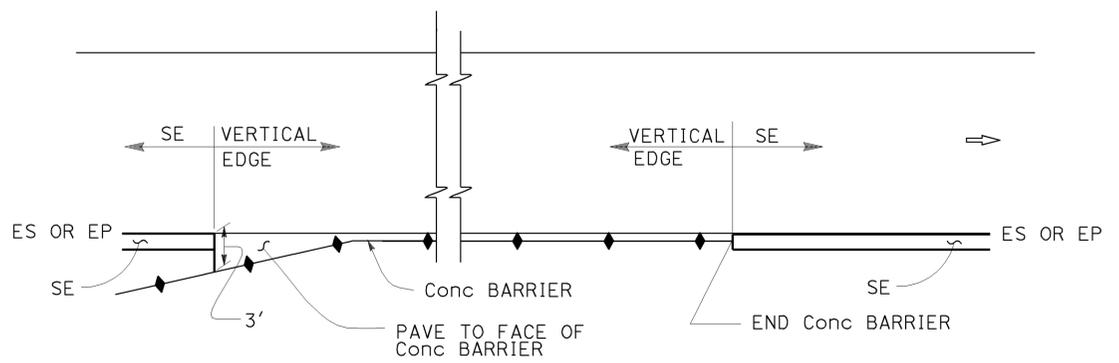


**CONCRETE BARRIER**

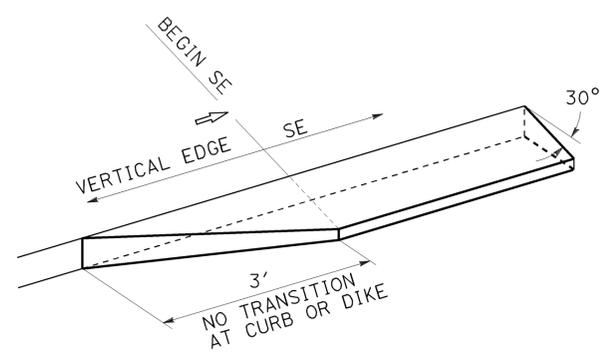

**TRANSITION DETAIL FOR CONCRETE ONLY**

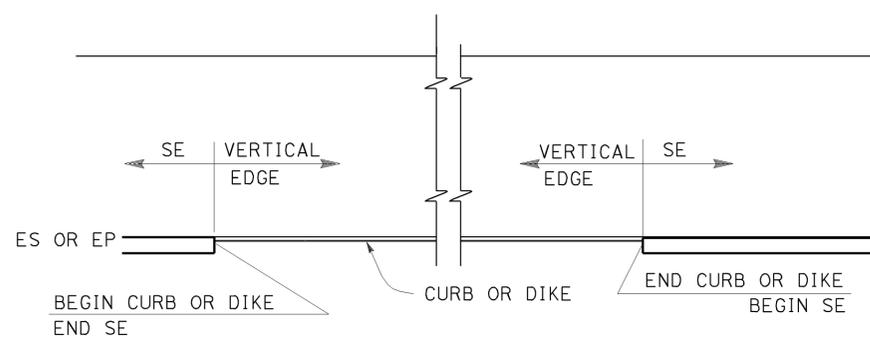


**CURB OR DIKE**

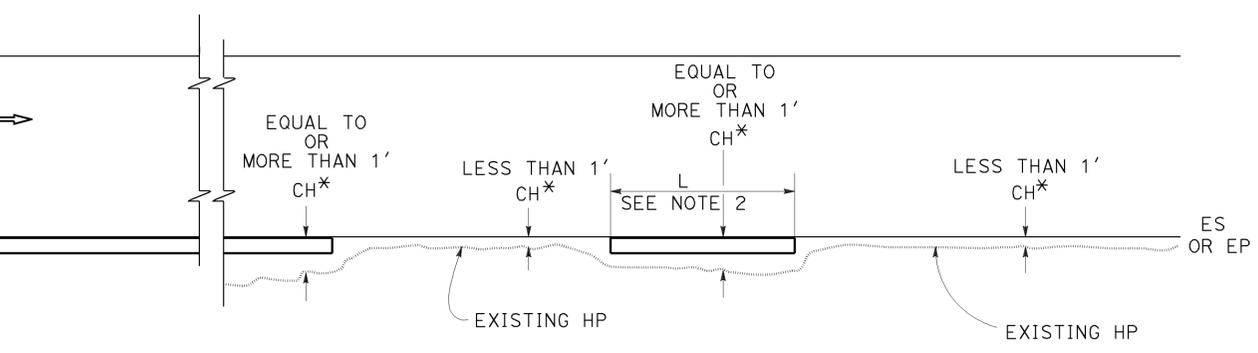


**NARROW SIDE SLOPE**

\* CH = Distance from ES or EP to existing HP.

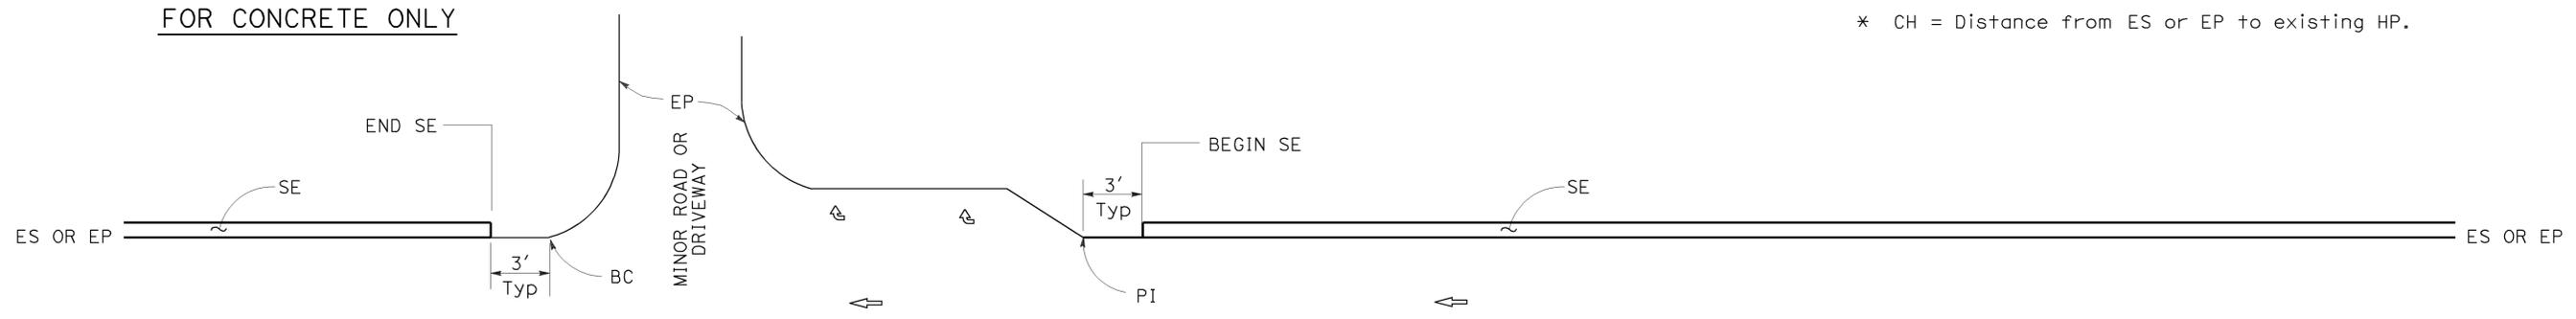

**STATE ROUTE**

**STATE ROUTE**

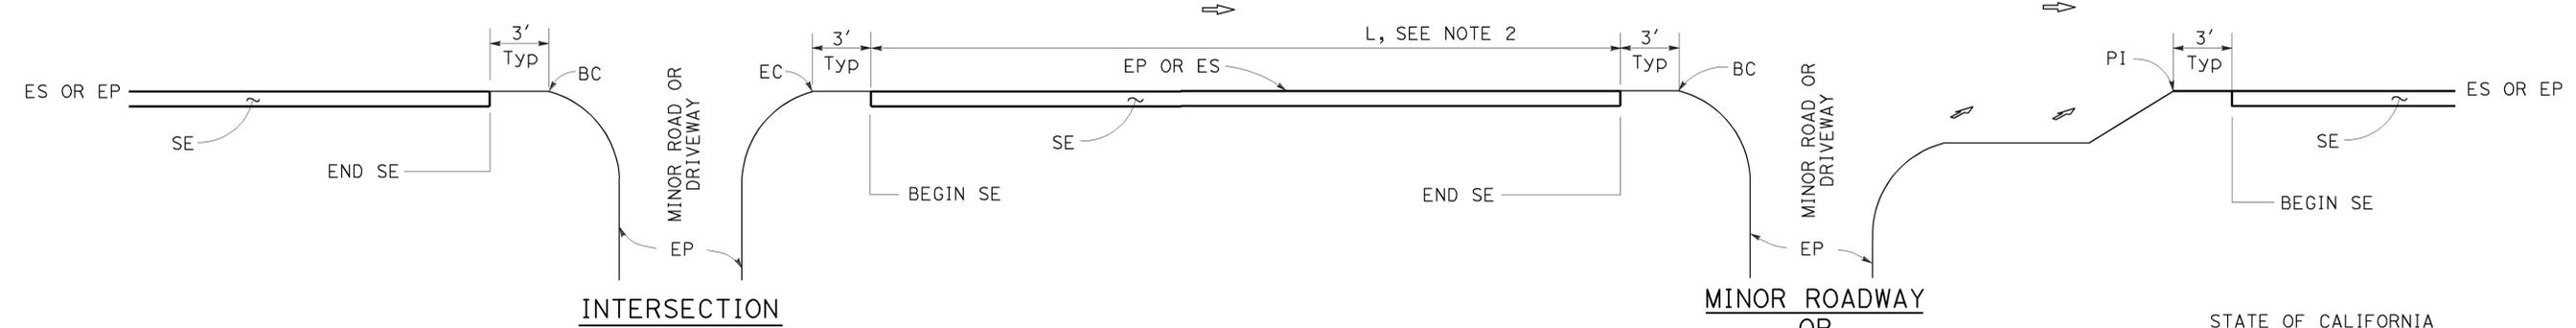

**INTERSECTION**

**DRIVEWAY AND INTERSECTION**

**MINOR ROADWAY OR DRIVEWAY**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**PAVEMENT EDGE TREATMENTS**

NO SCALE


- NOTES:**
1. For details not shown, see Revised Standard Plans RSP P75 and RSP P76.
  2. Safety edge is optional when L is less than 30'.

RSP P74 DATED NOVEMBER 15, 2013 SUPERSEDES RSP P74 DATED JANUARY 20, 2012 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.


**REVISED STANDARD PLAN RSP P74**

2010 REVISED STANDARD PLAN RSP P74


2010 REVISED STANDARD PLAN RSP P75

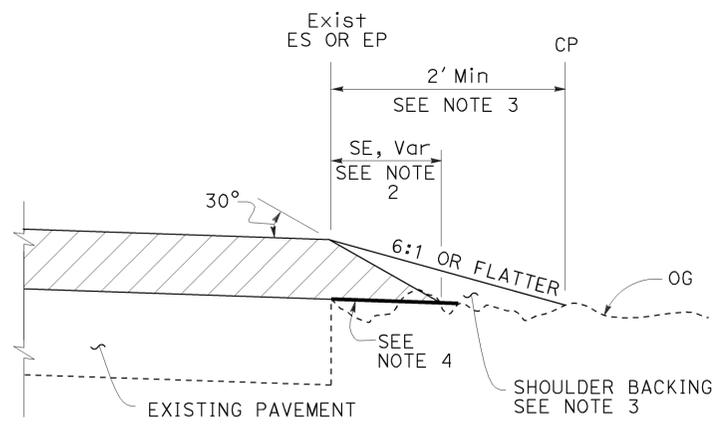


**CASE A**  
Safety Edge

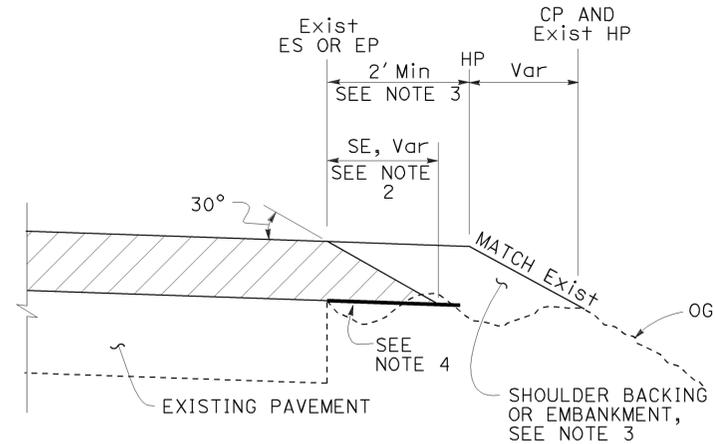


**CASE B**  
Safety Edge

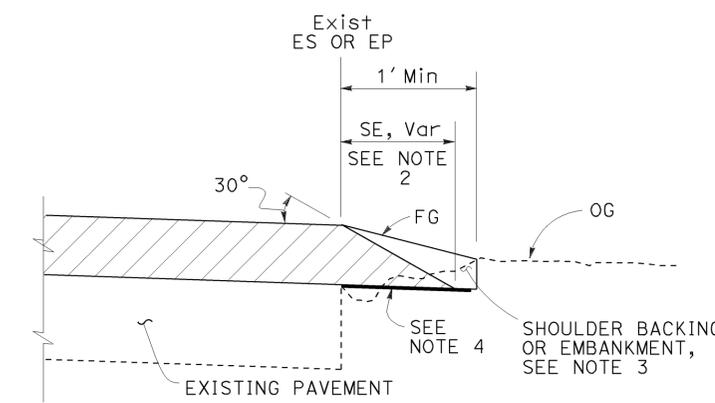


**CASE C**  
Safety Edge

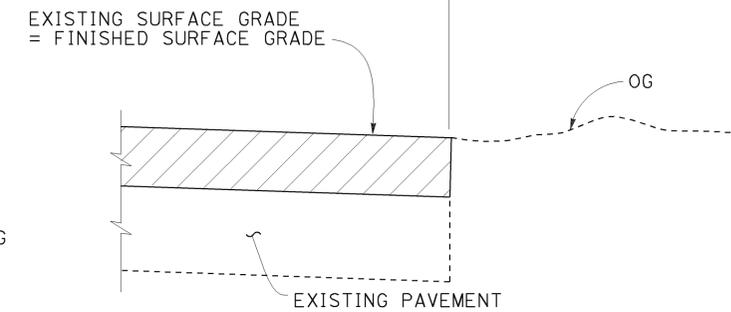

**CASE D**  
Vertical Edge

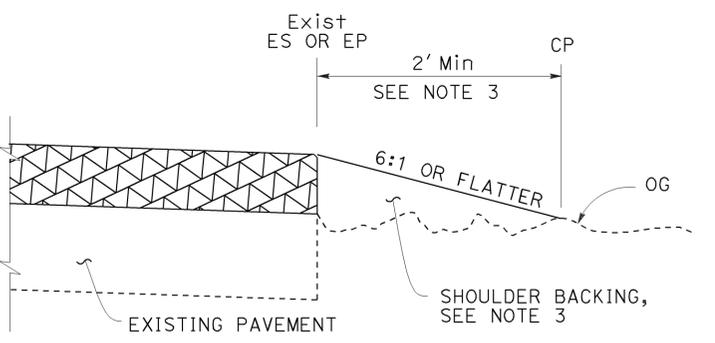

**CASE E**  
Vertical Edge

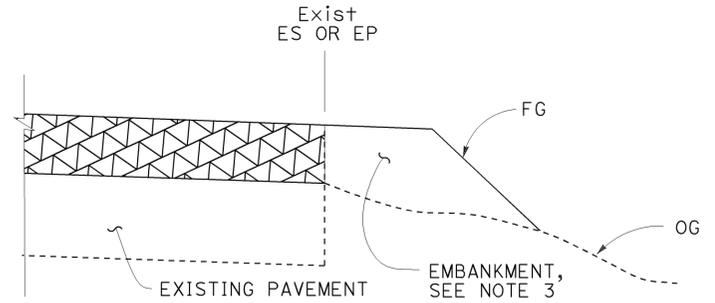

**CASE F**  
Vertical Edge  
\* See Table A and Revised Std Plan RSP P74

- NOTES:**
1. For limits of safety edge and vertical edge treatments, see Revised Standard Plan RSP P74.
  2. Details shown for HMA overlay thickness less than 0.43'. See Detail "A" for HMA overlay thickness more than 0.43' or concrete overlay.
  3. For locations and limits of shoulder backing or embankment see project plans.
  4. Grade existing ground to place safety edge. 1' minimum width
  5. Safety edge transverse joint must match overlay transverse joint. End of #6 longitudinal bar must be 2" ± 1/2" clear from transverse joint.
  6. Safety edge is not needed in the area of MGS, barrier, right turn lane and acceleration lane. See Revised Standard Plan RSP P74.

**LEGEND:**

- HMA OVERLAY
- HMA OR CONCRETE OVERLAY
- CONCRETE OVERLAY

**ABBREVIATIONS:**

SE SAFETY EDGE  
TT TOTAL THICKNESS OF SE


**TABLE A**  
EDGE TREATMENT FOR VARIOUS OVERLAY THICKNESS AND CONDITIONS

FIELD CONDITION	OVERLAY THICKNESS	
	LESS THAN 0.15'	0.15' OR MORE
Exist SLOPE 6:1 OR FLATTER	CASE E	CASE A
Exist SLOPE 3:1 TO 6:1	CASE E	CASE B
Exist SLOPE STEEPER THAN 3:1	CASE F	CASE F
CUT SECTION (REPLACE, COLD PLANE, MILL PAVEMENT)	CASE D	CASE C


TO ACCOMPANY PLANS DATED 6-1-15  
**ADDITIONAL HMA OR CONCRETE QUANTITIES FOR SE/SIDE/MILE**

TYPICAL CROSS SECTION	TT	TOTAL ADDITIONAL MATERIAL FOR SE/SIDE/MILE		
		HMA (TON)	CONCRETE (CY)*	CONCRETE (CY)**
	0.15'	NA	NA	NA
	0.20'	13.7	NA	NA
	0.30'	30.9	NA	NA
	0.40'	54.9	NA	NA
	0.45'	69.4	NA	NA
	0.50'	84.2	NA	NA
	0.60'	113.9	NA	NA
	0.70'	143.6	70.9	94.2
	0.80'	173.3	85.6	112.2
	0.90'	203.0	100.3	130.2
	1.00'	232.7	114.9	148.2
	1.10'	262.4	129.6	166.2
1.20'	292.1	144.3	184.2	

\* For Detail "A"  
\*\* For Optional Detail "A"

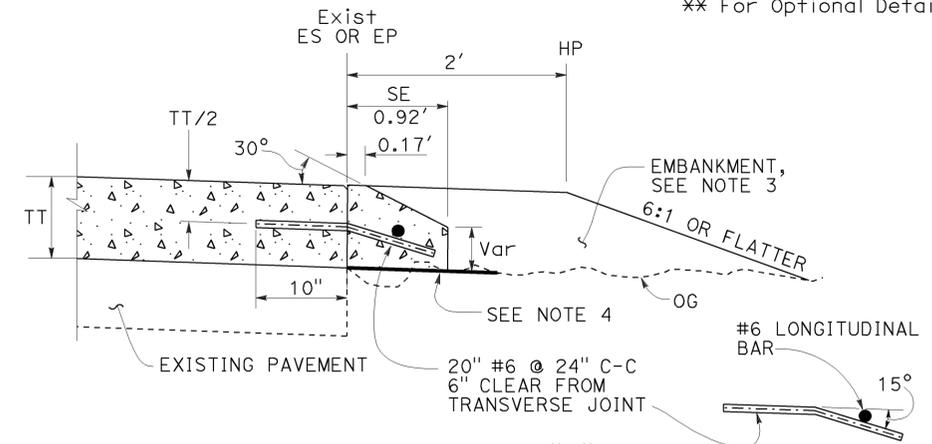

**OPTIONAL DETAIL "A"**  
For concrete overlay  
See Note 5

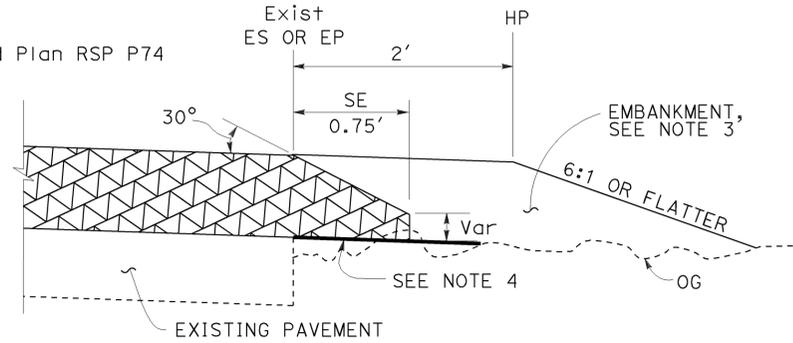

**DETAIL "A"**  
For HMA overlay thickness more than 0.43' or concrete overlay

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**PAVEMENT EDGE TREATMENTS - OVERLAYS**  
NO SCALE

RSP P75 DATED NOVEMBER 15, 2013 SUPERSEDES RSP P75 DATED JANUARY 20, 2012 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	244	265

 REGISTERED CIVIL ENGINEER		
November 15, 2013 PLANS APPROVAL DATE		
<small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>		


**LEGEND:**

-  HMA PAVEMENT
-  HMA OR CONCRETE PAVEMENT
-  CONCRETE PAVEMENT


**ABBREVIATIONS:**

- SE SAFETY EDGE
- TT TOTAL THICKNESS OF SE
- HW HINGE WIDTH, DISTANCE FROM ES OR EP TO HP


TO ACCOMPANY PLANS DATED 6-1-15

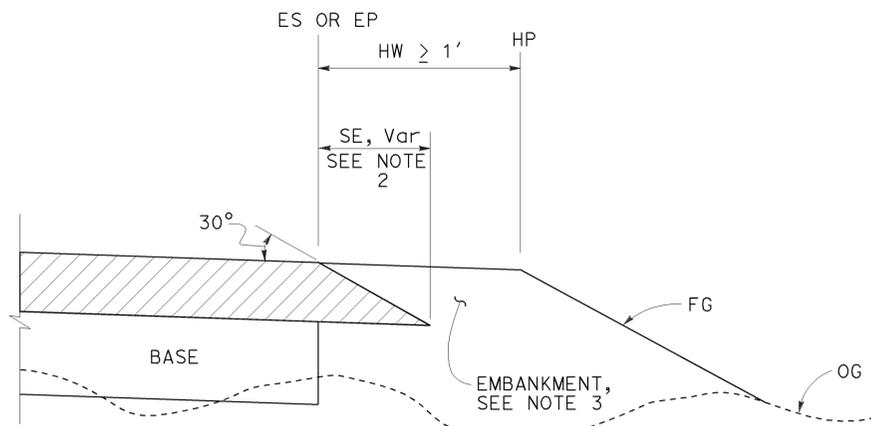


**CASE K**  
Safety Edge - Fill Section, HW  $\geq 1'$

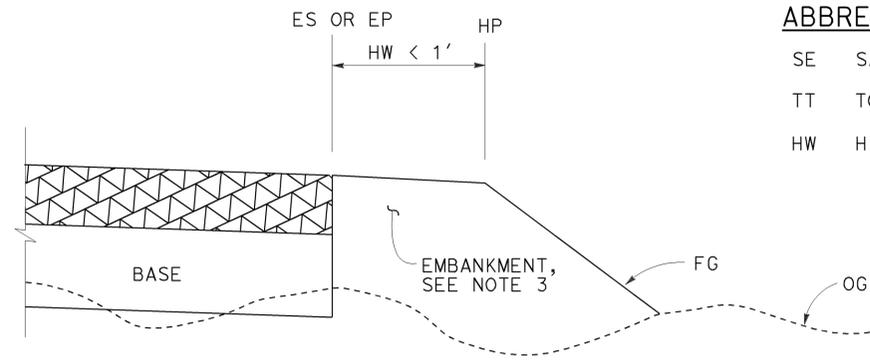


**CASE L**  
Vertical Edge - Fill Section, HW  $< 1'$

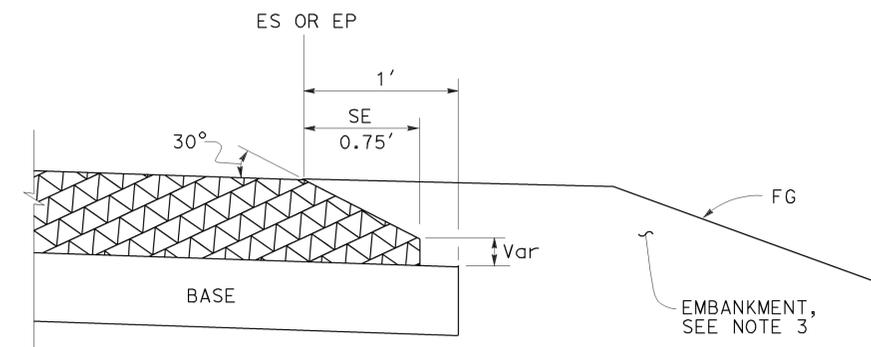


**DETAIL "B"**  
For HMA pavement thickness more than 0.43' or concrete pavement

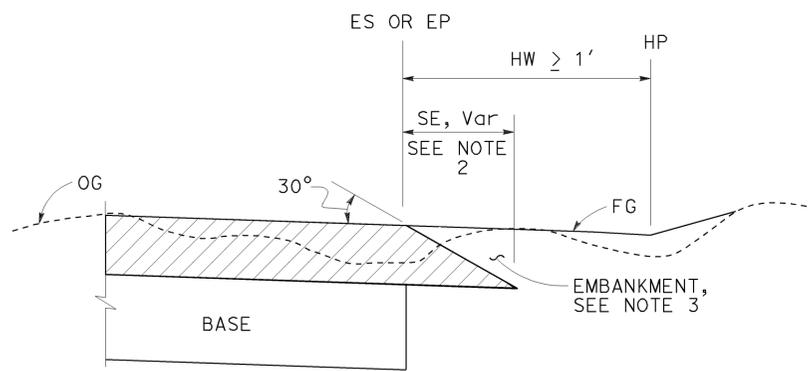

**CASE M**  
Safety Edge - Cut Section, HW  $\geq 1'$

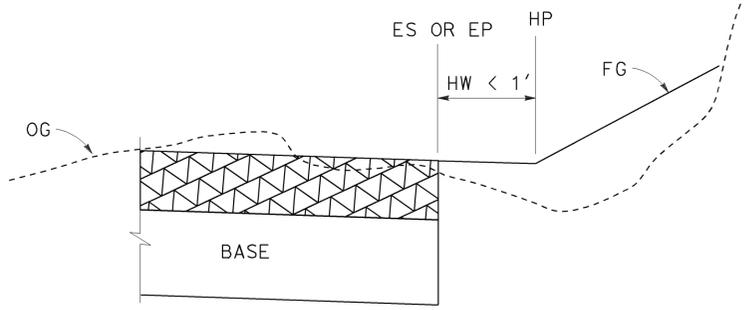

**CASE N**  
Vertical Edge - Cut Section, HW  $< 1'$

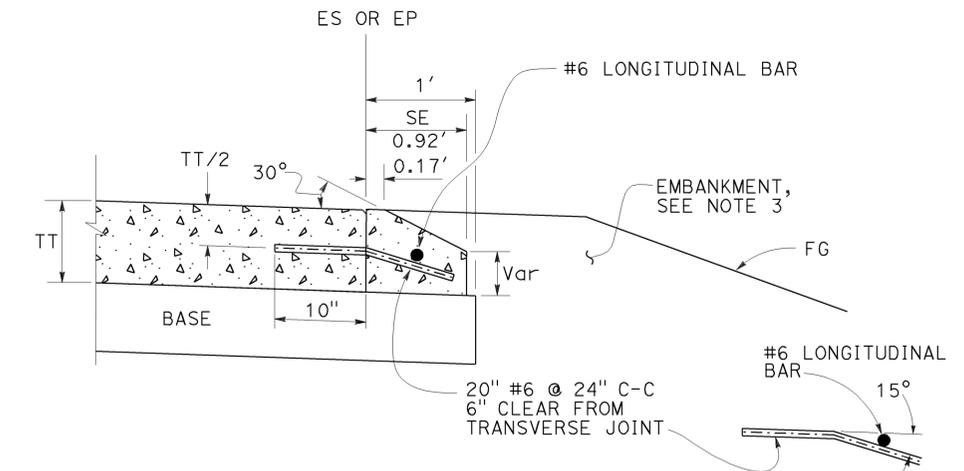

**OPTIONAL DETAIL "B"**  
For concrete pavement  
See Note 4

**FILL SECTION**

**CUT SECTION**

**NOTES:**

- For limits of safety edge and vertical edge treatments, see Revised Standard Plan RSP P74
- Details shown for HMA pavement thickness less than 0.43'. See Detail "B" for HMA pavement thickness more than 0.43' or concrete pavement.
- For locations and limits of embankment see project plans.
- Safety edge transverse joint must match pavement transverse joint. End of #6 longitudinal bar must be 2"  $\pm 1/2$ " clear from transverse joint.
- Safety edge is not needed in the area of MGS, barrier, right turn lane and acceleration lane. See Revised Standard Plan RSP P74.


STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**PAVEMENT EDGE TREATMENTS-  
NEW CONSTRUCTION**  
NO SCALE

RSP P76 DATED NOVEMBER 15, 2013 SUPERSEDES RSP P76 DATED JANUARY 20, 2012 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.  
**REVISED STANDARD PLAN RSP P76**

2010 REVISED STANDARD PLAN RSP P76

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	245	265

*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 July 19, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



**A**

AB AGGREGATE BASE  
 ABS ACRYLONITRILE-BUTADIENE-STYRENE  
 AC ASPHALT CONCRETE  
 ACC ARMOR-CLAD CONDUCTORS  
 Adj ADJACENT/ADJUSTABLE  
 AIC AUXILIARY IRRIGATION CONTROLLER  
 Alt ALTERNATIVE  
 AMEND AMENDMENT  
 ARV AIR RELEASE VALVE  
 AUTO AUTOMATIC  
 AUX AUXILIARY  
 AVB ATMOSPHERIC VACUUM BREAKER

**B**

B&B BALLED AND BURLAPPED  
 B/B BRASS/BRONZE  
 B/B/PL BRASS/BRONZE/PLASTIC  
 B/PL BRASS/PLASTIC  
 BFM BONDED FIBER MATRIX  
 Bit Ctd BITUMINOUS COATED  
 BP BOOSTER PUMP  
 BPA BACKFLOW PREVENTER ASSEMBLY  
 BPE BACKFLOW PREVENTER ENCLOSURE  
 BV BALL VALVE

**C**

C CONDUIT  
 CAP CORRUGATED ALUMINUM PIPE  
 CARV COMBINATION AIR RELEASE VALVE  
 CB COUPLING BAND  
 CCA CAM COUPLER ASSEMBLY  
 CEC CONTROLLER ENCLOSURE CABINET  
 CHDPE CORRUGATED HIGH DENSITY POLYETHYLENE  
 CL CHAIN LINK  
 CNC CONTROL AND NEUTRAL CONDUCTORS  
 Conc CONCRETE  
 CP COPPER PIPE  
 CS COMPOST SOCK  
 CSP CORRUGATED STEEL PIPE  
 CST CENTER STRIP  
 CV CHECK VALVE

**D**

Dia DIAMETER  
 DIP DUCTILE IRON PIPE  
 DIT DRIP IRRIGATION TUBING  
 DG DECOMPOSED GRANITE  
 DN DIAMETER NOMINAL  
 DVA DRIP VALVE ASSEMBLY

**E**

EC EROSION CONTROL  
 ECTC EROSION CONTROL TECHNOLOGY COUNCIL  
 Elect ELECTRIC/ELECTRICAL  
 Elev ELEVATION  
 ELL ELBOW  
 ENCL ENCLOSURE  
 EP EDGE OF PAVEMENT  
 ES EDGE OF SHOULDER  
 EST END STRIP  
 ESTB ESTABLISHMENT  
 ETW EDGE OF TRAVELED WAY

**F**

F FULL CIRCLE  
 F/P FULL/PART CIRCLE  
 FCV FLOW CONTROL VALVE  
 FERT FERTILIZER  
 FG FINISHED GRADE  
 FH FLEXIBLE HOSE  
 FIPT FEMALE IRON PIPE THREAD  
 FIS FERTILIZER INJECTOR SYSTEM  
 FL FLOW LINE  
 FR FIBER ROLL  
 FS FLOW SENSOR  
 FSC FLOW SENSOR CABLE  
 FV FLUSH VALVE

**G**

Galv GALVANIZED  
 GARV GARDEN VALVE  
 GARVA GARDEN VALVE ASSEMBLY  
 GM GRAVEL MULCH  
 GPH GALLONS PER HOUR  
 GPM GALLONS PER MINUTE  
 GSP GALVANIZED STEEL PIPE  
 GV GATE VALVE

**H**

H HALF CIRCLE  
 HDPE HIGH DENSITY POLYETHYLENE  
 HP HORSEPOWER/HINGE POINT  
 HPL HIGH PRESSURE LINE  
 Hwy HIGHWAY

**I**

IC IRRIGATION CONTROLLER  
 ICC IRRIGATION CONTROLLER(S)  
 IN CONTROLLER ENCLOSURE CABINET  
 ID INSIDE DIAMETER  
 IFS IRRIGATION FILTRATION SYSTEM  
 IPS IRON PIPE SIZE  
 IPT IRON PIPE THREAD  
 Irr IRRIGATION

**L**

L LENGTH

**M**

Max MAXIMUM  
 MBGR METAL BEAM GUARD RAILING  
 MCV MANUAL CONTROL VALVE  
 MIC MASTER IRRIGATION CONTROLLER  
 Min MINIMUM  
 MIPT MALE IRON PIPE THREAD  
 Misc MISCELLANEOUS  
 MtI MATERIAL  
 MVP MAINTENANCE VEHICLE PULLOUT

**N**

NCN NO COMMON NAME  
 NL NOZZLE LINE  
 No. NUMBER  
 NPT NATIONAL PIPE THREAD

**O**

O/C ON CENTER  
 OD OUTSIDE DIAMETER  
 OL OVERLAP

**P**

P PART CIRCLE  
 PB PULL BOX  
 PCC PORTLAND CEMENT CONCRETE  
 PE POLYETHYLENE  
 Pkt+ PACKET  
 PL PLASTIC  
 PLS PURE LIVE SEED  
 PLT PLANT/PLANTING  
 PLT ESTB PLANT ESTABLISHMENT  
 PM POST MILE  
 PR PRESSURE RATED  
 PRLV PRESSURE RELIEF VALVE  
 PRV PRESSURE REGULATING VALVE  
 PVC POLYVINYL CHLORIDE  
 Pvm+ PAVEMENT

**Q**

Q QUARTER CIRCLE  
 QCV QUICK COUPLING VALVE

**NOTE:**  
 For additional abbreviations,  
 see Standard Plans A10A and A10B.

**R**

R RADIUS  
 RCP REINFORCED CONCRETE PIPE  
 RCV REMOTE CONTROL VALVE  
 RCVM REMOTE CONTROL VALVE (MASTER)  
 RCVMF REMOTE CONTROL VALVE (MASTER) W/FLOW SENSOR  
 RCVP REMOTE CONTROL VALVE W/PRESSURE REGULATOR  
 RCW RECYCLED WATER  
 RECP ROLLED EROSION CONTROL PRODUCT  
 REQ REQUIRED  
 RICS REMOTE IRRIGATION CONTROL SYSTEM  
 R/W RIGHT OF WAY

**S**

S SLIP  
 SCH SCHEDULE  
 SF STATE-FURNISHED  
 Shld SHOULDER  
 Sq SQUARE  
 SST SIDE STRIP  
 Sta STATION  
 Std STANDARD  
 SW SIDEWALK/SOUND WALL

**T**

T THIRD CIRCLE/THREAD  
 TLS TRUCK LOADING STANDPIPE  
 TQ THREE QUARTER CIRCLE  
 TRM TURF REINFORCEMENT MAT  
 TT TWO-THIRDS CIRCLE  
 TWSA TREE WELL SPRINKLER ASSEMBLY  
 Typ TYPICAL

**U**

UG UNDERGROUND

**W**

W WIDTH  
 W/ WITH  
 WM WATER METER  
 WS WYE STRAINER  
 WSA WYE STRAINER ASSEMBLY  
 WSP WELDED STEEL PIPE  
 WWM WELDED WIRE MESH

TO ACCOMPANY PLANS DATED 6-1-15

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**LANDSCAPE AND  
 EROSION CONTROL ABBREVIATIONS**  
 NO SCALE

RSP H1 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN H1  
 DATED MAY 20, 2011 - PAGE 218 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP H1**

2010 REVISED STANDARD PLAN RSP H1

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	246	265


*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 November 15, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

2010 REVISED STANDARD PLAN RSP H2

EXISTING	NEW	ITEM DESCRIPTION
		WATER METER (WM)
		BACKFLOW PREVENTER ASSEMBLY (BPA)
		BACKFLOW PREVENTER ENCLOSURE (BPE)
		BOOSTER PUMP (BP)
		TRUCK LOADING STANDPIPE (TLS)
		FLOW SENSOR (FS)
		MASTER IRRIGATION CONTROLLER (MIC)
		AUXILIARY IRRIGATION CONTROLLER (AIC)
		IRRIGATION CONTROLLER (IC)
		IRRIGATION CONTROLLER (IC) (BATTERY)
		IRRIGATION CONTROLLER (IC) (SOLAR)
		IRRIGATION CONTROLLER (IC) (TWO WIRE)
		IRRIGATION CONTROLLER(S) IN CONTROLLER ENCLOSURE CABINET (ICC)
		ARMOR-CLAD CONDUCTORS (ACC)
		CONTROL AND NEUTRAL CONDUCTORS (CNC)
		IRRIGATION CONDUIT
		EXTEND IRRIGATION CONDUIT
		DUCTILE IRON PIPE (SUPPLY LINE) (MAIN) (DIP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (MAIN) (GSP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (LATERAL) (GSP)
		PLASTIC PIPE (SUPPLY LINE) (MAIN)
		PLASTIC PIPE (SUPPLY LINE) (LATERAL)
		COPPER PIPE (SUPPLY LINE)
		DRIP IRRIGATION TUBING
		REMOTE CONTROL VALVE (RCV)
		REMOTE CONTROL VALVE (MASTER) (RCVM)
		REMOTE CONTROL VALVE (MASTER) W/FLOW METER (RCVMF)
		REMOTE CONTROL VALVE W/PRESSURE REGULATOR (RCVP)
		EXISTING MANUAL CONTROL VALVE (MCV)
		DRIP VALVE ASSEMBLY (DVA)
		WYE STRAINER ASSEMBLY (WSA)

EXISTING	NEW	ITEM DESCRIPTION
		GATE VALVE (GV)
		BALL VALVE (BV)
		QUICK COUPLING VALVE (QCV)
		CAM COUPLER ASSEMBLY (CCA)
		GARDEN VALVE ASSEMBLY (GARVA)
		PRESSURE REGULATING VALVE (PRV)
		PRESSURE RELIEF VALVE (PRLV)
		FLOW CONTROL VALVE (FCV)
		COMBINATION AIR RELEASE VALVE (CARV)
		CHECK VALVE (CV)
		FLUSH VALVE (FV)
		EXISTING NOZZLE LINE W/TURNING UNION
		EXISTING IRRIGATION SYSTEM
		EXISTING IRRIGATION SYSTEM TO BE REMOVED
		CHAIN LINK GATE
		QUICK COUPLING VALVE W/SPRINKLER PROTECTOR
		SPRINKLER W/SPRINKLER PROTECTOR
		CONNECT TO EXISTING SYSTEM
		CAP
		CAP EXISTING
		FIBER ROLL
		COMPOST SOCK

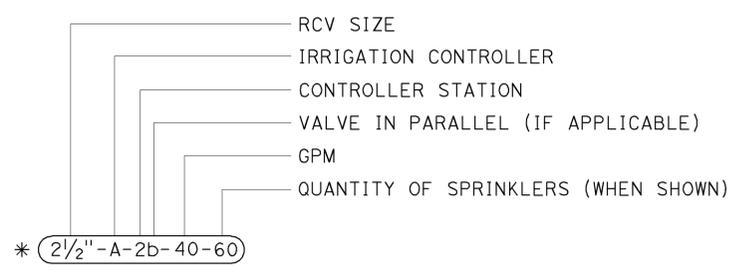

\* 2 1/2" - A - 2b - 40 - 60

**VALVE CODE**

\* VALVE CODES FOR EXISTING VALVES ARE SHOWN IN A DASHED ENCLOSURE.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**LANDSCAPE AND EROSION CONTROL SYMBOLS**  
 NO SCALE

RSP H2 DATED NOVEMBER 15, 2013 SUPERSEDES RSP H2 DATED JULY 19, 2013 AND STANDARD PLAN H2 DATED MAY 20, 2011 - PAGE 219 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP H2**

TO ACCOMPANY PLANS DATED 6-1-15

TABLE 1

TAPER LENGTH CRITERIA AND CHANNELIZING DEVICE SPACING							
SPEED (S)	MINIMUM TAPER LENGTH * FOR WIDTH OF OFFSET 12 FEET (W)				MAXIMUM CHANNELIZING DEVICE SPACING		
	TANGENT 2L	MERGING L	SHIFTING L/2	SHOULDER L/3	X	Y	Z **
					TAPER	TANGENT	CONFLICT
mph	ft	ft	ft	ft	ft	ft	ft
20	160	80	40	27	20	40	10
25	250	125	63	42	25	50	12
30	360	180	90	60	30	60	15
35	490	245	123	82	35	70	17
40	640	320	160	107	40	80	20
45	1080	540	270	180	45	90	22
50	1200	600	300	200	50	100	25
55	1320	660	330	220	55	110	27
60	1440	720	360	240	60	120	30
65	1560	780	390	260	65	130	32
70	1680	840	420	280	70	140	35

\* - For other offsets, use the following merging taper length formula for L:  
 For speed of 40 mph or less,  $L = WS^2/60$   
 For speed of 45 mph or more,  $L = WS$

Where: L = Taper length in feet  
 W = Width of offset in feet  
 S = Posted speed limit, off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph

\*\* - Use for taper and tangent sections where there are no pavement markings or where there is a conflict between existing pavement markings and channelizers (CA).

TABLE 2

LONGITUDINAL BUFFER SPACE AND FLAGGER STATION SPACING				
SPEED *	Min D **	DOWNGRADE Min D ***		
		-3%	-6%	-9%
		ft	ft	ft
mph	ft	ft	ft	ft
20	115	116	120	126
25	155	158	165	173
30	200	205	215	227
35	250	257	271	287
40	305	315	333	354
45	360	378	400	427
50	425	446	474	507
55	495	520	553	593
60	570	598	638	686
65	645	682	728	785
70	730	771	825	891

\* - Speed is posted speed limit, off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph  
 \*\* - Longitudinal buffer space or flagger station spacing  
 \*\*\* - Use on sustained downgrade steeper than -3 percent and longer than 1 mile.

TABLE 3

ADVANCE WARNING SIGN SPACING			
ROAD TYPE	DISTANCE BETWEEN SIGNS *		
	A	B	C
	ft	ft	ft
URBAN - 25 mph OR LESS	100	100	100
URBAN - MORE THAN 25 mph TO 40 mph	250	250	250
URBAN - MORE THAN 40 mph	350	350	350
RURAL	500	500	500
EXPRESSWAY / FREEWAY	1000	1500	2640

\* - The distances are approximate, are intended for guidance purposes only, and should be applied with engineering judgment. These distances should be adjusted by the Engineer for field conditions, if necessary, by increasing or decreasing the recommended distances.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION

**TRAFFIC CONTROL SYSTEM TABLES  
 FOR LANE AND RAMP CLOSURES**

NO SCALE

RSP T9 DATED JULY 19, 2013 SUPERSEDES RSP T9 DATED APRIL 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T9**


2010 REVISED STANDARD PLAN RSP T9

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	248	265

REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
 Gurinderpal Bhullar  
 No. C48815  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

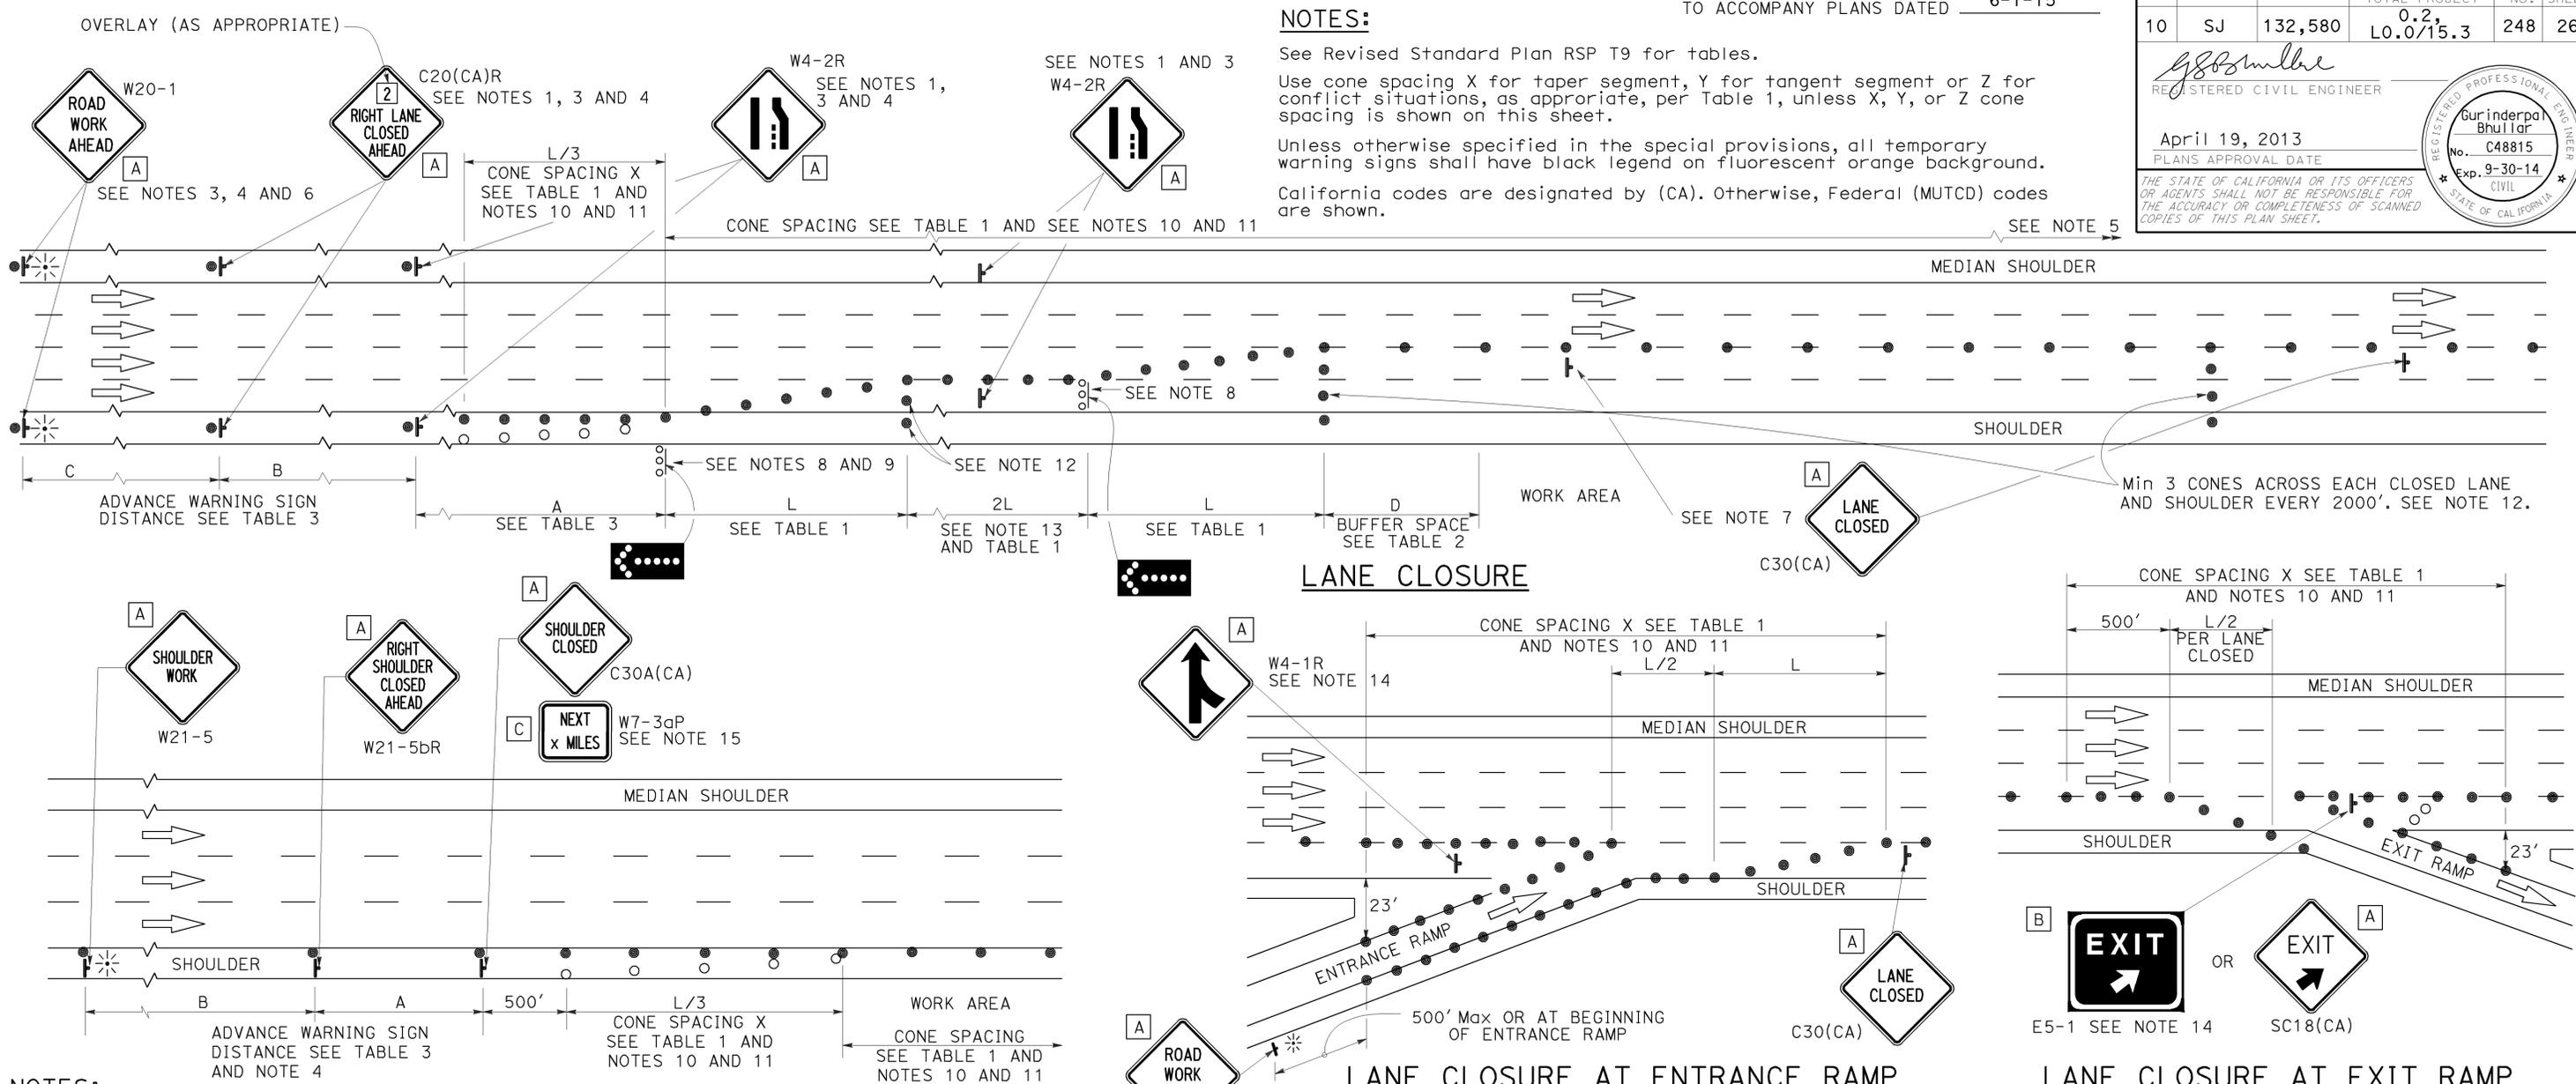

**NOTES:**

See Revised Standard Plan RSP T9 for tables.  
 Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.  
 Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.  
 California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

**NOTES:**

1. Median lane closures shall conform to the details as shown except that C20(CA)L and W4-2L signs shall be used.
2. At least one person shall be assigned to provide full time maintenance of traffic control devices for lane closures.
3. Duplicate sign installations are not required:
  - a) On opposite shoulder if at least one-half of the available lanes remain open to traffic.
  - b) In the median if the width of the median shoulder is less than 8' and the outside lanes are to be closed.
4. Each advance warning sign on each side of the roadway shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
5. A G20-2 "END ROAD WORK" sign, with minimum size of 48" x 24" as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious or ends within a larger project's limits.

**SHOULDER CLOSURE**

6. If the W20-1 sign would follow within 2000' of a stationary W20-1 or G20-1 "ROAD WORK NEXT \_\_\_\_\_ MILES", use a C20(CA)L and W4-2L signs shall be used.
7. Place a C30(CA) sign every 2000' throughout length of lane closure.
8. One flashing arrow sign for each lane closed. The flashing arrow signs shall be Type I.
9. A minimum 1500' of sight distance shall be provided where possible for vehicles approaching the first flashing arrow sign. Lane closures shall not begin at top of crest vertical curve or on a horizontal curve.
10. All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
11. Portable delineators, placed at one-half the spacing indicated for traffic cones may be used instead of cones for daytime closures only.

12. Unless otherwise specified in the special provisions, a minimum of 3 cones shall be placed transversely across each closed lane and shoulder at each location where a taper across a traffic lane ends and every 2000' as shown on the "Lane Closure" detail. Two Type II barricades may be used instead of the 3 cones. The transverse alignment of the cones or barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.
13. Unless otherwise specified in the special provisions, the 2L tangent shown along lane lines shall be used between the L tapers required for each closed traffic lane.
14. Unless otherwise specified in the special provisions, the E5-1 or SC18(CA) and W4-1 signs shall be used as shown.
15. A W7-3aP "NEXT \_\_\_\_\_ MILES" plaque must be used if the shoulder closure extends beyond the distance that can be perceived by road users.

**LEGEND**

- TRAFFIC CONE
- TRAFFIC CONE (OPTIONAL TAPER)
- † TEMPORARY TRAFFIC CONTROL SIGN
- ⬢ FLASHING ARROW SIGN (FAS)
- ⬢ FAS SUPPORT OR TRAILER
- ⚡ PORTABLE FLASHING BEACON

**SIGN PANEL SIZE (Min)**

- A 48" x 48"
- B 72" x 60"
- C 36" x 30"

**TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE ON FREEWAYS AND EXPRESSWAYS**

NO SCALE  
 RSP T10 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T10 DATED MAY 20, 2011 - PAGE 237 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T10**

2010 REVISED STANDARD PLAN RSP T10


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	249	265

REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
 Gurinderpal Bhullar  
 No. C48815  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

**NOTES:** See Revised Standard Plan RSP T9 for tables.  
 Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.  
 Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.  
 California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

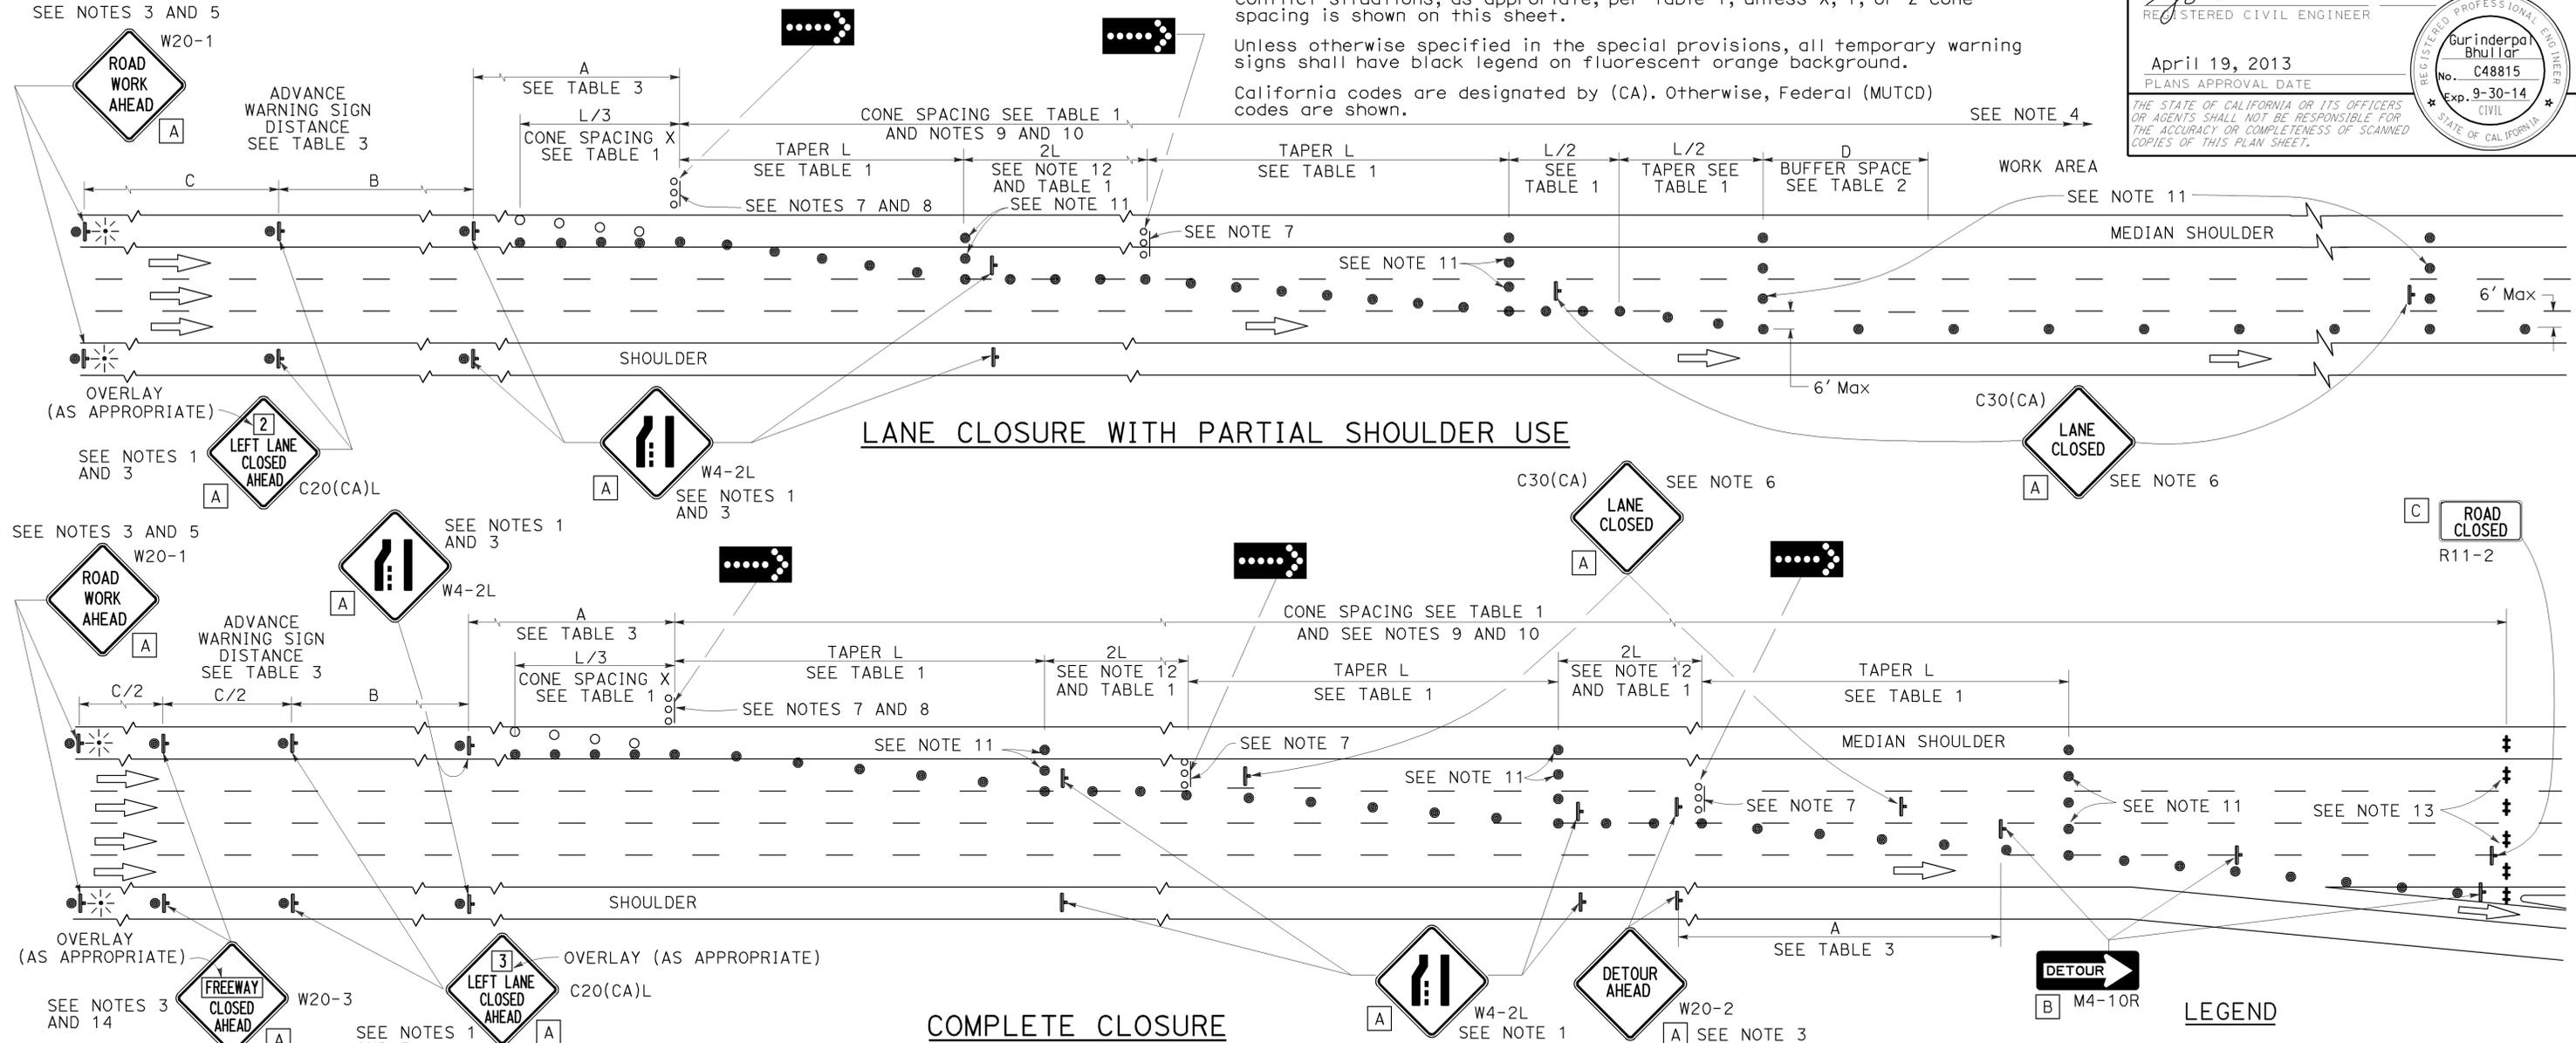

- NOTES:**
- Lane closures on the right side using partial median shoulder as a traffic lane shall conform to the details as shown except that C20(CA)R and W4-2R signs shall be used.
  - At least one person shall be assigned to provide full time maintenance of traffic control devices for lane closures.
  - Each advance warning sign on each side of the roadway shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" X 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
  - A G20-2 "END ROAD WORK" sign, with minimum size of 48" x 24" as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious or ends within a larger project's limits.
  - If the W20-1 sign would follow within 2000' of a stationary W20-1 or G20-1 "ROAD WORK NEXT \_\_\_ MILES", use a C20(CA) sign for the first advance warning sign.
  - Place a C30(CA) sign every 2000' throughout length of lane closure.

- One flashing arrow sign for each lane closed. The flashing arrow signs shall be Type I.
- A minimum 1500' of sight distance shall be provided where possible for vehicles approaching the first flashing arrow sign. Lane closures shall not begin at the top of crest vertical curve or on a horizontal curve.
- All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
- Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime closures only.
- Unless otherwise specified in the special provisions, a minimum of 3 cones shall be placed transversely across each closed lane and shoulder at each location where a taper across a traffic lane ends and every 2000' as shown on the "Lane Closure With Partial Shoulder Use" detail. Two Type II barricades may be used instead of the 3 cones. The transverse alignment of the cones or barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.

- Unless otherwise specified in the special provisions, the 2L tangent shown along lane lines shall be used between the L tapers required for each closed traffic lane.
- A minimum of Two Type II or III barricades shall be placed across each closed lane and shoulder at the location shown and every 2000' within the complete closure area. Within the complete closure area, the transverse alignment of the barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.
- When specified in the special provisions, a W20-2 "DETOUR AHEAD" sign is to be used in place of the W20-3 "FREEWAY CLOSED AHEAD" sign.

**SIGN PANEL SIZE (Min)**

A	48" x 48"
B	48" x 18"
C	48" x 30"

**LEGEND**

- TRAFFIC CONE
- TRAFFIC CONE (OPTIONAL TAPER)
- ⊥ TEMPORARY TRAFFIC CONTROL SIGN
- FLASHING ARROW SIGN (FAS)
- FAS SUPPORT OR TRAILER
- ⚡ PORTABLE FLASHING BEACON

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION

## TRAFFIC CONTROL SYSTEM FOR LANE CLOSURES ON FREEWAYS AND EXPRESSWAYS

NO SCALE

RSP T10A DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T10A DATED MAY 20, 2011 - PAGE 238 OF THE STANDARD PLANS BOOK DATED 2010.

### REVISED STANDARD PLAN RSP T10A

2010 REVISED STANDARD PLAN RSP T10A

# TYPICAL RAMP CLOSURES

## SIGN PANEL SIZE (Min)

- A 48" x 48"
- B 48" x 30"
- C 36" x 36"
- D 48" x 36"

## LEGEND

- TRAFFIC CONE
- † TEMPORARY TRAFFIC CONTROL SIGN
- ‡ BARRICADES
- ⚡ PORTABLE FLASHING BEACON

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	250	265


*Gurinderpal Bhullar*  
 REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
**Gurinderpal Bhullar**  
 No. C48815  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 6-1-15

## NOTES:


- Barricades shall be Type I, II, or III for closures lasting one week or less and Type III for closures lasting longer than one week.
- In addition to placing the C19(CA) "RAMP CLOSED AHEAD" and C30(CA) "RAMP CLOSED" signs, black on orange overlay plates with the word "CLOSED" may be mounted, as directed by the Engineer, on all guide signs that refer to the closed ramp. The letter size on the overlay shall be the same as the guide sign.
- Each advance C19(CA) "RAMP CLOSED AHEAD" sign shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. A flashing beacon shall be placed on top of the first C19(CA) sign during hours of darkness.
- All cones used for ramp closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
- Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime ramp closures only.
- At least one person shall be assigned to provide full time maintenance of traffic control devices, unless otherwise directed by the Engineer.
- The existing "EXIT" signs shall be covered during ramp closures.
- A minimum of 3 cones shall be placed transversely across each closed lane and shoulder.

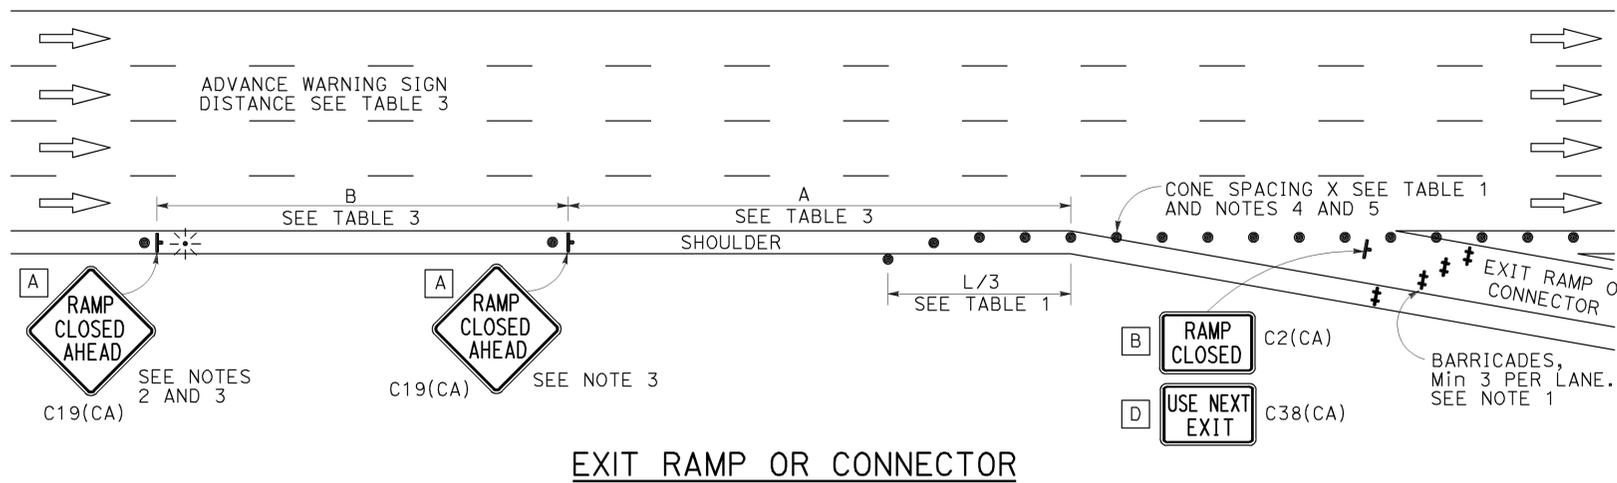


EXIT RAMP OR CONNECTOR

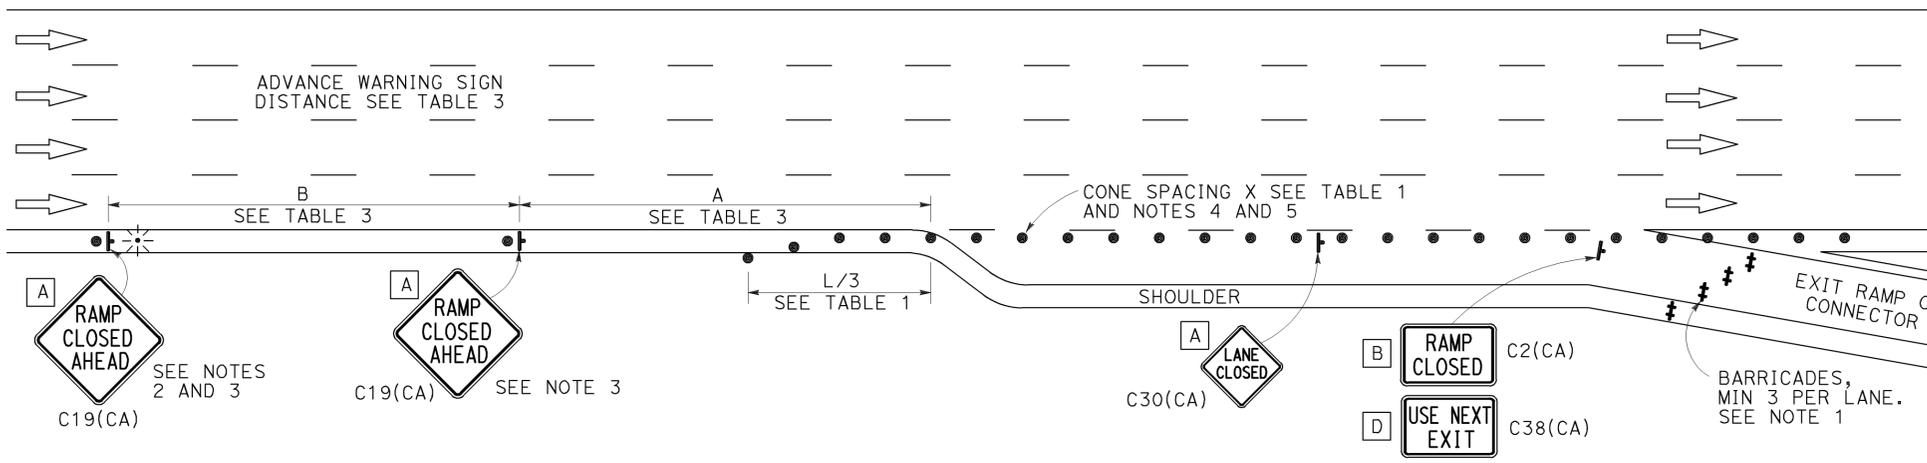

EXIT RAMP OR CONNECTOR WITH ADDITIONAL LANE

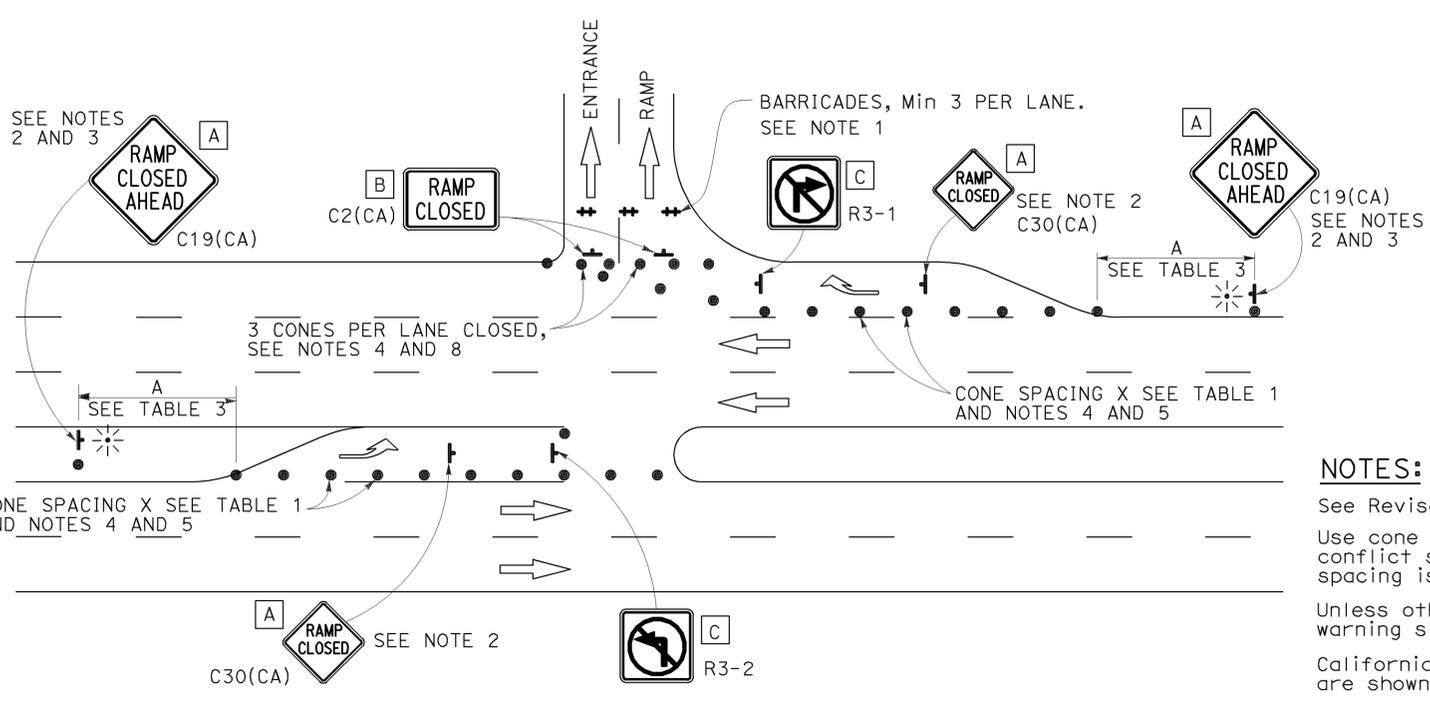

ENTRANCE RAMP WITH TURNING POCKETS

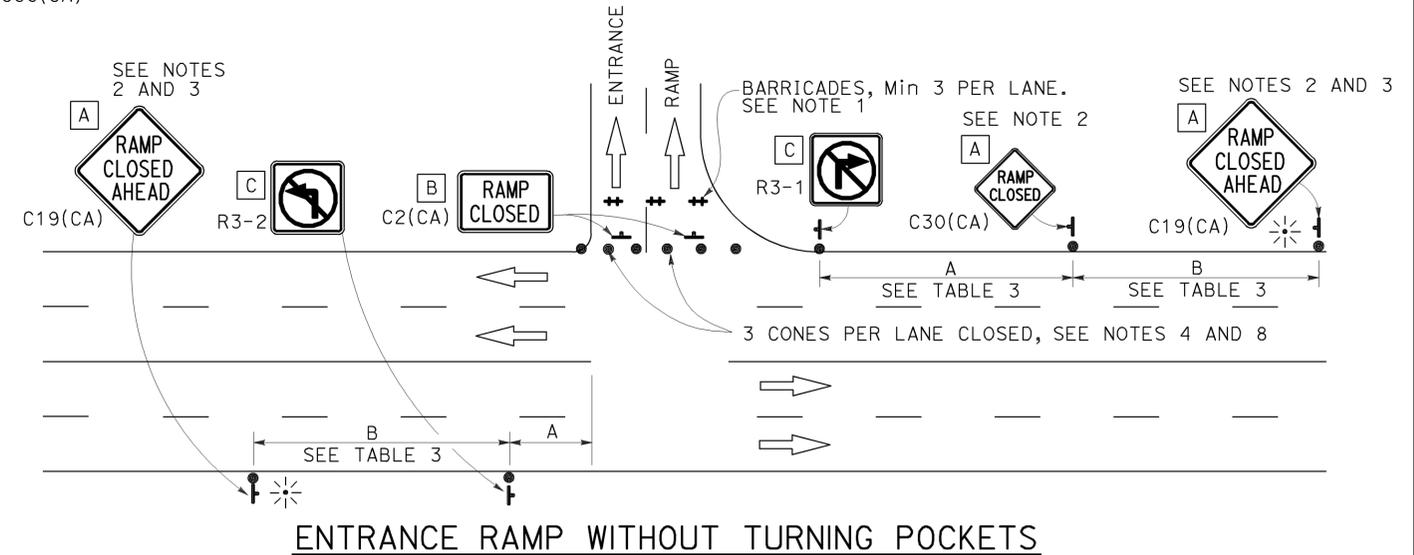

ENTRANCE RAMP WITHOUT TURNING POCKETS

## NOTES:


- See Revised Standard Plan RSP T9 for tables.
- Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.
- Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.
- California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL SYSTEM  
 FOR RAMP CLOSURE**  
 NO SCALE


RSP T14 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T14  
 DATED MAY 20, 2011 - PAGE 242 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T14**

2010 REVISED STANDARD PLAN RSP T14



TO ACCOMPANY PLANS DATED 6-1-15

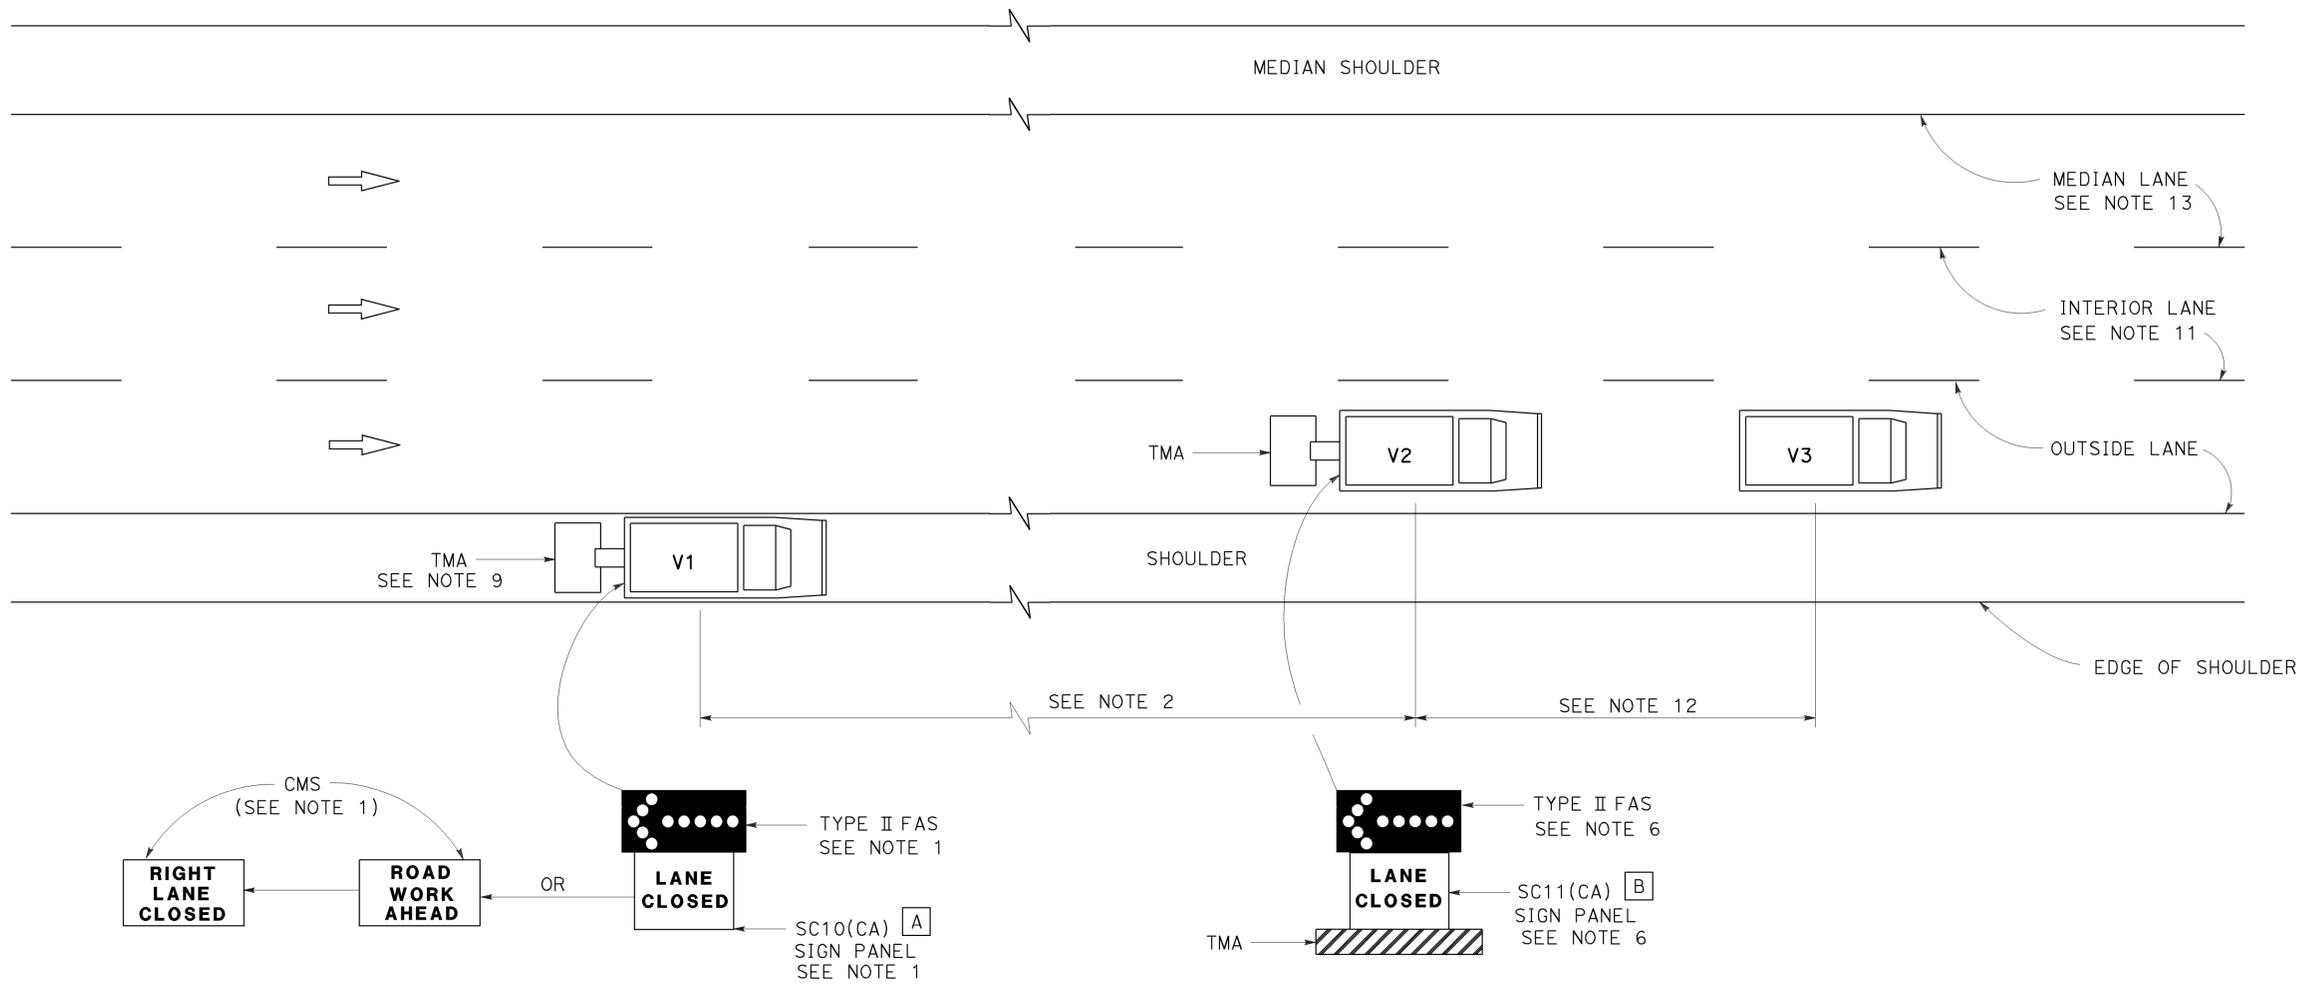

**SIGN PANEL SIZE (Min)**

- A 66" x 36"
- B 54" x 42"

**LEGEND**

- V1 SIGN VEHICLE
- V2 SHADOW VEHICLE
- V3 WORK/APPLICATION VEHICLE
- FLASHING ARROW SIGN (FAS)
- CMS CHANGEABLE MESSAGE SIGN
- TMA TRUCK-MOUNTED ATTENUATOR

**MOVING LANE CLOSURE ON MEDIAN LANE OR OUTSIDE LANE OF MULTILANE HIGHWAYS**

**NOTES:**

1. Either a changeable message sign or a SC10(CA) sign panel and a Type II flashing arrow sign shall be mounted on the rear of sign vehicle V1. The changeable message sign shall be sequenced to show the "ROAD WORK AHEAD" message first, followed by the "RIGHT LANE CLOSED" message. For median lane closure, the flashing arrow symbol shall be reversed with the arrowhead on the right and the changeable message sign shall show "LEFT LANE CLOSED".
2. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue. Sign vehicle V1 shall be positioned where highly visible when shoulders are not available.
3. A minimum sight distance of 1500' should be provided in advance of sign vehicle V1.
4. Sign vehicle V1 should remain at the beginning of horizontal or vertical curves until the other vehicles (V2 and V3) are far enough beyond the curve to resume the minimum sight distance of 1500'.
5. Vehicle-mounted sign panels shall have Type III or above retroreflective sheeting, black on white, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
6. Shadow vehicle V2 shall be equipped with a truck-mounted attenuator. The sign panel shown and a Type II flashing arrow sign shall be mounted on the rear of shadow vehicle V2. For median lane closure the flashing arrow sign symbol shall be displayed with the arrowhead on the right.
7. All vehicles used for lane closures shall be equipped with two-way radios, and the vehicle operators shall maintain communication during the work or application operation.
8. All vehicles shall be equipped with flashing or rotating amber lights.
9. If sign vehicle V1 encroaches into the traffic lane due to insufficient shoulder width, sign vehicle V1 shall be equipped with a truck-mounted attenuator. Sign vehicle V1 shall stay as close to the edge of shoulder as practicable.
10. Where workers would be on foot in the work area, a stationary type lane closure (Revised Standard Plan T10, T11, etc., as applicable) shall be used instead of this plan.
11. For moving lane closure on interior lane of multilane highways, use Revised Standard Plan T16.
12. The spacing between work vehicle(s) and the shadow vehicles, and between each shadow vehicle should be minimized to deter road users from driving in between.
13. When the work/application vehicle V3 occupies the median lane, sign vehicle V1 should drive in the median shoulder and indicate left lane closed ahead.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TRAFFIC CONTROL SYSTEM FOR MOVING LANE CLOSURE ON MULTILANE HIGHWAYS**

NO SCALE

RSP T15 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T15 DATED MAY 20, 2011 - PAGE 243 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T15**


2010 REVISED STANDARD PLAN RSP T15

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	252	265

Registered Civil Engineer  
 April 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 6-1-15

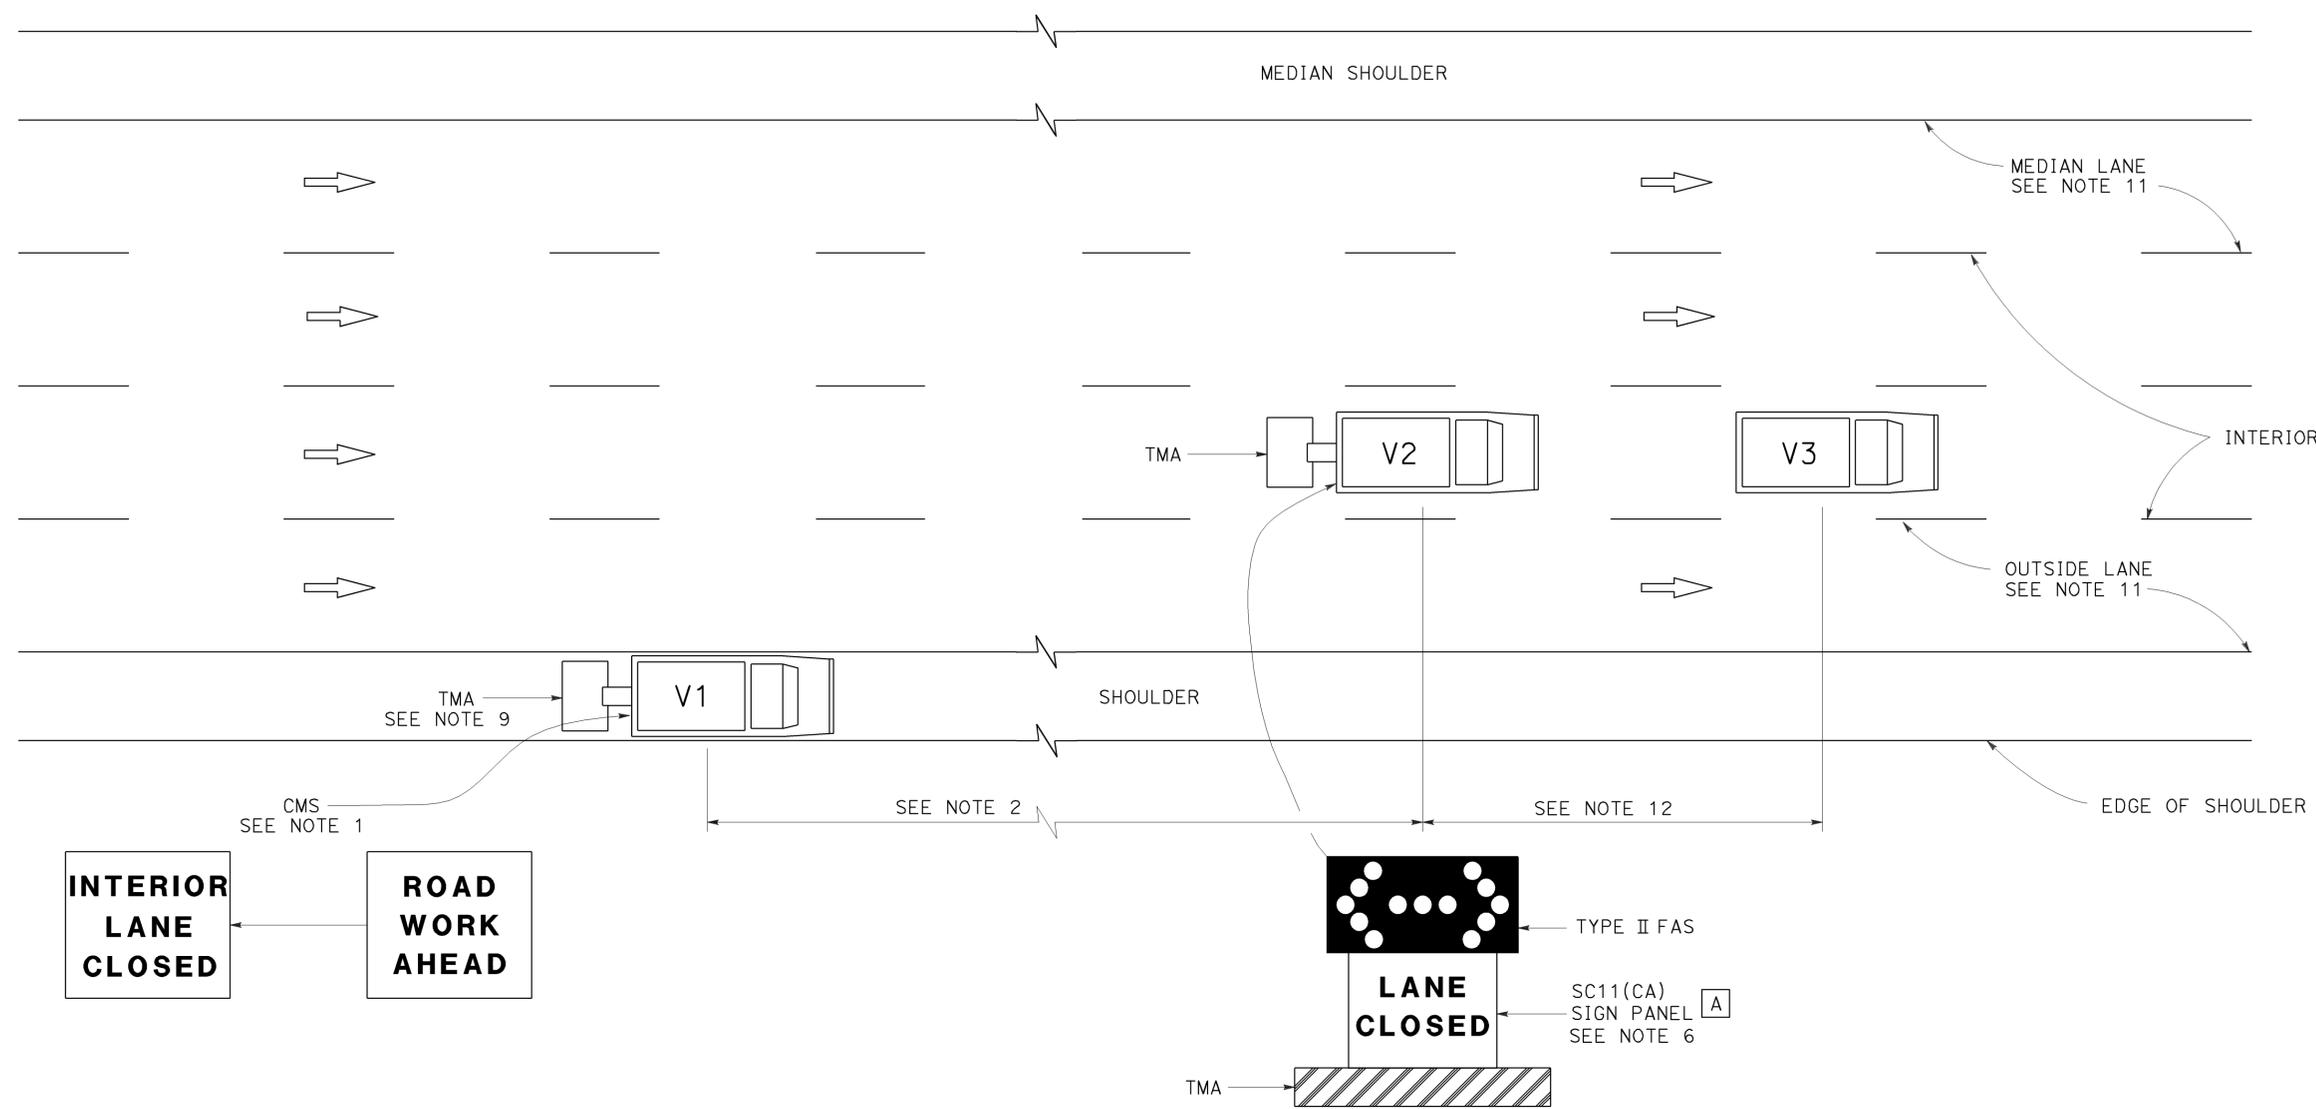

SIGN PANEL SIZE (Min)

A 54" x 42"

LEGEND

- V1 SIGN VEHICLE
- V2 SHADOW VEHICLE
- V3 WORK/APPLICATION VEHICLE
- FLASHING ARROW SIGN (FAS) IN FLASHING DOUBLE ARROW MODE
- CMS CHANGEABLE MESSAGE SIGN
- TMA TRUCK-MOUNTED ATTENUATOR

**MOVING LANE CLOSURE ON INTERIOR LANE OF MULTILANE HIGHWAYS**

NOTES:

1. A changeable message sign shall be mounted on the rear of sign vehicle V1. The changeable message sign shall be sequenced to show the "ROAD WORK AHEAD" message first, followed by the "INTERIOR LANE CLOSED" message. The message "CENTER LANE CLOSED" may be used in place of the "INTERIOR LANE CLOSED" message.
2. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue. Sign vehicle V1 shall be positioned where highly visible when shoulders are not available.
3. A minimum sight distance of 1500' should be provided in advance of sign vehicle V1.
4. Sign vehicle V1 should remain at the beginning of horizontal or vertical curves until the other vehicles (V2 and V3) are far enough beyond the curve to resume the minimum sight distance of 1500'.
5. Vehicle-mounted sign panels shall have Type III or above retroreflective sheeting, black on white, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
6. Shadow vehicle V2 shall be equipped with a truck-mounted attenuator. The sign panel shown and a Type II flashing arrow sign shall be mounted on the rear of shadow vehicle V2.
7. All vehicles used for lane closures shall be equipped with two-way radios, and the vehicle operators shall maintain communication during the work or application operation.
8. All vehicles shall be equipped with flashing or rotating amber lights.
9. If sign vehicle V1 encroaches into the traffic lane due to insufficient shoulder width, sign vehicle V1 shall be equipped with a truck-mounted attenuator. Sign vehicle V1 shall stay as close to the edge of shoulder as practicable.
10. Where workers would be on foot in the work area, a stationary type lane closure (Revised Standard Plan T10, T11 etc., as applicable) shall be used instead of this plan.
11. For moving lane closure on median lane or outside lane of multilane highways, use Revised Standard Plan T15.
12. The spacing between work vehicle(s) and the shadow vehicles, and between each shadow vehicle should be minimized to deter road users from driving in between.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL SYSTEM  
 FOR MOVING LANE CLOSURE  
 ON MULTILANE HIGHWAYS**  
 NO SCALE

RSP T16 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T16 DATED MAY 20, 2011 - PAGE 244 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T16**


2010 REVISED STANDARD PLAN RSP T16

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	253	265

July 19, 2013  
 PLANS APPROVAL DATE  
 REGISTERED CIVIL ENGINEER  
 Stanley P. Johnson  
 No. C57793  
 Exp. 3-31-14  
 CIVIL  
 STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 6-1-15

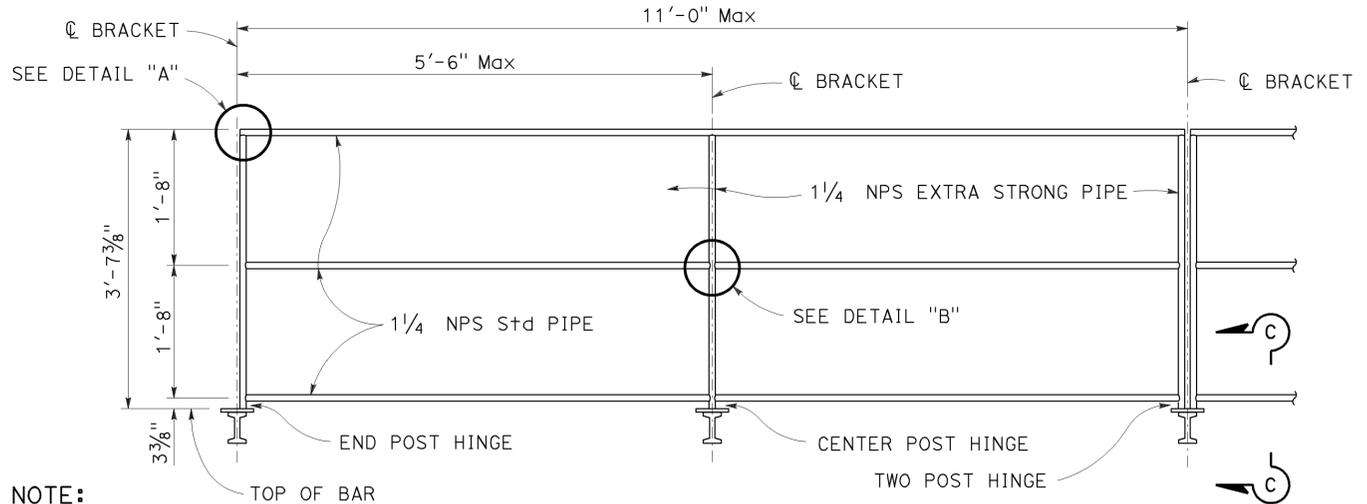


**SAFETY RAILING ELEVATION**

**NOTE:**  
Chain assembly behind (see detail this page)


**NOTE:**  
See Standard Plans S101 and S105 and S109 for walkway bracket spacing.

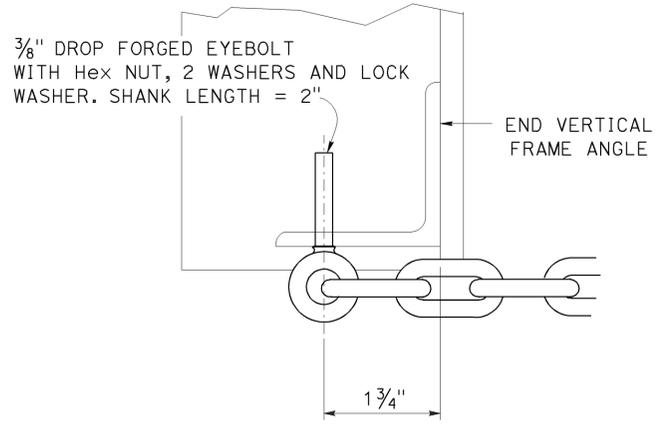


**SECTION D-D**

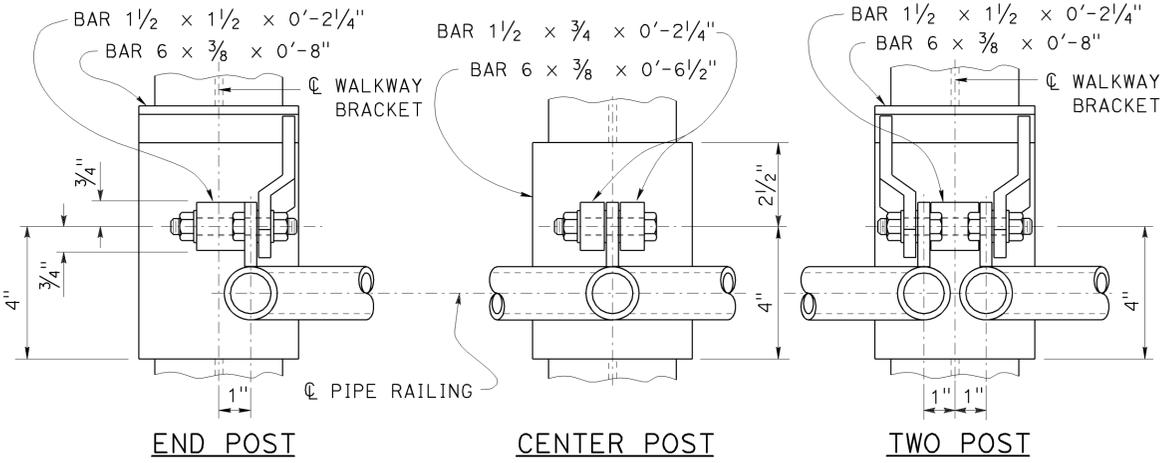


**WELDED HINGE - PLAN**

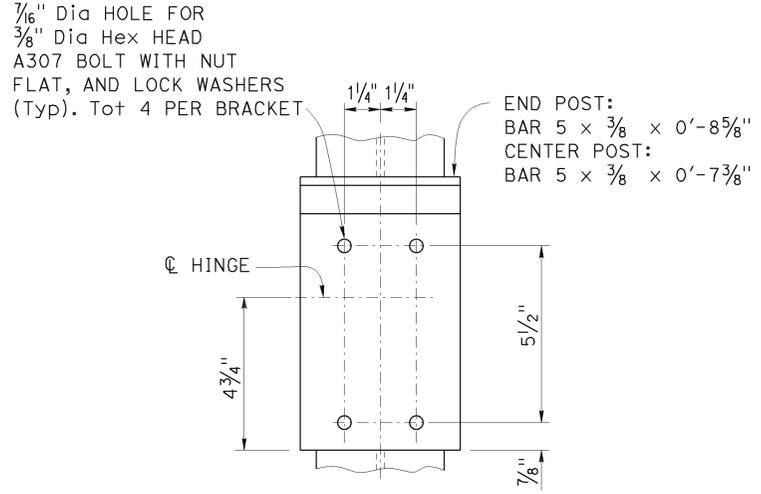


**TYPICAL BOLTED (ALTERNATIVE) HINGED CONNECTION**

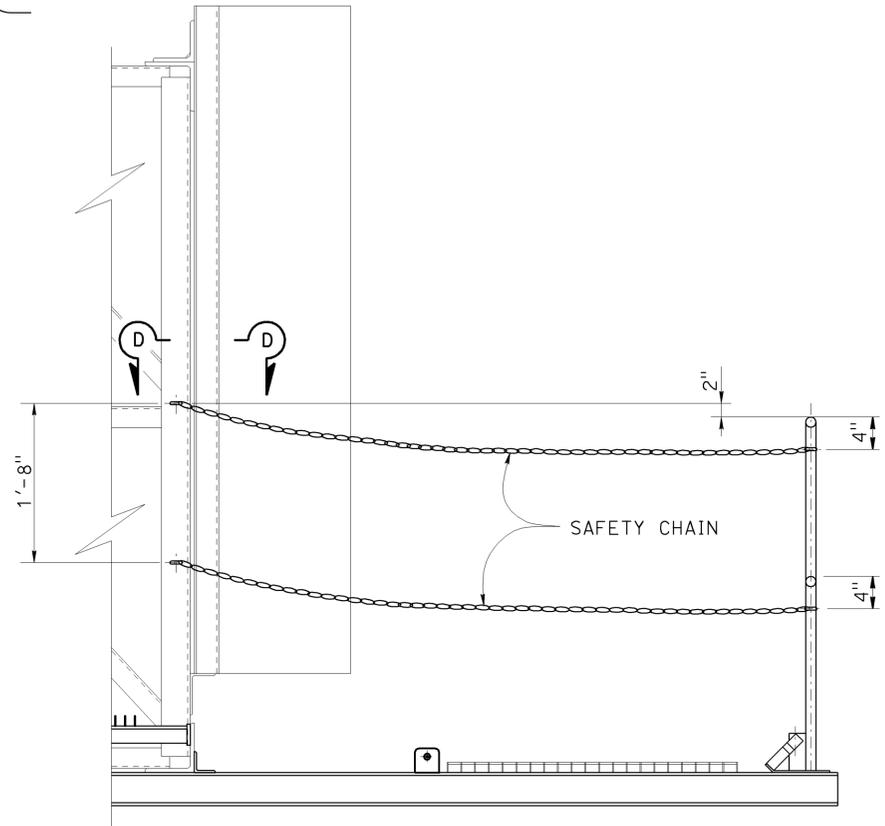


**CHAIN ASSEMBLY**

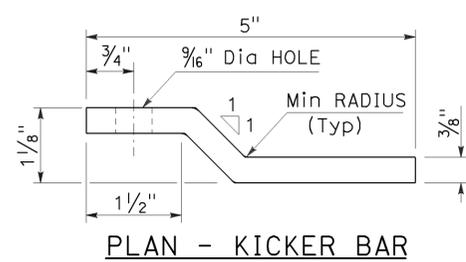

**PLAN - KICKER BAR**

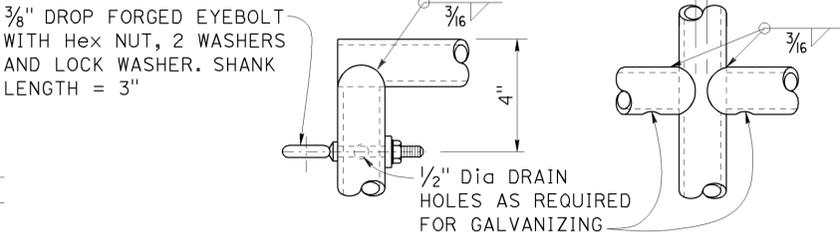

**NOTE:**  
Alternative venting methods may be used if approved by the Engineer.

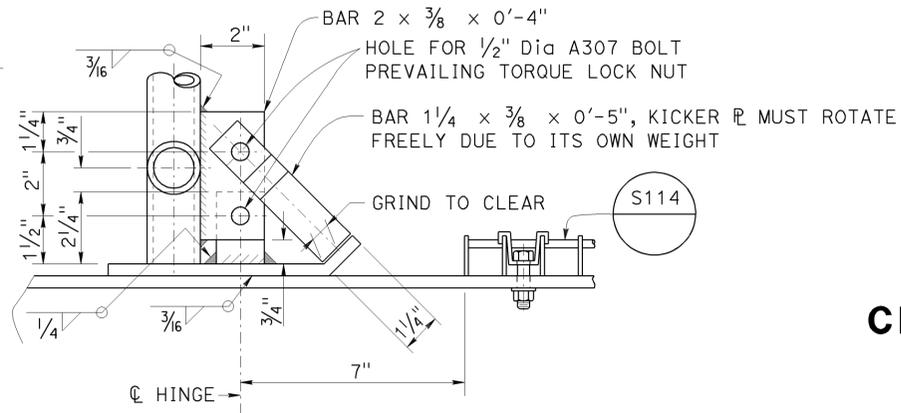

**SECTION C-C ELEVATION VIEW**

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**OVERHEAD SIGN-TRUSS  
 SINGLE POST TYPE  
 WALKWAY SAFETY  
 RAILING DETAILS  
 CHANGEABLE MESSAGE SIGNS  
 MODEL 500 AND 510**  
 NO SCALE

RSP S140 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN S140 DATED MAY 20, 2011 - PAGE 422 OF THE STANDARD PLANS BOOK DATED 2010.



**REVISED STANDARD PLAN RSP S140**

2010 REVISED STANDARD PLAN RSP S140

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	254	265

Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


2010 REVISED STANDARD PLAN RSP S141

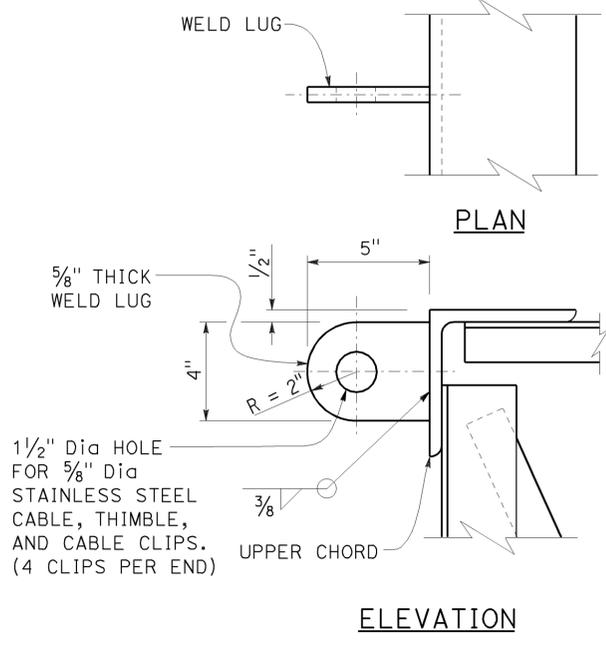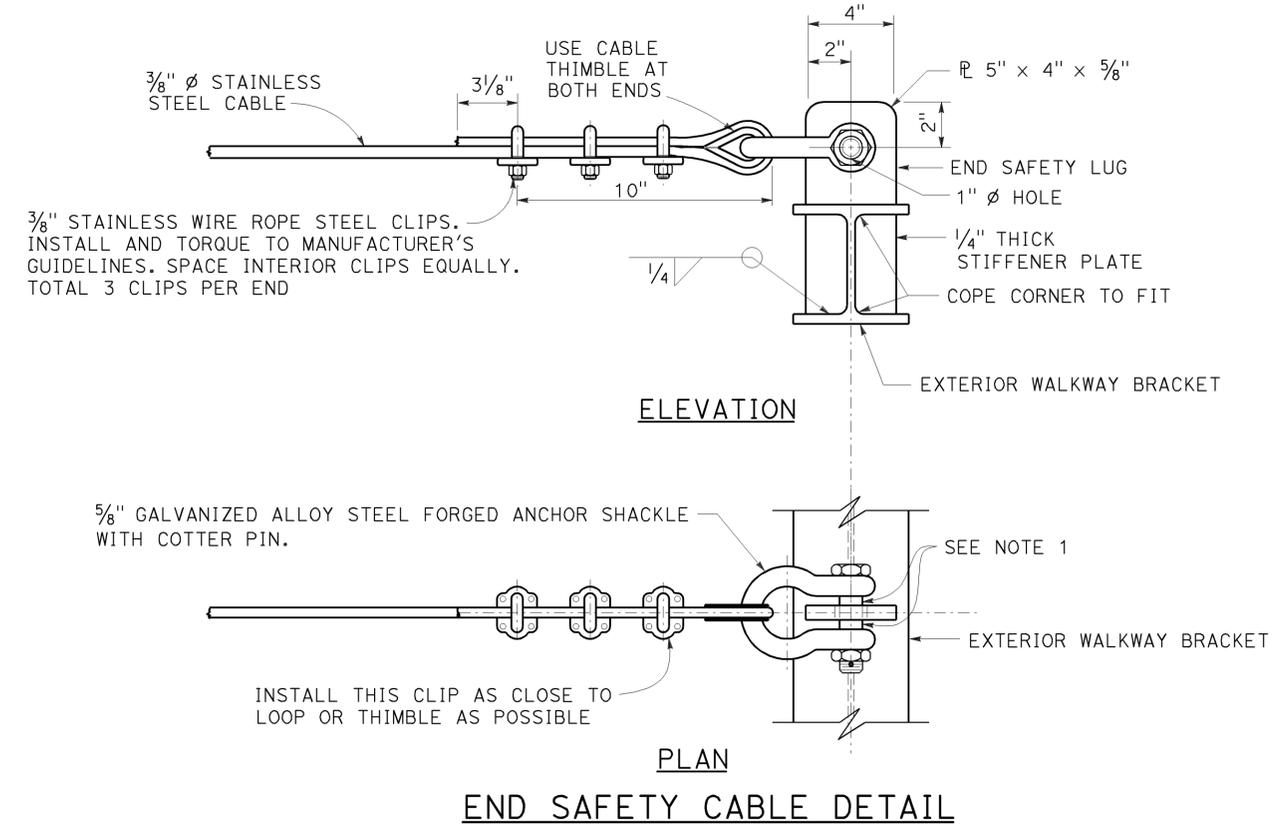

**NOTE:** Backside weld lug shall be installed only for projects requiring backside walkways.

**NOTES:**

1. Place an equal amount of washers on each side to align cable with end lug without restricting shackle bolt rotation or contacting cable.
2. For walkway grating details, see Standard Plan S114.

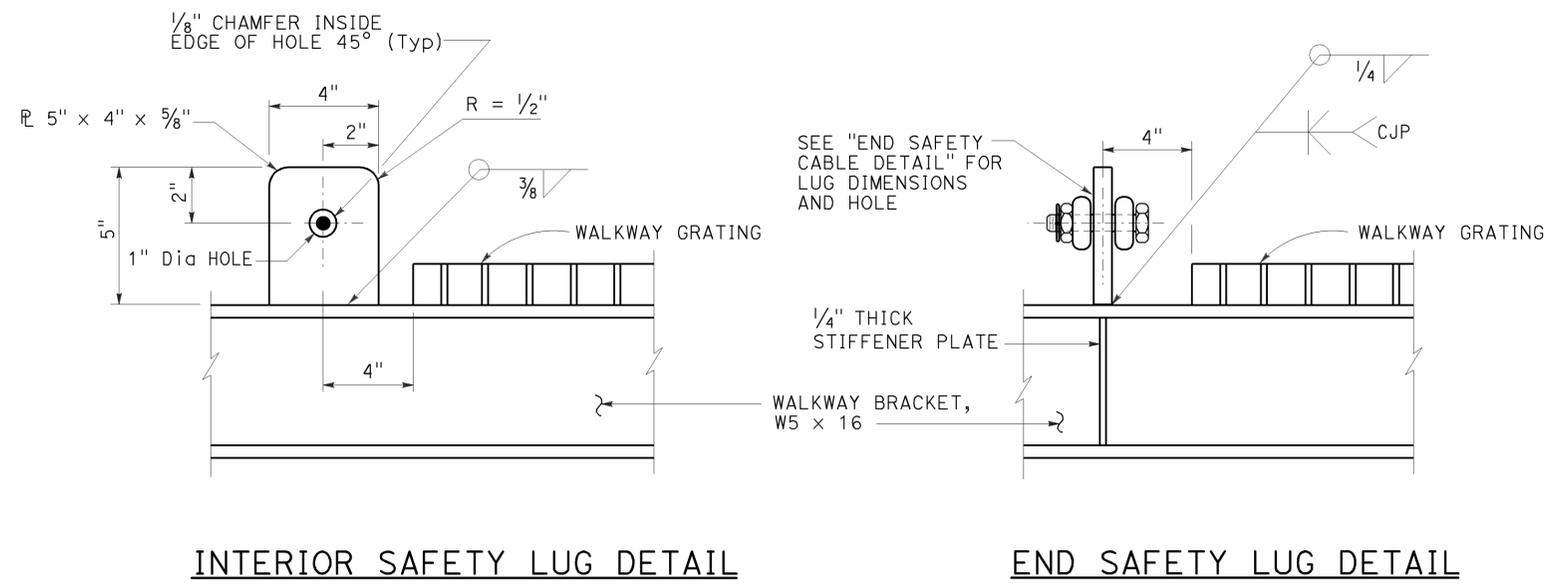

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**OVERHEAD SIGN-TRUSS  
 SINGLE POST TYPE  
 SAFETY CABLE  
 ANCHORAGE DETAILS  
 CHANGEABLE MESSAGE SIGNS  
 MODEL 500 AND 510**

NO SCALE

RSP S141 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN S141 DATED MAY 20, 2011 - PAGE 423 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP S141**

**LEGEND:**

<b>AB</b>	ABANDON. IF APPLIED TO CONDUIT, REMOVE CONDUCTORS
<b>BC</b>	INSTALL PULL BOX IN EXISTING CONDUIT RUN
<b>BP</b>	PEDESTRIAN BARRICADE, TYPE AS INDICATED ON PLAN
<b>CB</b>	INSTALL CONDUIT INTO EXISTING PULL BOX
<b>CC</b>	CONNECT NEW AND EXISTING CONDUIT. REMOVE EXISTING CONDUCTORS AND INSTALL CONDUCTORS AS INDICATED
<b>CF</b>	CONDUIT TO REMAIN FOR FUTURE USE. REMOVE CONDUCTORS. INSTALL PULL TAPE
<b>DH</b>	DETECTOR HANDHOLE
<b>FA</b>	FOUNDATION TO BE ABANDONED
<b>IS</b>	INSTALL SIGN ON SIGNAL MAST ARM
<b>NS</b>	NO SLIP BASE ON STANDARD
<b>PEC</b>	PHOTOELECTRIC CONTROL
<b>PEU</b>	PHOTOELECTRIC UNIT
<b>RC</b>	EQUIPMENT OR MATERIAL TO BE REMOVED AND BECOME THE PROPERTY OF THE CONTRACTOR
<b>RE</b>	REMOVE ELECTROLIER, FUSES AND BALLAST. TAPE ENDS OF CONDUCTORS
<b>RL</b>	RELOCATE EQUIPMENT
<b>RR</b>	REMOVE AND REUSE EQUIPMENT
<b>RS</b>	REMOVE AND SALVAGE EQUIPMENT
<b>SC</b>	SPLICE NEW TO EXISTING CONDUCTORS
<b>SD</b>	SERVICE DISCONNECT
<b>TSP</b>	TELEPHONE SERVICE POINT

**ABBREVIATIONS**

APS	ACCESSIBLE PEDESTRIAN SIGNAL	M/M	MULTIPLE TO MULTIPLE TRANSFORMER
BBS	BATTERY BACKUP SYSTEM	Mtg	MOUNTING
BC	BOLT CIRCLE	MV	MERCURY VAPOR LIGHTING FIXTURE
BPB	BICYCLE PUSH BUTTON	MVDS	MICROWAVE VEHICLE DETECTION SYSTEM
C	CONDUIT	N	NEUTRAL (GROUNDED CONDUCTOR)
CB	CIRCUIT BREAKER	NB	NEUTRAL BUS
CCTV	CLOSED CIRCUIT TELEVISION	NC	NORMALLY CLOSE
Ck+	CIRCUIT	NO	NORMALLY OPEN
CMS	CHANGEABLE MESSAGE SIGN	P	CIRCUIT BREAKER'S POLE
Ctid	CALTRANS IDENTIFICATION	PB	PULL BOX
Comm	COMMUNICATION	PBA	PUSH BUTTON ASSEMBLY
DLC	LOOP DETECTOR LEAD-IN CABLE	PEC	PHOTOELECTRIC CONTROL
EMS	EXTINGUISHABLE MESSAGE SIGN	Ped	PEDESTRIAN
EVUC	EMERGENCY VEHICLE UNIT CABLE	PEU	PHOTOELECTRIC UNIT
EVUD	EMERGENCY VEHICLE UNIT DETECTOR	PT	CONDUIT WITH PULL TAPE
FB	FLASHING BEACON	RE	RELOCATED EQUIPMENT
FBCA	FLASHING BEACON CONTROL ASSEMBLY	RM	RAMP METERING
FBS	FLASHING BEACON WITH SLIP BASE	RWIS	ROADSIDE WEATHER INFORMATION SYSTEM
FO	FIBER OPTIC	SB	SLIP BASE
G	EQUIPMENT GROUNDING CONDUCTOR	SIC	SIGNAL INTERCONNECT CABLE
GB	GROUND BUS	Sig	SIGNAL
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SMA	SIGNAL MAST ARM
HAR	HIGHWAY ADVISORY RADIO	SNS	STREET NAME SIGN
Hex	HEXAGONAL	SP	SERVICE POINT
HPS	HIGH PRESSURE SODIUM	TDC	TELEPHONE DEMARCATION CABINET
IISNS	INTERNALLY ILLUMINATED STREET NAME SIGN	TMS	TRAFFIC MONITORING STATION
ISL	INDUCTION SIGN LIGHTING	TOS	TRAFFIC OPERATIONS SYSTEM
LED	LIGHT EMITTING DIODE	Veh	VEHICLE
LMA	LUMINAIRE MAST ARM	VIVDS	VIDEO IMAGE VEHICLE DETECTION SYSTEM
LPS	LOW PRESSURE SODIUM	WIM	WEIGH-IN-MOTION
Ltg	LIGHTING	Xfmr	TRANSFORMER
Lum	LUMINAIRE		
M	METERED		
MAT	MAST ARM MOUNTING TOP ATTACHMENT		
MAS	MAST ARM MOUNTING SIDE ATTACHMENT		

**MISCELLANEOUS ELECTROLIERS**

<u>NEW</u>	<u>EXISTING</u>	
		LUMINAIRE ON WOOD POLE
		NON-STANDARD ELECTROLIER (SEE PROJECT NOTES OR PROJECT PLANS)
		CITY ELECTROLIER
		ELECTROLIER FOUNDATION (FUTURE INSTALLATION)

**NOTES:**

- HPS luminaires shall be 310 W HPS when installed on Type 21, 21D, 30, 31 and 32 Standards, unless otherwise specified. HPS luminaires shall be 200 W when installed on other type standards or poles, unless otherwise specified.
- LED luminaires shall be 235 W when installed on Type 21, 21D, 30, 31 and 32 Standards, unless otherwise specified. LED luminaires shall be 165 W when installed on other type standards or poles, unless otherwise specified.
- Luminaires shall be the cutoff type, ANSI Type III medium cutoff lighting distribution, unless otherwise specified.

**STANDARD ELECTROLIER**

<u>NEW</u>	<u>EXISTING</u>	<u>STANDARD TYPE</u>
		15
		15D
		15 STRUCTURE
		15D STRUCTURE
		21
		21D
		21 STRUCTURE
		21D STRUCTURE
		30
		31
		32

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, 10.0/15.3	255	265

*Theresa Gabriel*  
REGISTERED ELECTRICAL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

Theresa Gabriel  
Aziz Gabriel  
No. E15129  
Exp. 6-30-14  
ELECTRICAL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

**SOFFIT AND WALL MOUNTED LUMINAIRES**

- PENDANT, 70 W HPS UNLESS OTHERWISE SPECIFIED
- FLUSH, 70 W HPS UNLESS OTHERWISE SPECIFIED
- WALL SURFACE, 70 W HPS UNLESS OTHERWISE SPECIFIED
- EXISTING SOFFIT OR WALL LUMINAIRE TO REMAIN UNMODIFIED
- EXISTING SOFFIT OR WALL LUMINAIRE TO BE MODIFIED AS SPECIFIED

**NOTE:**

Arrow indicates "street side" of luminaire.

COMMONLY USED SYMBOLS FOR UNITED STATES CUSTOMARY UNITS OF MEASUREMENT:

SYMBOL USED	DEFINITIONS
$\Omega$	OHMS
min	MINUTE
s	SECOND
bps	BITS PER SECOND
Bps	BYTES PER SECOND
A	AMPERE
V	VOLT
V(dc)	VOLT (DIRECT CURRENT)
V(ac)	VOLT (ALTERNATING CURRENT)
FC	FOOT - CANDLE
W	WATTS
VA	VOLT-AMPERE
M	MEGA
k	KILO
m	MILLI
$\mu$	MICRO
P	PICO
Hz	HERTZ

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS (LEGEND AND ABBREVIATIONS)**

NO SCALE

RSP ES-1A DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN ES-1A DATED MAY 20, 2011 - PAGE 425 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-1A**

2010 REVISED STANDARD PLAN RSP ES-1A

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	256	265

Theresa Gabriel  
 REGISTERED ELECTRICAL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 6-1-15

**CONDUIT**

NEW	EXISTING	
---	---	LIGHTING CONDUIT, UNLESS OTHERWISE INDICATED OR NOTED
---	---	TRAFFIC SIGNAL CONDUIT
---C---	---c---	COMMUNICATION CONDUIT
---T---	---t---	TELEPHONE CONDUIT
---F---	---f---	FIRE ALARM CONDUIT
---FO---	---fo---	FIBER OPTIC CONDUIT
---	---	CONDUIT TERMINATION
		CONDUIT RISER ATTACHED TO THE STRUCTURE OR SERVICE POLE

**SIGNAL EQUIPMENT**

NEW	EXISTING	
		PEDESTRIAN SIGNAL HEAD "C" INDICATES COUNTDOWN PEDESTRIAN HEAD
		PUSH BUTTON ASSEMBLY POST
		PEDESTRIAN BARRICADE
		VEHICLE SIGNAL HEAD (WITH BACKPLATE AND 3-SECTIONS: RED, YELLOW AND GREEN)
		VEHICLE SIGNAL HEAD WITH ANGLE VISOR
		MODIFICATIONS OF BASIC SYMBOL: "L" INDICATES ALL NON-ARROW SECTIONS LOUVERED "LG" INDICATES LOUVERED GREEN SECTION ONLY "PV" INDICATES ALL 12" SECTIONS PROGRAMMED VISIBILITY "8" INDICATES ALL 8" SECTIONS (ONLY WHEN SPECIFIED)
		VEHICLE SIGNAL HEAD CONSISTING OF RED, YELLOW AND GREEN LEFT ARROW SECTIONS
		VEHICLE SIGNAL HEAD CONSISTING OF RED AND YELLOW SECTIONS WITH AN UP GREEN ARROW SECTION
		VEHICLE SIGNAL HEAD (5 SECTION) CONSISTING OF RED, YELLOW AND GREEN SECTIONS WITH YELLOW AND GREEN RIGHT ARROW SECTIONS
		TYPE 15TS STANDARD WITH VEHICLE SIGNAL HEAD AND LUMINAIRE
		TYPE 21TS STANDARD WITH VEHICLE SIGNAL HEAD AND LUMINAIRE
		STANDARD WITH LUMINAIRE AND SIGNAL MAST ARMS AND ATTACHED VEHICLE SIGNAL HEADS
		TYPE 1 STANDARD WITH ATTACHED VEHICLE SIGNAL HEADS
		STANDARD WITH A SIGNAL MAST ARM, ATTACHED VEHICLE SIGNAL HEADS AND INTERNALLY ILLUMINATED STREET NAME SIGN
		CONTROLLER ASSEMBLY. DOOR INDICATES FRONT OF CABINET


**SIGNAL EQUIPMENT Cont**

NEW	EXISTING	
		GUARD POST
		TYPE 1 STANDARD WITH RAMP METERING SIGN
		OPTICAL DETECTOR FOR THE EMERGENCY VEHICLE DETECTION SYSTEM

**SERVICE EQUIPMENT**

NEW	EXISTING	
---OH---	---oh---	OVERHEAD LINES
		WOOD POLE, "U" INDICATES UTILITY OWNED
		POLE GUY WITH ANCHOR
		UTILITY TRANSFORMER - GROUND MOUNTED
		SERVICE EQUIPMENT ENCLOSURE TYPE. DOOR INDICATES FRONT OF ENCLOSURE
		TELEPHONE DEMARCATION CABINET

**POLE-MOUNTED SERVICE DESIGNATION**



**FLASHING BEACON**

NEW	EXISTING	
		FLASHING BEACON (ONE VEHICLE SIGNAL HEAD WITH BACKPLATE AND VISOR) "R" INDICATES RED INDICATION, "Y" INDICATES YELLOW INDICATION
		FLASHING BEACON WITH TYPE 15-FBS STANDARD AND A SIGN.
		FLASHING BEACON WITH TYPES 9, 9A OR 9B SIGN UNLESS OTHERWISE SPECIFIED OR INDICATED

**NOTES:**

- All signal sections shall be 12" unless shown otherwise.
- Signal heads shall be provided with backplates unless shown otherwise.

**ILLUMINATED OVERHEAD SIGN**

NEW	EXISTING	
		SINGLE POST, SINGLE ILLUMINATED SIGN, BALANCED BUTTERFLY
		SINGLE POST, DOUBLE ILLUMINATED SIGN, BALANCED BUTTERFLY
		SINGLE POST, SINGLE ILLUMINATED SIGN, FULL CANTILEVER
		DOUBLE POST, SINGLE ILLUMINATED SIGN
		SINGLE ILLUMINATED SIGN MOUNTED ON STRUCTURE
		DOUBLE POST, SINGLE ILLUMINATED SIGN WITH ELECTROLIER

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS  
(LEGEND AND ABBREVIATIONS)**

NO SCALE


RSP ES-1B DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN ES-1B DATED MAY 20, 2011 - PAGE 426 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-1B**


2010 REVISED STANDARD PLAN RSP ES-1B

### EQUIPMENT IDENTIFICATION


#### ILLUMINATED SIGN IDENTIFICATION NUMBER:

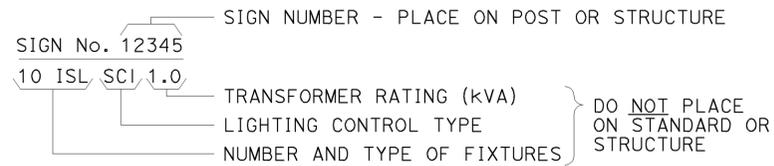


#### ELECTROLIER OR EQUIPMENT IDENTIFICATION NUMBER:

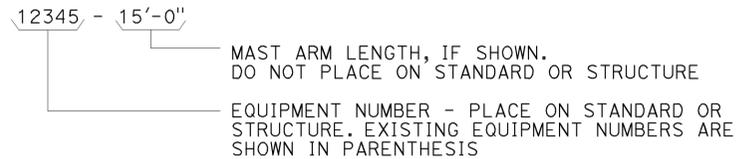


#### CONDUIT AND CONDUCTOR IDENTIFICATION:

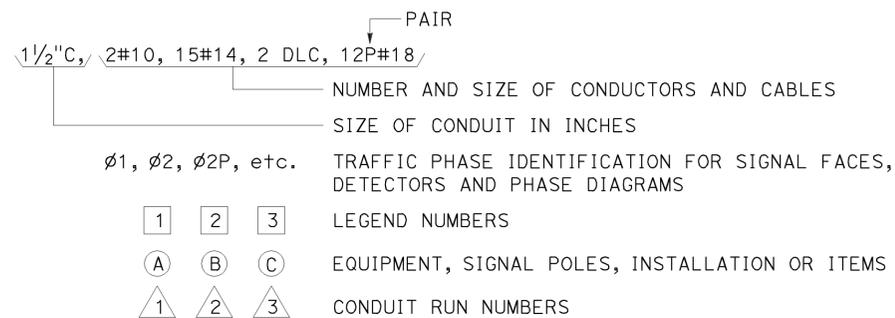


#### SIGNAL AND LIGHTING STANDARD (TYPICAL DESIGNATION):

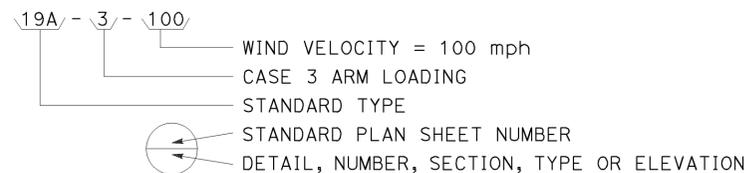


### MISCELLANEOUS EQUIPMENT

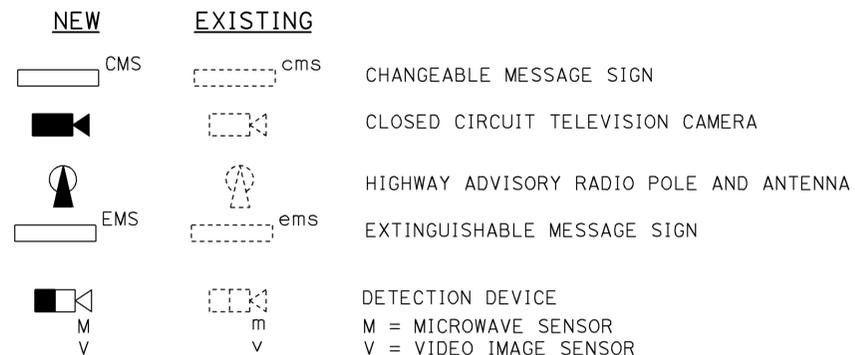



### WIRING DIAGRAM LEGEND

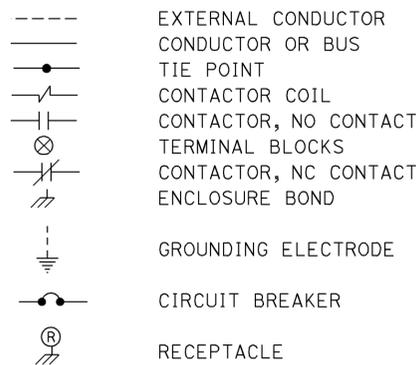

### PULL BOXES

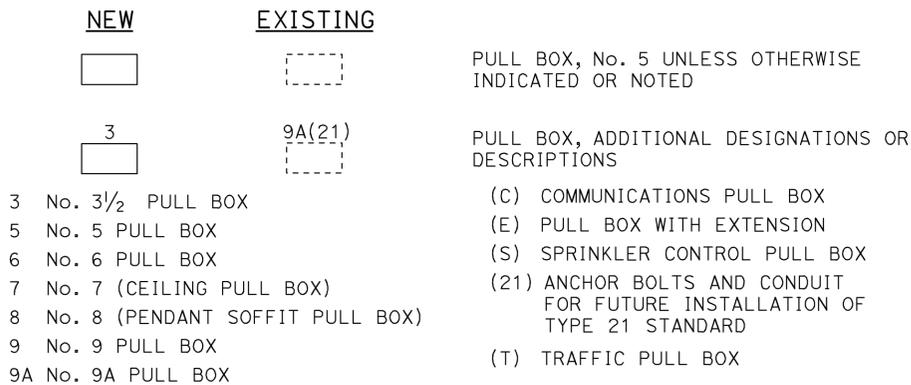

### VEHICLE DETECTORS

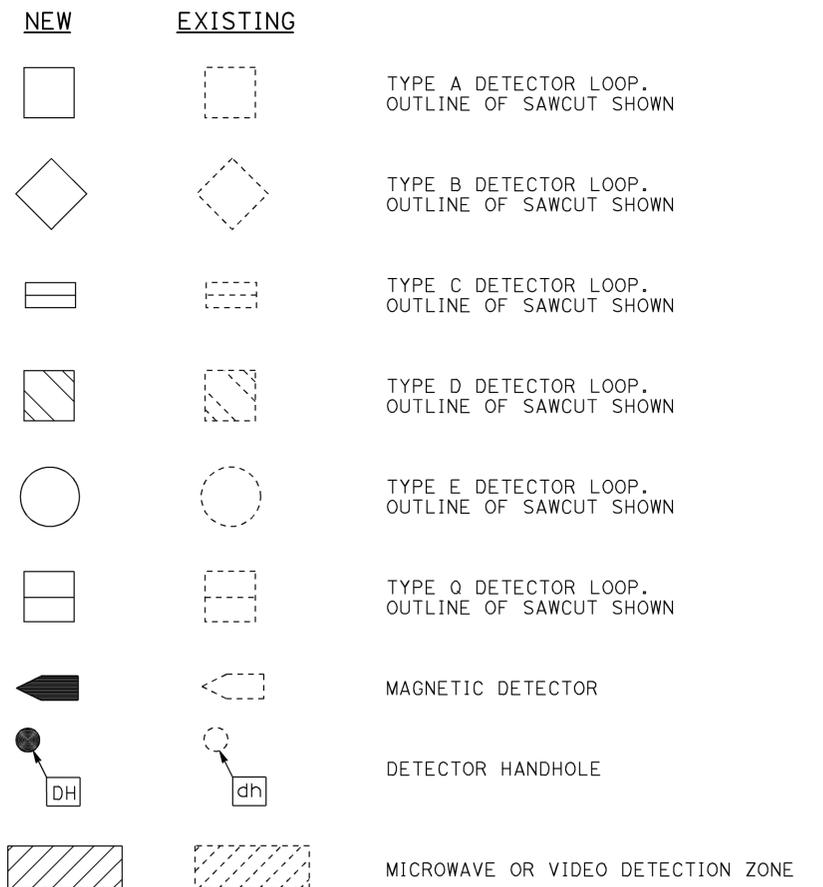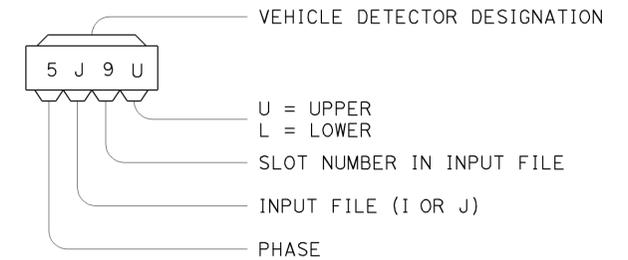

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


## ELECTRICAL SYSTEMS (LEGEND AND ABBREVIATIONS)

NO SCALE


RSP ES-1C DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN ES-1C DATED MAY 20, 2011 - PAGE 427 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-1C


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	258	265
<i>Theresa Gabriel</i> REGISTERED ELECTRICAL ENGINEER July 19, 2013 PLANS APPROVAL DATE <small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>					
TO ACCOMPANY PLANS DATED <u>6-1-15</u>					

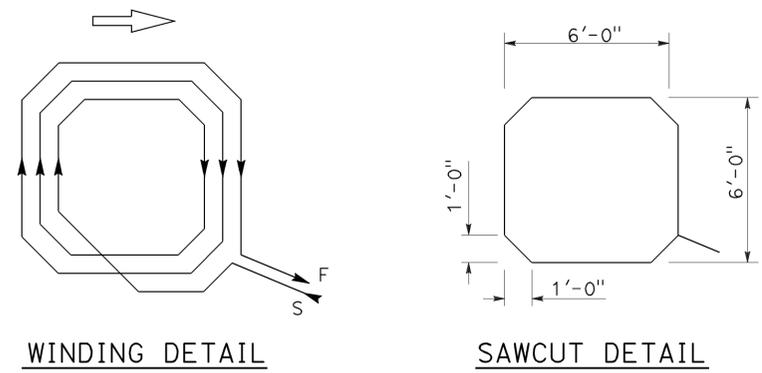


WINDING DETAIL  
SAWCUT DETAIL  
**TYPE A LOOP DETECTOR CONFIGURATION**

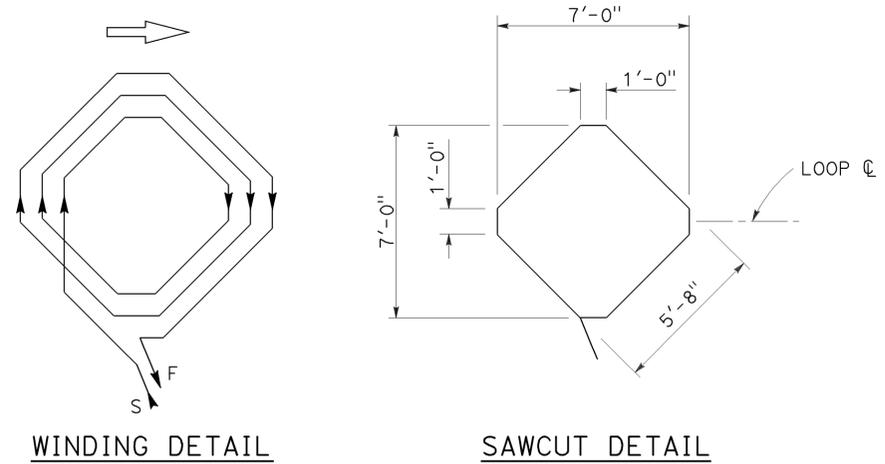


WINDING DETAIL  
SAWCUT DETAIL  
**TYPE B LOOP DETECTOR CONFIGURATION**

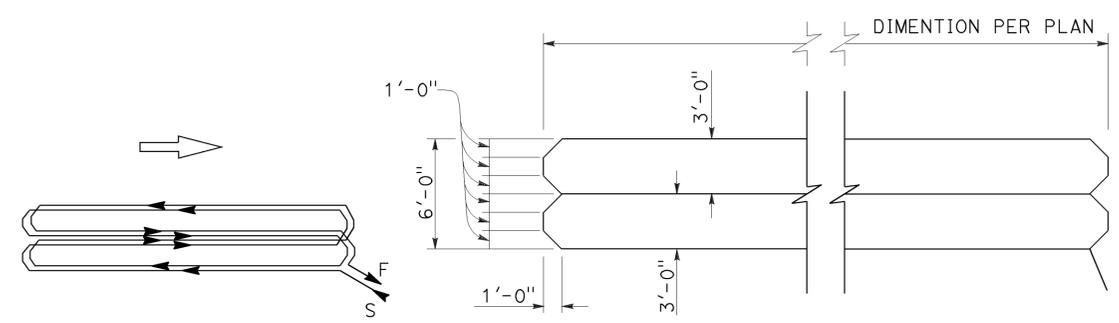


WINDING DETAIL  
SAWCUT DETAIL  
**TYPE C LOOP DETECTOR CONFIGURATION**

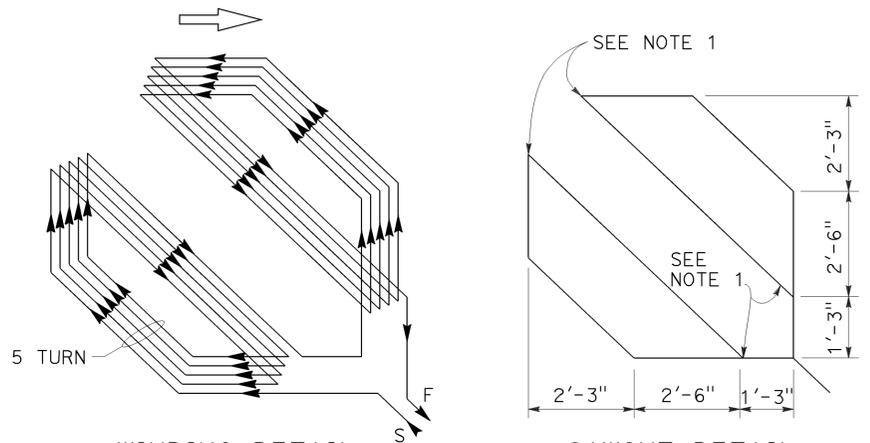


WINDING DETAIL  
SAWCUT DETAIL  
**TYPE D LOOP DETECTOR CONFIGURATION**

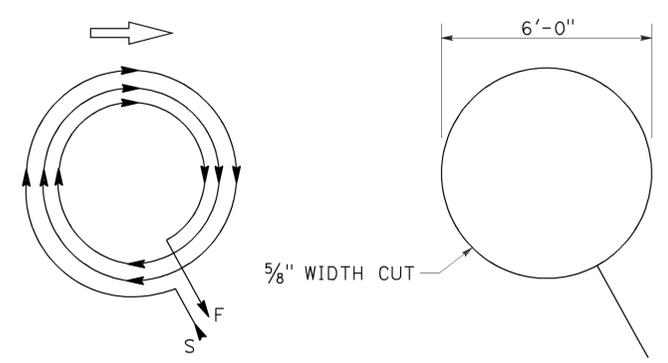

WINDING DETAIL  
SAWCUT DETAIL  
**TYPE E LOOP DETECTOR CONFIGURATION**

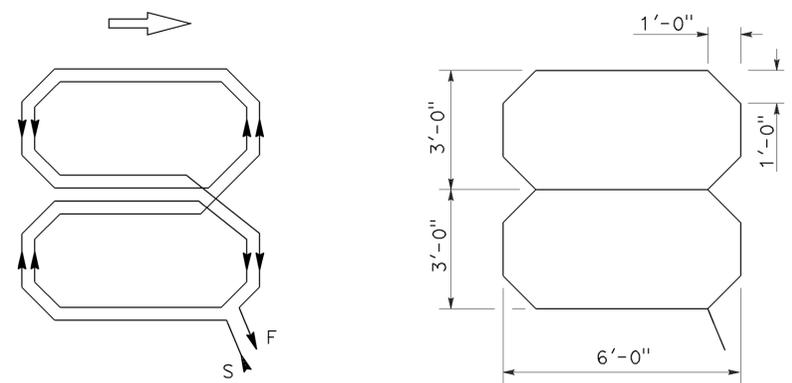

WINDING DETAIL  
SAWCUT DETAIL  
**TYPE Q LOOP DETECTOR CONFIGURATION**

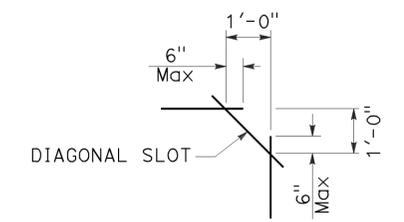

**PLAN VIEW OF DIAGONAL SLOT AT CORNERS**

- NOTES:**
1. Round corners of acute angle sawcuts to prevent damage to conductors.
  2. Typical distance separating loops from edge to edge is 10' for Type A, B, D and E installation in single lane.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS (DETECTORS)**  
NO SCALE

RSP ES-5B DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN ES-5B DATED MAY 20, 2011 - PAGE 449 OF THE STANDARD PLANS BOOK DATED 2010.


**2010 REVISED STANDARD PLAN RSP ES-5B**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	259	265


Theresa Gabriel  
 REGISTERED ELECTRICAL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.




TO ACCOMPANY PLANS DATED 6-1-15

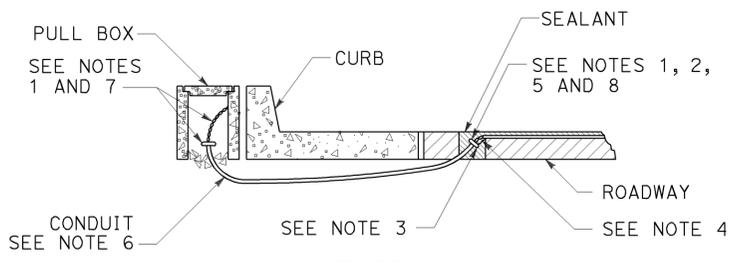


**TYPE A**  
**CURB TERMINATION DETAIL**

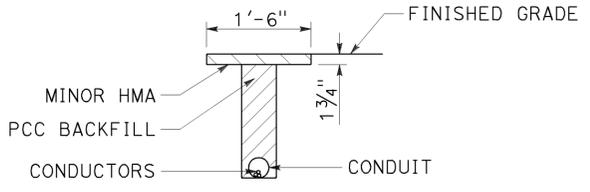


**"T" TRENCH**  
**DETAIL I**

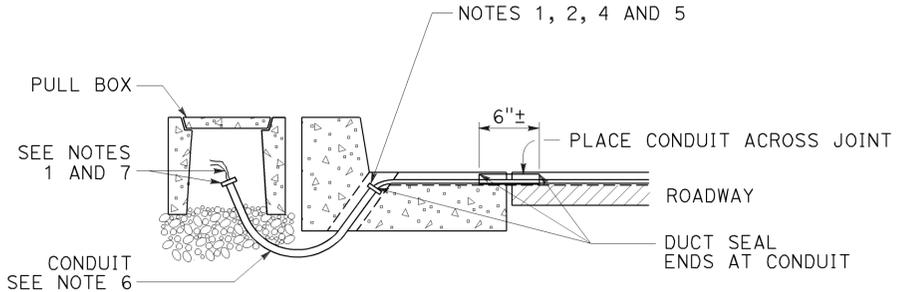

**CROSS SECTION**

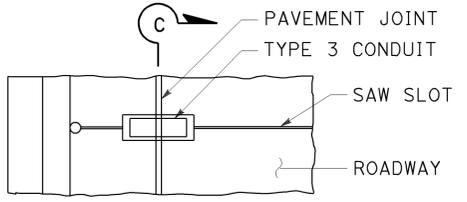


**PLAN VIEW**

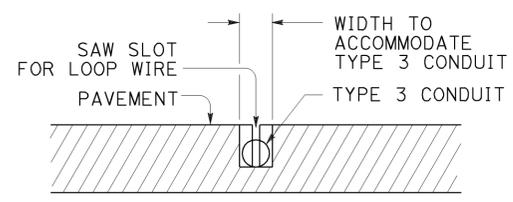


**SECTION C-C**


**TYPE B**  
**CURB TERMINATION DETAIL**

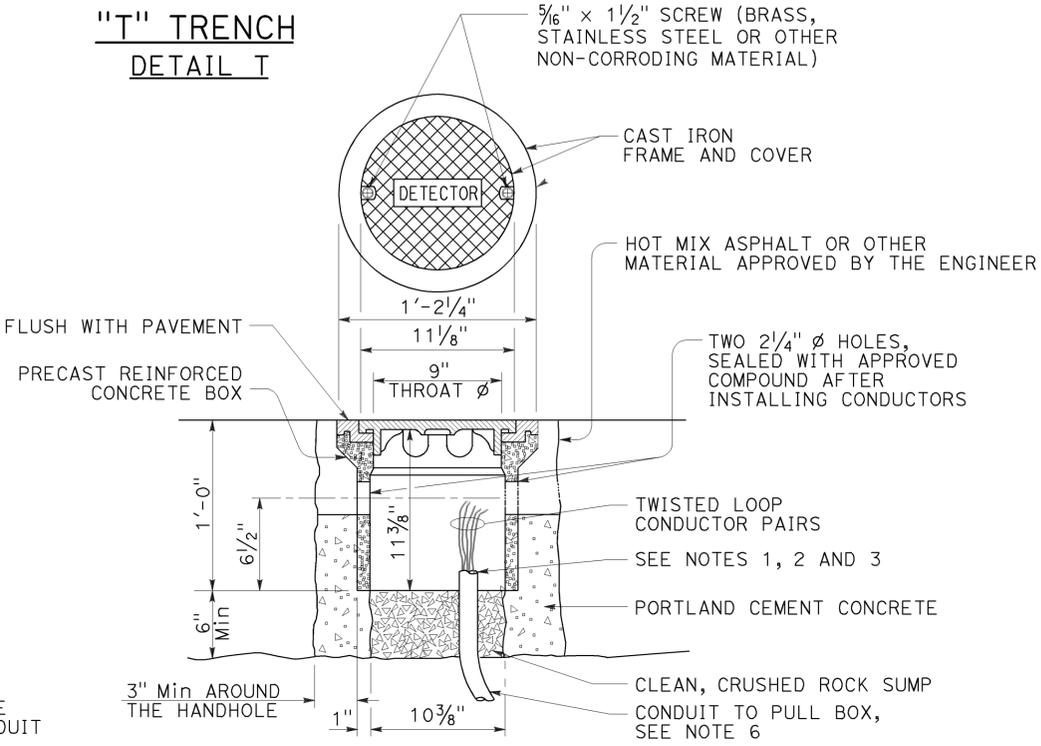


**DETECTOR HANDHOLE DETAIL**

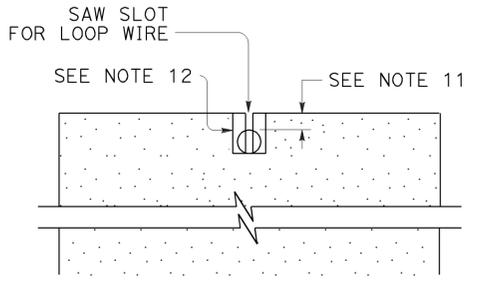


**SECTION A-A**

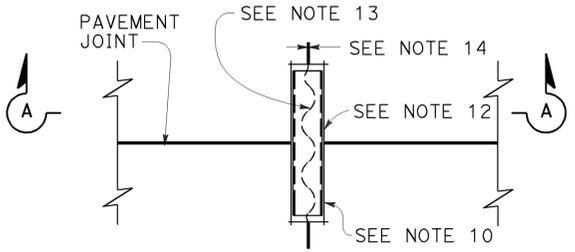


**PLAN VIEW**  
**TYPICAL LOOP LEAD-IN DETAIL**  
**AT PAVEMENT JOINT**

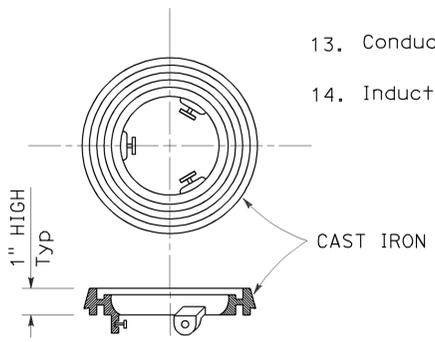

**LOCKING GRADE RING**

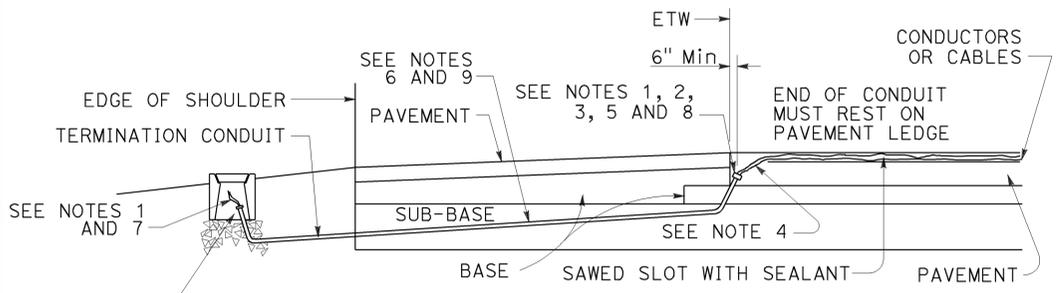

**CROSS SECTION**

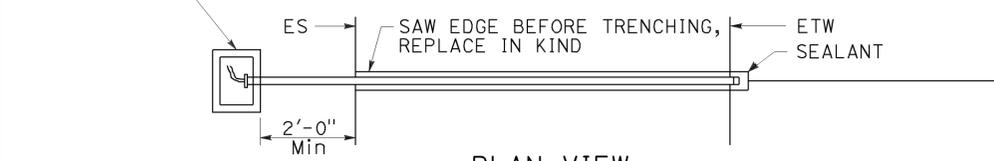

**PLAN VIEW**  
**SHOULDER TERMINATION DETAILS**

**NOTES:**

- Bushing shall be used at end of conduit.
- Tape detector conductors or cables 3" each side of bushings.
- Install duct seal compound to each end of termination conduit before installing sealant.
- Round all sharp edges where detector conductors or cables have to pass.
- End of conduit shall be 3/8" below roadway surface.
- Conduit size      Loop conductors  
   1"C minimum      1 to 2 pairs  
   1 1/2"C minimum    3 to 4 pairs  
   2"C minimum      5 or more pairs
- Splice detector conductors or cables to detector lead-in-cable.
- Location of detector handhole when shown on plans.
- When the shoulder and traveled way are paved with the same material and there is no joint between them, the conduit shall extend only 2'-0" into the shoulder pavement.
- 3/4"C, Type 3 conduit 6" long minimum, plug both ends with duct compound to keep out sealant.
- 1/2" Minimum between top of conduit and pavement surface.
- Sawcut shall not exceed 1" in width and 1/8" longer than conduit to be installed.
- Conductors with 1/2" minimum slack inside conduit.
- Inductive loop detector saw slot.


STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(CURB TERMINATION**  
**AND HANDHOLE)**  
NO SCALE

RSP ES-5D DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN ES-5D DATED MAY 20, 2011 - PAGE 451 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-5D**

2010 REVISED STANDARD PLAN RSP ES-5D

TO ACCOMPANY PLANS DATED 6-1-15

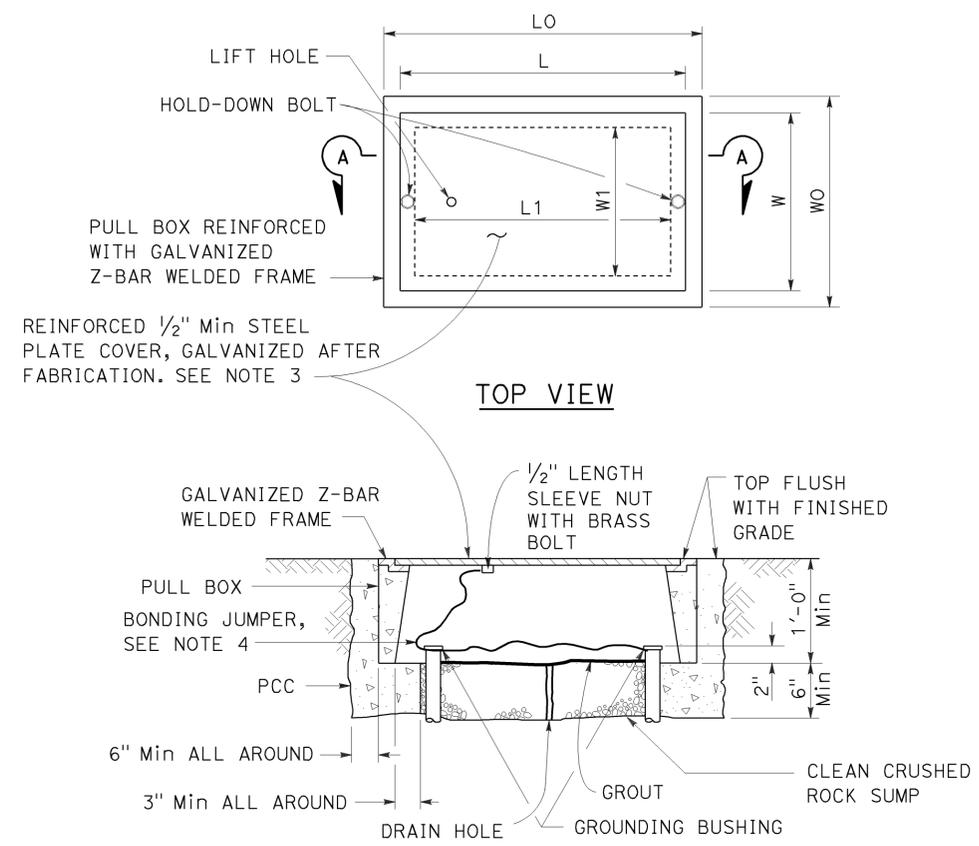

**SECTION A-A**  
**No. 3 1/2(T), No. 5(T) AND**  
**No. 6(T) TRAFFIC PULL BOX**

**NOTES:**

- Traffic pull box shall be provided with steel cover and special concrete footing. Steel cover shall have embossed non-skid pattern.
- Steel reinforcing shall be as regularly used in the standard products of the respective manufacturer.
- Pull box covers shall be marked as follows: "SERVICE" Service circuits between service point and service disconnect; "SPRINKLER-CONTROL" Sprinkler control circuits, 50 V or less; "CALTRANS" On all pull boxes, except pull boxes marked "SPRINKLER-CONTROL"; and "TELEPHONE" Telephone service.
  - No. 3 1/2(T) pull box.
    - "SIGNAL" - Traffic signal circuits with or without lighting or sign lighting circuits.
    - "LIGHTING" - Lighting or sign lighting circuits where voltage is under 600 V.
  - No. 5(T) or 6(T) pull box.
    - "TRAFFIC SIGNAL" - Traffic signal circuits with or without lighting or sign lighting circuits.
    - "LIGHTING" - Lighting or sign lighting circuits where voltage is under 600 V.
    - "LIGHTING-HIGH VOLTAGE" - Lighting or sign lighting circuits where voltage is above 600 V.
    - "IRRIGATION" - Circuits to irrigation controller 120 V or more.
    - "RAMP METER" - Ramp meter circuits.
    - "COUNT STATION" - Count or speed monitor circuits.
    - "COMMUNICATION" - Communication circuits.
    - "TOS COMMUNICATIONS" - TOS communications line.
    - "TOS POWER" - TOS power.
    - "TDC POWER" - Telephone demarcation cabinet power.
    - "CCTV" - Closed circuit television circuits.
    - "TMS" - Traffic monitoring station circuits.
    - "CMS" - Changeable message sign circuits.
    - "HAR" - Highway advisory radio circuits.
    - "BOOSTER PUMP" - Booster pump circuit.
- Bonding jumper for metal covers shall be 3' long, minimum.
- The nominal dimensions of the opening in which the cover sets shall be the same as the cover dimensions except the length and width dimensions shall be 1/8" greater.
- Covers and boxes shall be interchangeable with California standard male and female gages. When interchanged with a standard male or female gage, the top surfaces shall be flush within 1/8".

PULL BOX	PULL BOX						COVER				
	MINIMUM * THICKNESS	MINIMUM DEPTH BOX AND EXTENSION	W0	L0	L1	W1	L **	W **	R	EDGE THICKNESS	EDGE TAPER
No. 3 1/2(T)	1 1/2"	1'-0"	1'-5"± 1"	1'-8 3/8"±	1'-2 1/2"±	10 5/8"± 1"	1'-8"±	1'-1 3/4"±	0"	1/2"	NONE
No. 5(T)	1 3/4"	1'-0"	1'-11 1/2"± 1"	2'-5 1/2"±	1'-7"±	1'-1"± 1"	2'-3"±	1'-4"±	0"	1/2"	NONE
No. 6(T)	2"	1'-0"	2'-6"± 1"	2'-11 1/2"±	1'-11 1/2"±	1'-5"± 1"	2'-9"±	1'-8"±	0"	1/2"	NONE

\* EXCLUDING CONDUIT WEB      \*\* TOP DIMENSION

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(TRAFFIC PULL BOX)**  
 NO SCALE

RSP ES-8B DATED JULY 19, 2013 SUPERSEDES RSP ES-8B DATED JANUARY 20, 2012 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-8B





DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	263	265

*John J. Lane* 05-01-15  
 REGISTERED CIVIL ENGINEER DATE

6-1-15  
 PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER  
 JOHN J. LANE  
 No. C55042  
 Exp. 06-30-16  
 CIVIL  
 STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of scanned copies of this plan sheet.

JOINT SEAL TABLE								
Bridge Name	Bridge No.	Location		Min "MR" (in)	Approx Length (ft)	Exist Waterstop (Y/N)	Approx Depth to Clean Expansion Joint (in)	Paving Notch Extension (Y/N)
		Abut	PN					
HOSPITAL CREEK (SB)	29-0171R	Abut 1	PN	1/2	51	N	12	Y
		Abut 6	PN	1/2	51	N	12	Y
HOSPITAL CREEK (NB)	29-0171L	Abut 1	PN	1/2	51	N	12	Y
		Abut 6	PN	1/2	51	N	12	Y
LONE TREE CREEK (SB)	29-0141R	Abut 1	PN	1/2	51	N	12	Y
		Abut 5	PN	1/2	51	N	12	Y
LONE TREE CREEK (NB)	29-0141L	Abut 1	PN	1/2	51	N	12	Y
		Abut 5	PN	1/2	51	N	12	Y
CORRAL HOLLOW CREEK (SB)	29-0081R	Abut 1	PN	1/2	42	N	12	Y
		Abut 4	PN	1/2	42	N	12	Y
CORRAL HOLLOW CREEK (NB)	29-0081L	Abut 1	PN	1/2	42	N	12	Y
		Abut 4	PN	1/2	42	N	12	Y

PN = Paving Notch  
 Note: All Joint Seals shall be Type A, unless otherwise noted.

HOSPITAL CREEK	BRIDGE NO. 29-0171R/L
QUANTITIES	
AGGREGATE BASE (APPROACH SLAB)	31 CY
STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R)	311 CY
PAVING NOTCH EXTENSION	153 CF
JOINT SEAL (MR/2")	204 LF
LONE TREE CREEK	BRIDGE NO. 29-0141R/L
QUANTITIES	
REMOVE ASPHALT CONCRETE SURFACING	2,028 SQFT
PREPARE CONCRETE BRIDGE DECK SURFACE	2,028 SQFT
TREAT BRIDGE DECK	2,028 SQFT
FURNISH BRIDGE DECK TREATMENT MATERIAL	25 GAL
AGGREGATE BASE (APPROACH SLAB)	31 CY
STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R)	308 CY
PAVING NOTCH EXTENSION	154 CF
JOINT SEAL (MR/2")	204 LF
CORRAL HOLLOW CREEK	BRIDGE NO. 29-0081R/L
QUANTITIES	
AGGREGATE BASE (APPROACH SLAB)	26 CY
STRUCTURAL CONCRETE, APPROACH SLAB (TYPE R)	257 CY
PAVING NOTCH EXTENSION	127 CF
JOINT SEAL (MR/2")	168 LF

### GENERAL NOTES (LOAD AND RESISTANCE FACTOR DESIGN)

DESIGN: AASHTO LRFD Bridge Design Specifications, Fourth Edition with Caltrans amendment preface dated November 2011.  
 LIVE LOADING: HL-93 Design Truck and Tandem, and P-15 Lane Deck Permit Design Load.  
 CONCRETE:  $f_y = 60,000$  psi  
 $f'_c = 3,600$  psi  
 $n = 9$

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">DESIGN</td> <td style="width: 33%;">BY J. Lane</td> <td style="width: 33%;">CHECKED J. Sandhu</td> </tr> <tr> <td>DETAILS</td> <td>BY L. Xiong</td> <td>CHECKED J. Lane</td> </tr> <tr> <td>QUANTITIES</td> <td>BY J. Lane</td> <td>CHECKED C. Paclibar</td> </tr> </table>	DESIGN	BY J. Lane	CHECKED J. Sandhu	DETAILS	BY L. Xiong	CHECKED J. Lane	QUANTITIES	BY J. Lane	CHECKED C. Paclibar	<b>STATE OF CALIFORNIA</b> DEPARTMENT OF TRANSPORTATION	DIVISION OF ENGINEERING SERVICES STRUCTURE DESIGN <b>DESIGN BRANCH 14</b>	BRIDGE NO. Varies POST MILE Varies	<b>ROUTE 580 JOINT SEAL &amp; APPROACH SLAB REPLACEMENT</b> <b>JOINT SEAL TABLE</b>
DESIGN	BY J. Lane	CHECKED J. Sandhu											
DETAILS	BY L. Xiong	CHECKED J. Lane											
QUANTITIES	BY J. Lane	CHECKED C. Paclibar											
STRUCTURES DESIGN DETAIL SHEET (ENGLISH) (REV. 09-01-10)		ORIGINAL SCALE IN INCHES FOR REDUCED PLANS 0 1 2 3	UNIT: 3613 PROJECT NUMBER & PHASE: 10140001701 CONTRACT NO.: 10-001704		DISREGARD PRINTS BEARING EARLIER REVISION DATES								
				REVISION DATES 5-5-15 08-15-15 08-14-15 4-28-15	SHEET 2 OF 4								




USERNAME => s118789 DATE PLOTTED => 22-JUL-2015 TIME PLOTTED => 15:28

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132,580	0.2, L0.0/15.3	264	265

**John J. Lane**  
 REGISTERED CIVIL ENGINEER 05-01-15  
 DATE  
 6-1-15  
 PLANS APPROVAL DATE







REGISTERED PROFESSIONAL ENGINEER  
 JOHN J. LANE  
 No. C55042  
 Exp. 06-30-16  
 CIVIL  
 STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

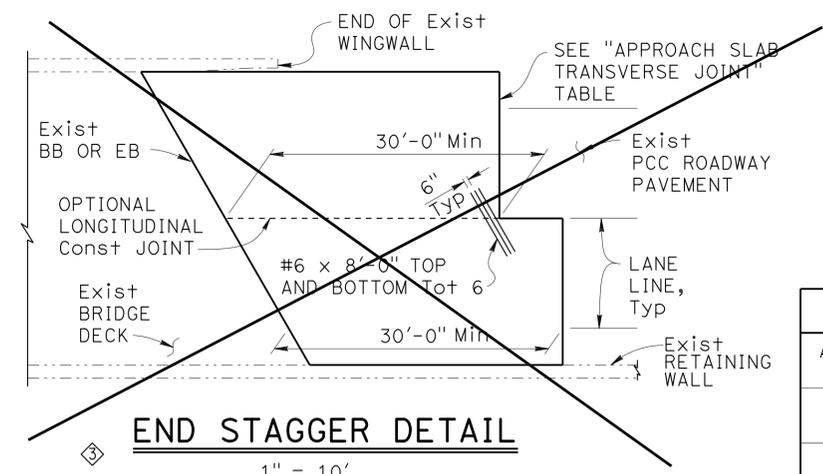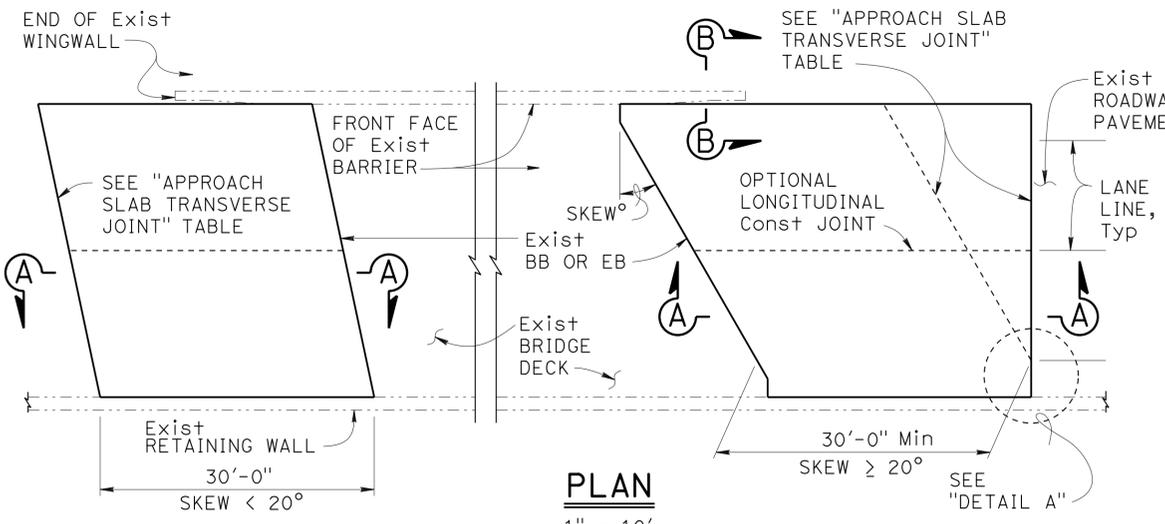

**APPROACH SLAB TRANSVERSE JOINT**

APPROACH SKEW	WITH HMA ROADWAY PAVEMENT	WITH PCC ROADWAY PAVEMENT
< 20°	PARALLEL TO BB OR EB	PARALLEL TO BB OR EB
20° - 45°	PARALLEL TO BB OR EB USE "DETAIL A"	STAGGER AT LANE LINES 24' TO 36' APART, SEE "END STAGGER DETAIL"
> 45°	PARALLEL TO BB OR EB USE "DETAIL A"	STAGGER AT EACH LANE LINE, SEE "END STAGGER DETAIL"

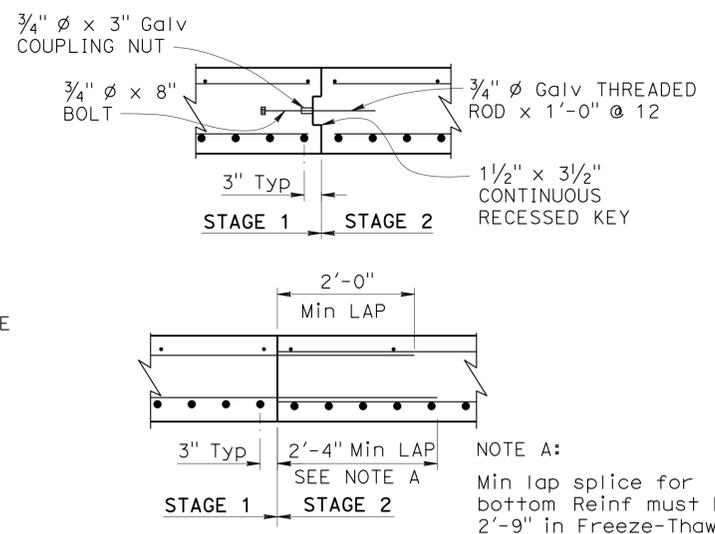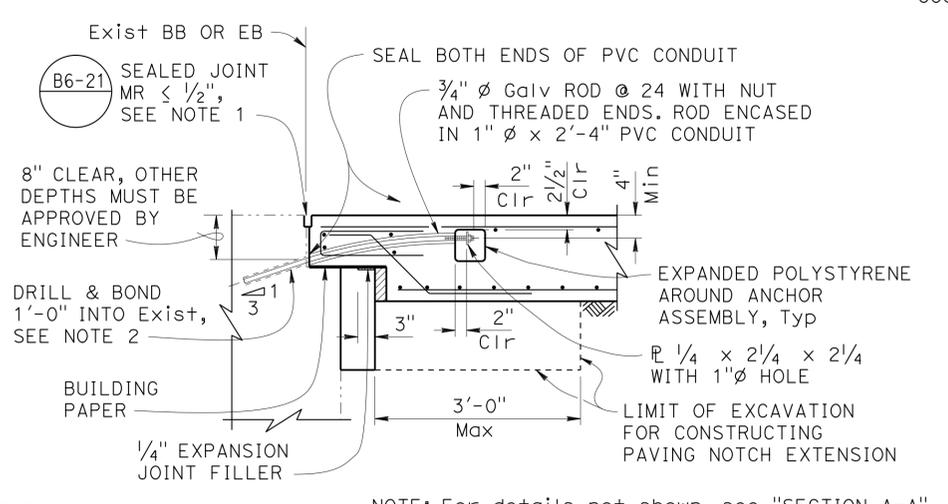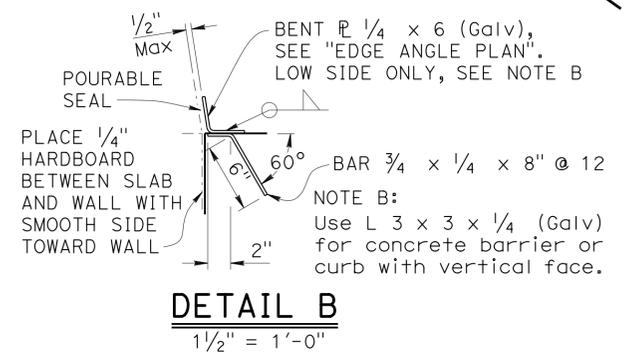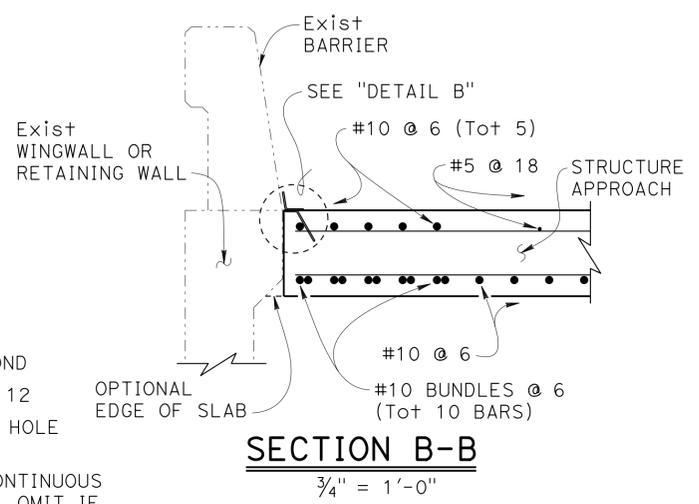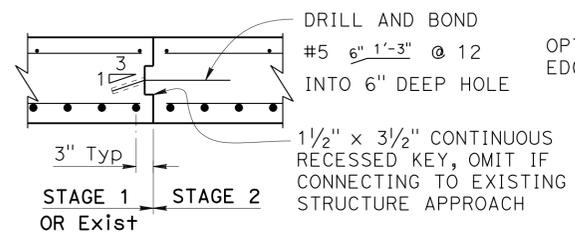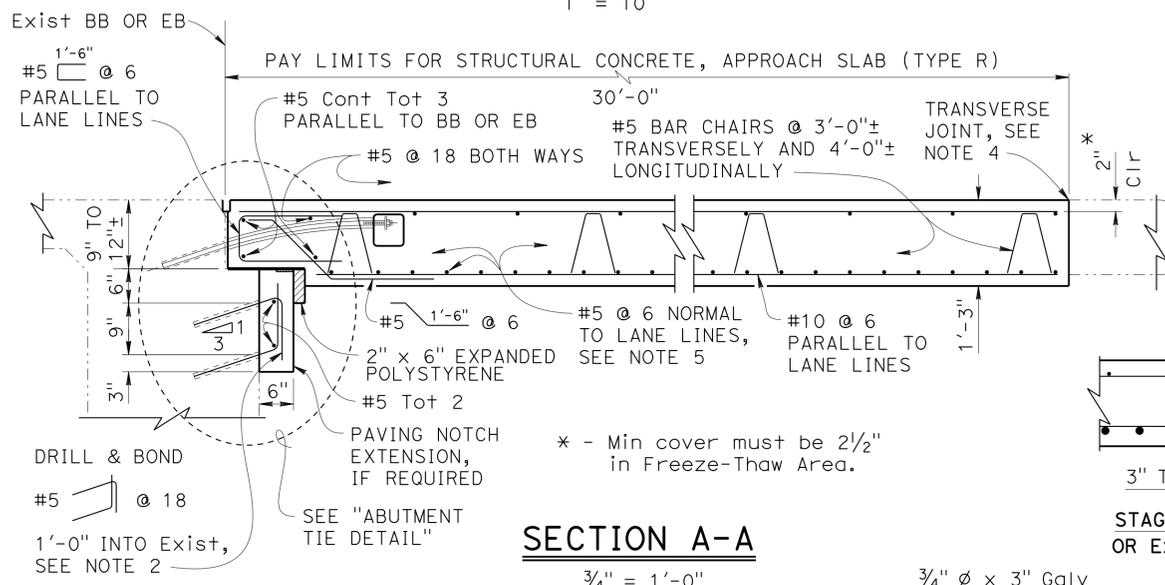

**DESIGN NOTES**

DESIGN: AASHTO LRFD Bridge Design Specifications, 2012 Edition with Caltrans Amendments, preface dated January 2014

LIMIT STATES: Service I, Strength I & II, Extreme II and Fatigue I (γ<sub>FAT</sub> = 1.0)

DEAD LOAD: Includes 35 psf for future wearing surface

LIVE LOAD: HL93 and permit design load  
Equivalent strip width method: W<sub>1</sub> = 12 ft  
Slab span: L<sub>1</sub> = 24.5 ft

REINFORCED CONCRETE:  
f<sub>y</sub> = 60 ksi  
f'c = 3.6 ksi  
n = 8

- NOTES:**
- For details not shown, see other plan sheets. Adjust reinforcement to clear sawcut for sealed joint.
  - Space reinforcement to avoid existing prestress anchorages and other abutment reinforcement.
  - End the plate or edge angle at beginning of barrier transition, end of wingwall, or end of structure approach as applicable.
  - Transverse joint must be a minimum of 5'-0" from an existing or constructed weakened plane joint in approach PCC roadway pavement. Refer to Standard Plans P10 and P14.
  - At the Contractor's option, approach slab transverse reinforcement may be placed parallel to BB or EB. Spacing of transverse reinforcement is measured along C roadway.
- Indicates Existing Structure

**NOTE:**  
The contractor must verify all controlling field dimensions before ordering or fabricating any material.

**NOTE:** For details not shown, see "SECTION A-A".

**STANDARD DRAWING**

FILE NO. **xs3-150**

APPROVAL DATE January 2015

Deleted Detail

**STATE OF CALIFORNIA**  
DEPARTMENT OF TRANSPORTATION

**DIVISION OF ENGINEERING SERVICES**



**ROUTE 580 JOINT SEAL & APPROACH SLAB REPLACEMENT**  
**STRUCTURE APPROACH TYPE R (30D)**

BRIDGE NO.	Varies
POST MILE	Varies

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
10	SJ	132, 580	0.2, L0.0/15.3	265	265

John J. Lane  
 REGISTERED CIVIL ENGINEER DATE 04-13-15  
 6/01/2015  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of scanned copies of this plan sheet.

BRIDGE TABLE									
	Bridge Name	PM	Bridge Number	BB to EB Length (ft)	TYPE	MR and Joint Seal Type	Hinge	No. of Span	Type of Barrier
1	GAFFERY RD. U.C.	0.23	29 0227L/R	92'4"	CONCRETE SLAB	1/2" TYPE A	NO	3	TYPE 1
2	HOSPITAL CR. BRIDGE	0.48	29 0171L/R	133'	CONCRETE SLAB	1/2" TYPE A	NO	5	TYPE 1
3	LONE TREE CREEK BR.	1.7	29 0141L/R	104'	CONCRETE SLAB	1/2" ASPHALTIC PLUG	NO	4	TYPE 1
4	CORRAL HOLLOW CR. BRIDGE	7.88	29 0081L/R	126'	CONCRETE "T"	1/2" TYPE A	NO	3	TYPE 1
5	VALPICO U.C.	9.71	29 0165L/R	74'	CONCRETE SLAB	1/2" TYPE A	NO	3	TYPE 1
6	VALLEY VIEW U.C.	11.3	29 0164L/R	82'	CONCRETE SLAB	1/2" TYPE A	NO	3	TYPE 1
7	WEST VALPICO RR-OH	11.51	29 0083L/R	181'6"	BOX GRDR	1" TYPE A	NO	3	TYPE 1
8	HANSEN RD. U.C.	12.03	29 0172L/R	68'4"	CONCRETE SLAB	1/2" TYPE A	NO	3	TYPE 1
9	EAST MIDWAY RR-OH	12.75	29 0082L/R	276'6"	BOX GRDR	2-1/2" TYPE A	NO	3	TYPE 1

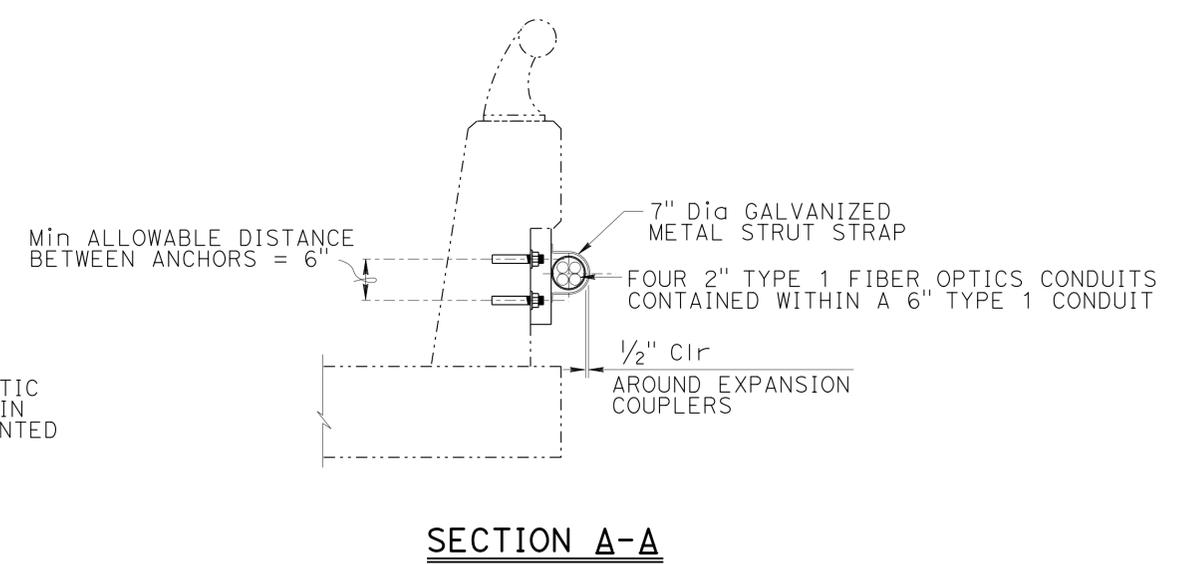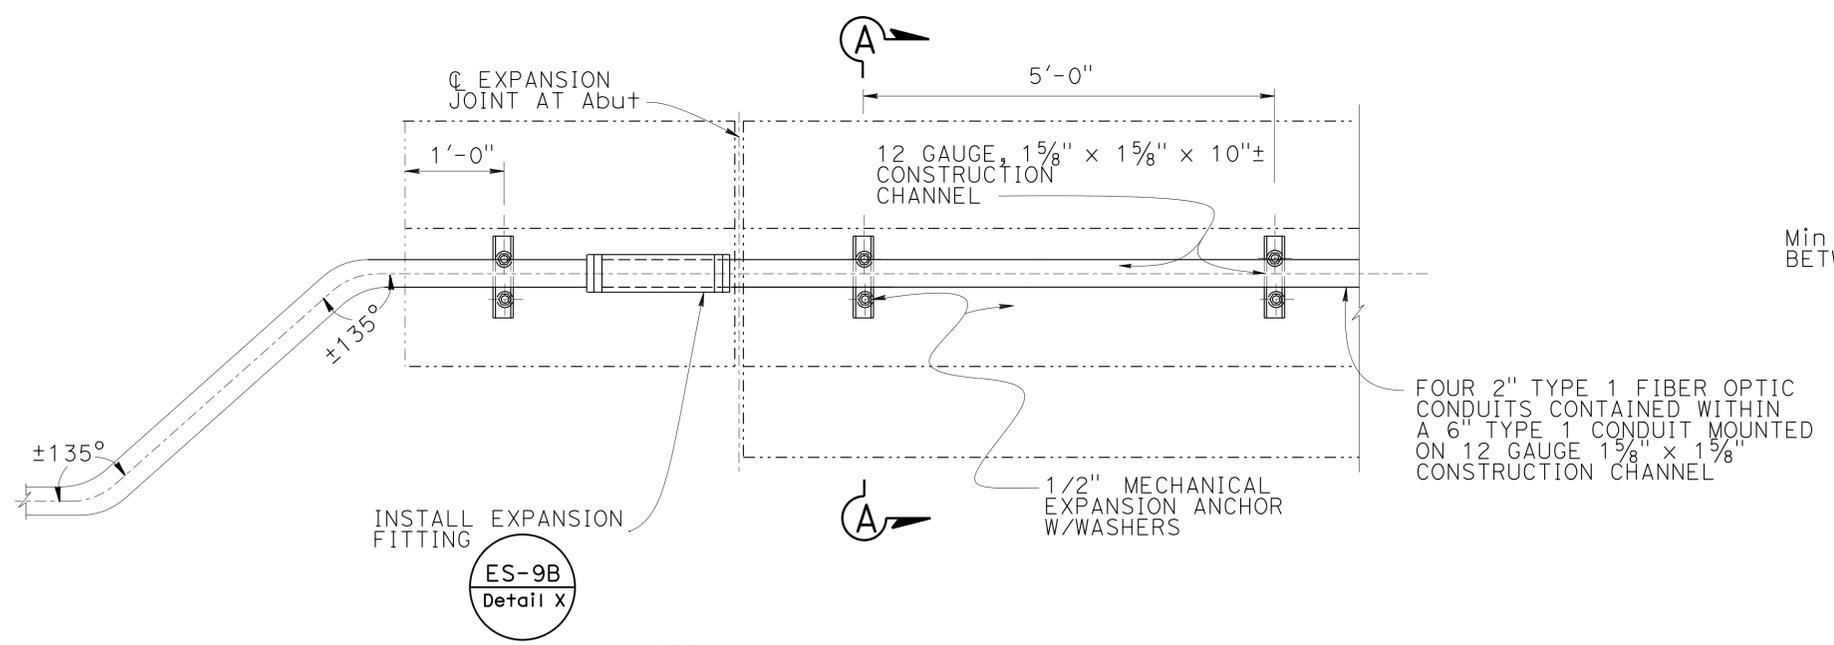

NOTE:  
1. Shown is Type 1 Barrier Installation

**CONDUIT COVER DETAIL**  
No Scale

**ELEVATION**  
No Scale

DESIGN BY J. Lane CHECKED J. Sandhu DETAILS BY L. Xiong CHECKED J. Lane QUANTITIES BY J. Lane CHECKED C. Paclibar	STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION	DIVISION OF ENGINEERING SERVICES STRUCTURE DESIGN DESIGN BRANCH 14	BRIDGE NO. Varies POST MILE Varies	<b>ROUTE 580 JOINT SEAL &amp; APPROACH SLAB REPLACEMENT</b> <b>FIBER OPTIC CONDUIT CONN.</b>
	ORIGINAL SCALE IN INCHES FOR REDUCED PLANS 0 1 2 3	UNIT: 3613 PROJECT NUMBER & PHASE: 10140001701 CONTRACT NO.: 10-0017U1	DISREGARD PRINTS BEARING EARLIER REVISION DATES	REVISION DATES 05-29-15 11-15 02-12-15 04-13-15 SHEET 4 OF 4
	STRUCTURES DESIGN DETAIL SHEET (ENGLISH) (REV. 09-01-10)			