


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS


William K. Farnbach
 REGISTERED CIVIL ENGINEER
 No. C49042
 Exp. 9-30-14
 CIVIL
 STATE OF CALIFORNIA

July 19, 2013
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED _____

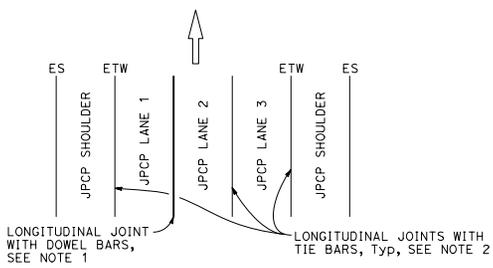


3 LANES WITH CONCRETE SHOULDERS
PLAN

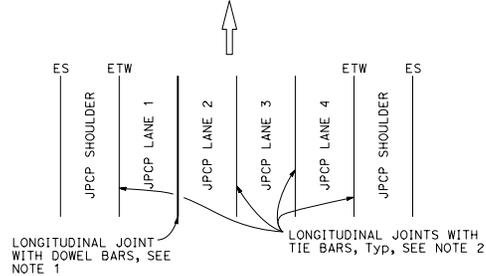


4 LANES WITH CONCRETE SHOULDERS
PLAN

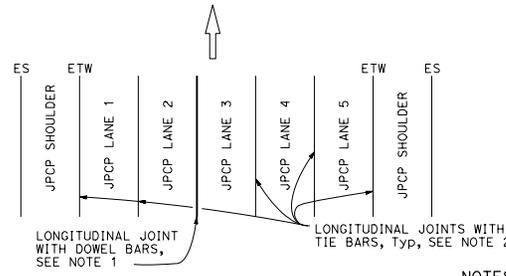

5 LANES WITH CONCRETE SHOULDERS
PLAN

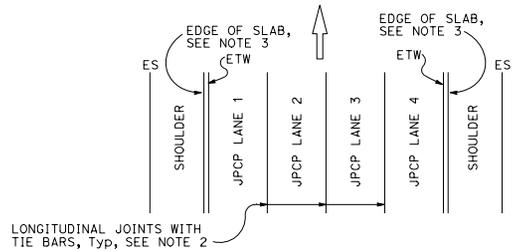


4 LANES OR LESS WITH AC SHOULDERS
PLAN

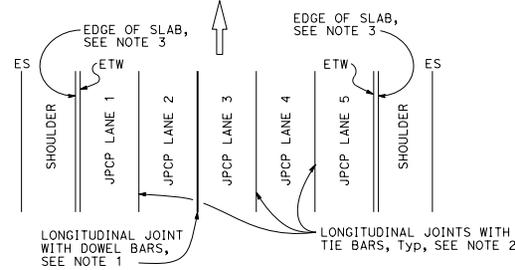


5 LANES WITH AC SHOULDERS
PLAN

NEW CONSTRUCTION
Location of Longitudinal Joints For JPCP

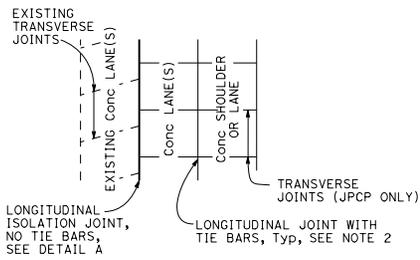


CASE 1
PLAN

Transverse Joints do not align between new and existing.

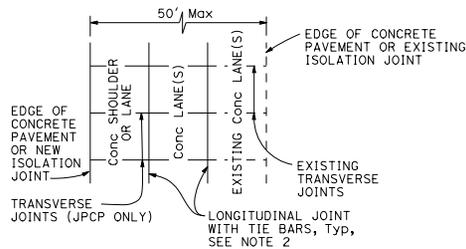

CASE 2
PLAN

Transverse Joints align between new and existing. (For JPCP only)

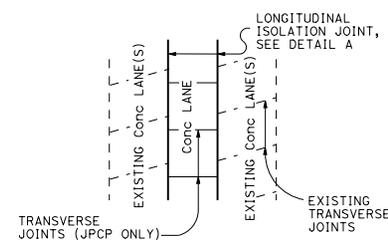


CASE 3 (INTERIOR LANE REPLACEMENT)
PLAN

Transverse Joints do not align between new and existing.

LANE/SHOULDER ADDITION OR RECONSTRUCTION
For JPCP and CRCP

NOTES:

- See Revised Standard Plan RSP P10 for longitudinal joint with dowel bars.
- See Revised Standard Plan RSP P15 for longitudinal joint with tie bars.
- S = Reservoir depth.
 $S = 7/8" \pm 1/16"$ for asphalt rubber seals
 $S = 3/8" \pm 1/16"$ for silicone seals
 Preformed compression seals must be $3/8"$ wide and $S = 1 1/8" \pm 1/16"$

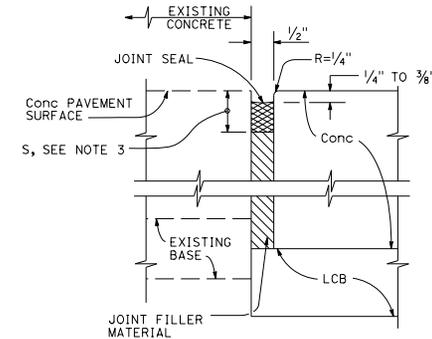

DETAIL "A"
ISOLATION JOINT

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**CONCRETE PAVEMENT
LANE SCHEMATICS
AND ISOLATION JOINT DETAIL**
NO SCALE

RSP P18 DATED JULY 19, 2013 SUPERSEDES RSP P18 DATED APRIL 20, 2012 AND STANDARD PLAN P18 DATED MAY 20, 2011 - PAGE 135 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP P18