

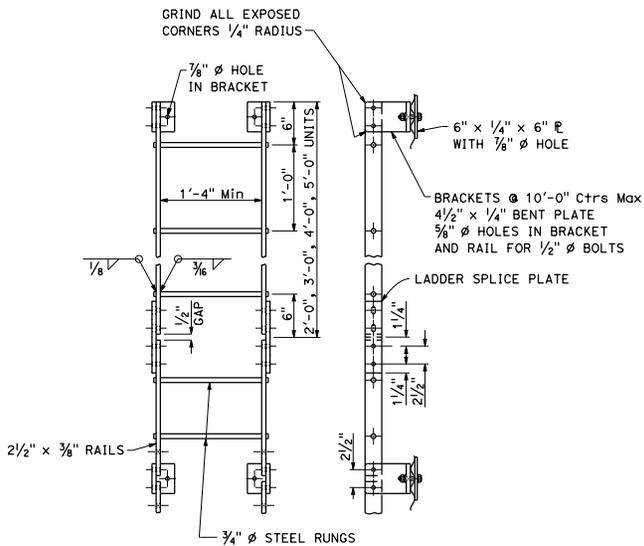


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
 REGISTERED CIVIL ENGINEER October 30, 2015 PLANS APPROVAL DATE No. C61257 Exp. 6-30-17 CIVIL STATE OF CALIFORNIA					
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.					

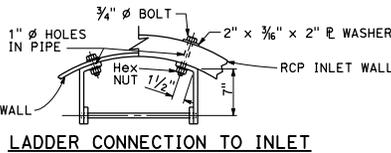


LADDER DETAILS
See Notes 1, 2, 3 and 4




LADDER CONNECTION TO INLET

NOTES:

1. Ladders and Steps - None required where "H" dimension of pipe inlet is less than 2'-6". Where "H" is 2'-6" or more, install steps or ladder with lowest rung not more than 1'-0" above the floor and highest rung not more than 1'-0" below top of inlet. The distance between steps or rungs shall not exceed 1'-0" and shall be uniform throughout the length of the wall. Place steps or ladder in the wall without an opening.
2. Ladder may be constructed in one length at contractor's option on RCP inlet.
3. On CSP inlet, connect ladder splice plate so joint can compress 1/2".
4. Ladder splice plate to be connected with 1/2" bolts with double nuts.
5. Trash racks used on Type OCPI and OMPI inlets. Trash racks required for pumping installations.

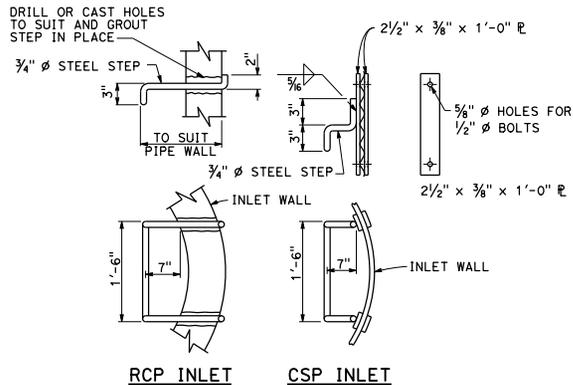

STEP DETAILS
(See Note 1)

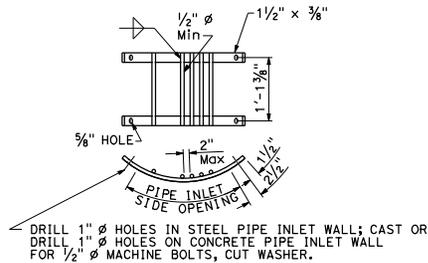

TRASH RACK DETAILS
(See Note 5)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**PIPE INLETS
LADDER AND TRASH
RACK DETAILS**

NO SCALE

D75C