




ALTERNATIVE CLIP BRACKET DETAIL

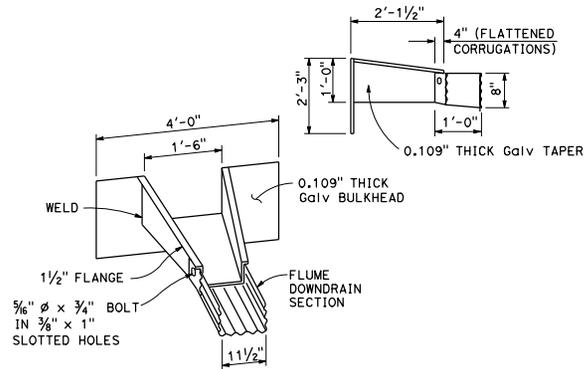

TAPERED INLET

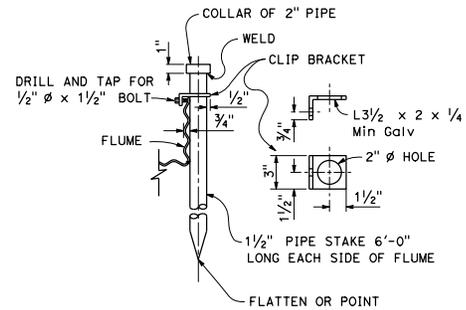


PIPE STAKE ANCHOR DETAIL

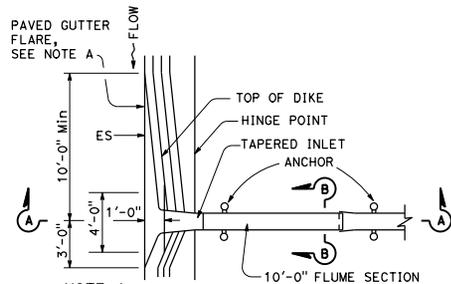


NOTE A
In sag location, use 10'-0" length of paved gutter flare on both sides of inlet.

PLAN


TAPERED INLET AND FLUME DOWNDRAIN

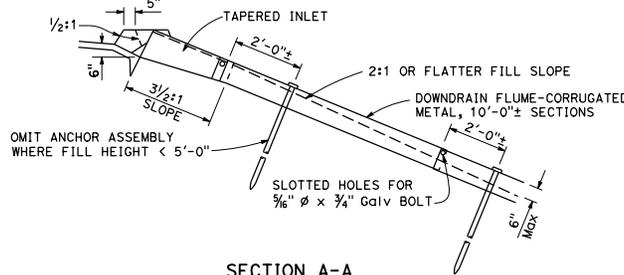

SECTION A-A

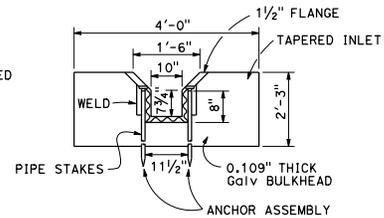


SECTION B-B

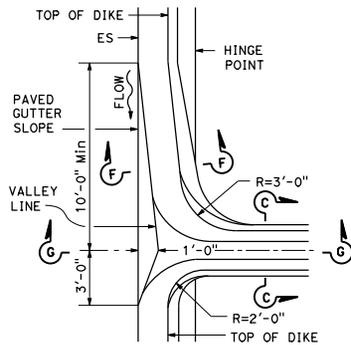

PLAN

MOUNTABLE DIKE


HOT MIX ASPHALT OVERSIDE DRAINS




SECTION C-C

See Note 1

NOTE:
1. Cross section of slope ditch may be semicircular, vee or trapezoidal.



SECTION F-F

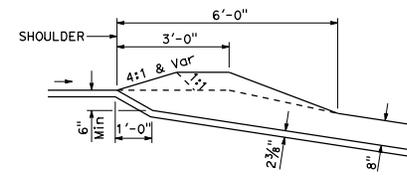

SECTION G-G

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

OVERSIDE DRAINS

NO SCALE

D87D

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER
Bruce D. Swanger
October 30, 2015
PLANS APPROVAL DATE
No. C61257
Exp. 6-30-17
CIVIL
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.