




DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS
 REGISTERED CIVIL ENGINEER				
October 30, 2015 PLANS APPROVAL DATE				
				
<small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>				

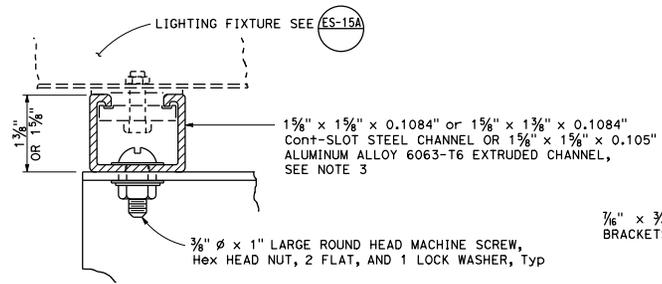


LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 1

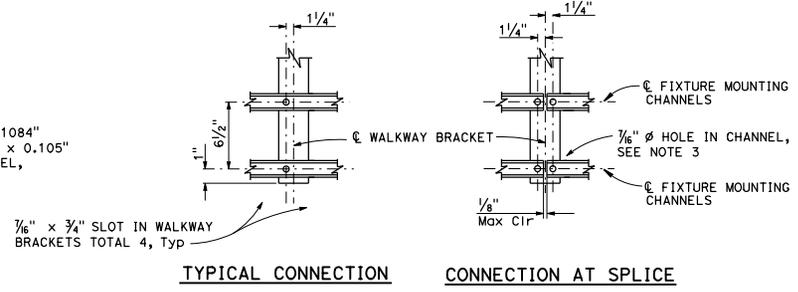


LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 2

366

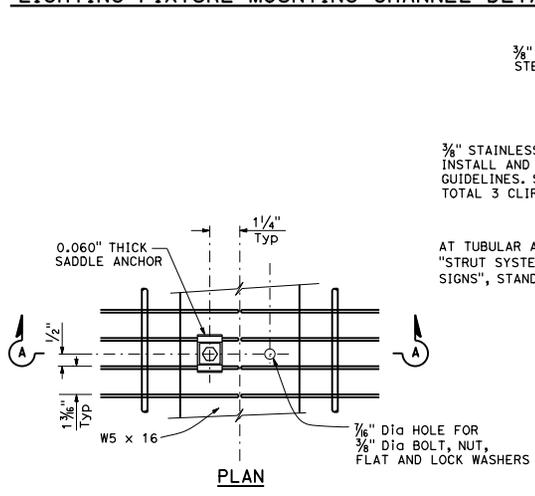


ELEVATION

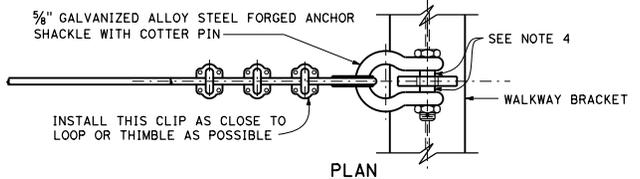


PLAN

NOTES:

1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 1/2" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating and light fixture mounting channels to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Contractor may substitute 1 5/8" x 1 5/8" x .1084" cont-slot steel channel with pre-punched slots not larger than 1/2" x 3". Slots shall be at bottom of channel and shall be parallel to channel. Slots shall be spaced not closer than 4" center to center.
4. Place an equal amount of washers on each side to align cable with end lug without restricting shackle bolt rotation or contacting cable.

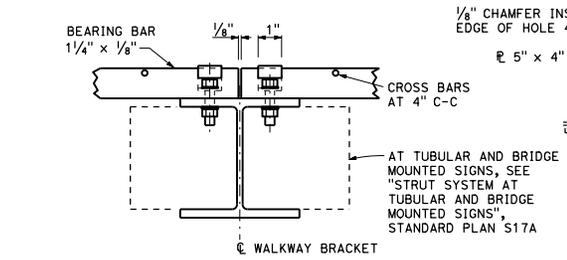

SECTION A-A
WALKWAY GRATING DETAILS
Shown at splice

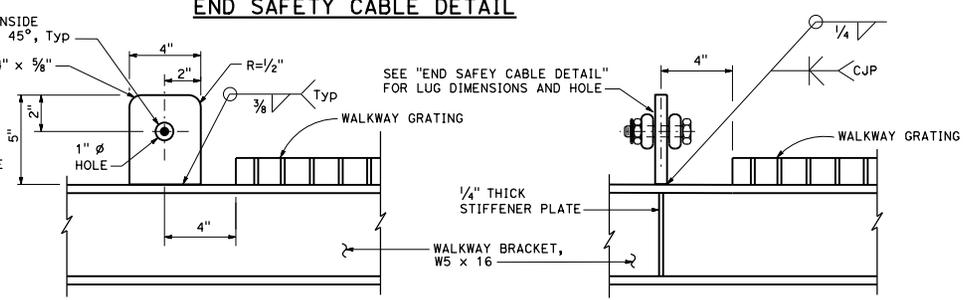

INTERIOR SAFETY LUG DETAIL
(At every walkway bracket between exterior walkway brackets)

END SAFETY LUG DETAIL
(At exterior walkway brackets)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
OVERHEAD SIGNS
WALKWAY DETAILS No. 2
NO SCALE

S17

2015 STANDARD PLAN S17