



D16+	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS


Robert B. Smith
 LICENSED LANDSCAPE ARCHITECT
 May 20, 2011
 PLANS APPROVAL DATE
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

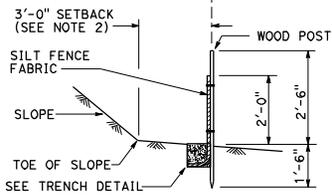


**SECTION A-A
TEMPORARY SILT FENCE**




**PLAN
POST AT JOINTS**
(SEE NOTE 3)



STAPLE DETAIL
(SEE NOTE 6)




**PLAN
END POST DETAIL**

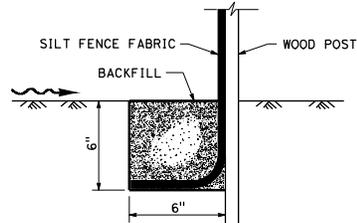


**SECTION
TRENCH DETAIL**

NOTES:

1. The down stream end of the temporary silt fence shall have the last 8' angled up slope.
2. Setback dimensions may vary to fit field conditions.
3. Posts to overlap and fence fabric to fold around each post one full turn. Secure fabric with 4 staples for each post.
4. Posts shall be driven tightly together to prevent potential flow-through of sediment at the joint. The tops of the posts shall be secured to each other with wire.
5. For each end post, fence fabric shall be folded around two posts one full turn and secured with 4 staples.
6. Minimum of 4 staples shall be installed per post. Dimensions shown are typical.
7. Maintenance openings shall be constructed in a manner to ensure that sediment is retained by the temporary silt fence.
8. Joint sections shall not be placed at sump locations.

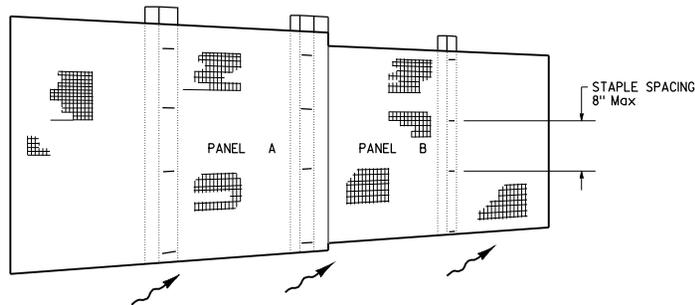


**PERSPECTIVE
SILT FENCE PANELS AT JOINTS**

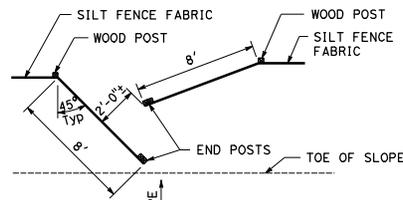

**PLAN
OPTIONAL MAINTENANCE OPENING DETAIL**

LEGEND

- TAMPED BACKFILL
- SLOPE DIRECTION
- DIRECTION OF FLOW

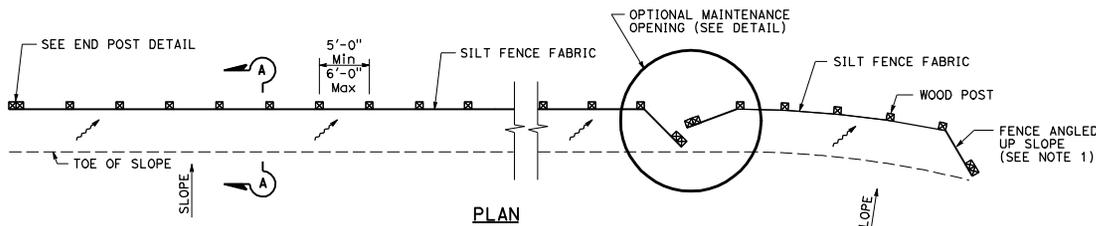

**PLAN
TEMPORARY SILT FENCE**

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**TEMPORARY WATER POLLUTION
CONTROL DETAILS
(TEMPORARY SILT FENCE)**

NO SCALE